

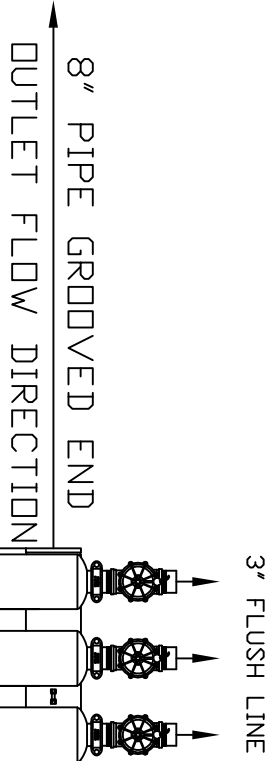
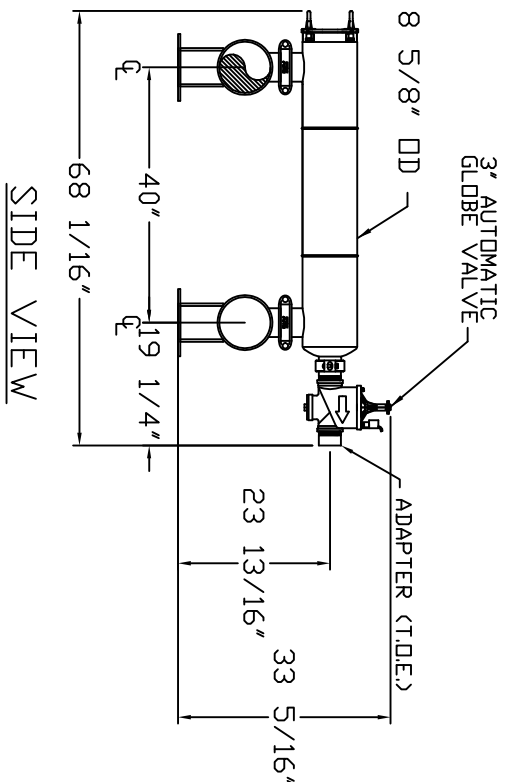


SS8-3A

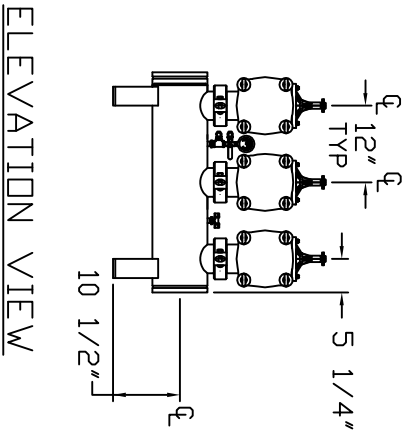

- NOTES:
1. DESIGN FLOW RATE 1200 GPM
 2. OPERATING PRESSURE 125 (MAX)
 3. ALLOW 44" (MIN) FOR CARTRIDGE SERVICE

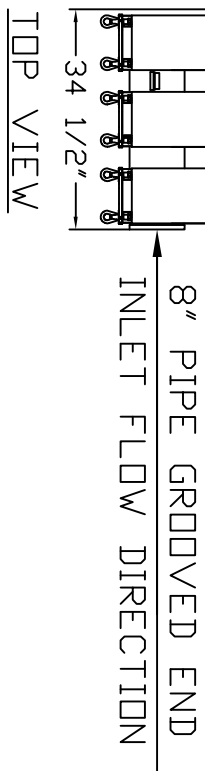

<p>THIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS CONFIDENTIAL AND PROPRIETARY TO YARDNEY. IT IS SUBMITTED TO YOU BY YARDNEY UNDER A LICENSED AGREEMENT. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEMS, WITHOUT THE WRITTEN PERMISSION OF YARDNEY. ANY UNAUTHORIZED USE OR DISCLOSURE OF THIS INFORMATION IS STRICTLY PROHIBITED AND WILL BE PUNISHED TO THE FULL EXTENT OF THE LAW.</p>				
NO.	REV.	DATE	BY	DESCRIPTION
A		JV/ 10-99		ADDED NEW LID
B		DTC 3-06		UPDATED AUTO GLOBE VALVE
C		DTC 10-12		REDRAWN HOUSING



SS8-3A (AUTOMATIC)
THRU-SCREEN FILTER
316L STAINLESS STEEL

9025000803