


SS8-6A


10" PIPE GROOVED END
 OUTLET FLOW DIRECTION

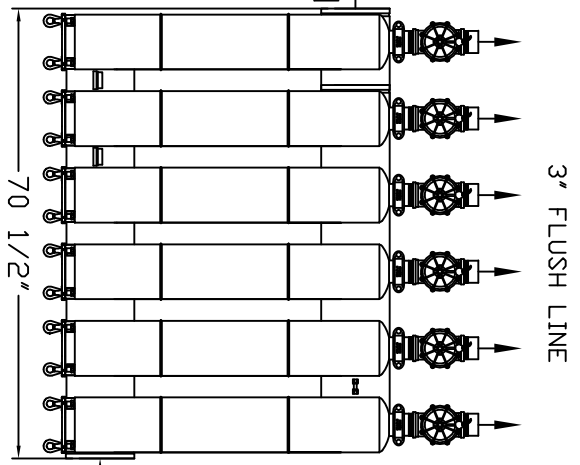


TOP VIEW

- NOTES:
1. DESIGN FLOW RATE 2400 GPM
 2. OPERATING PRESSURE 125 (MAX)
 3. ALLOW 44" (MIN) FOR CARTRIDGE SERVICE

10" PIPE GROOVED END
 INLET FLOW DIRECTION

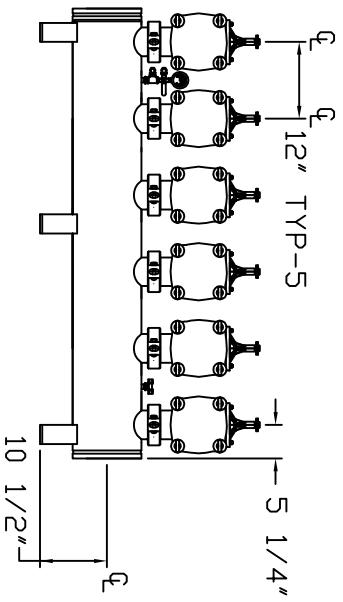

ELEVATION VIEW

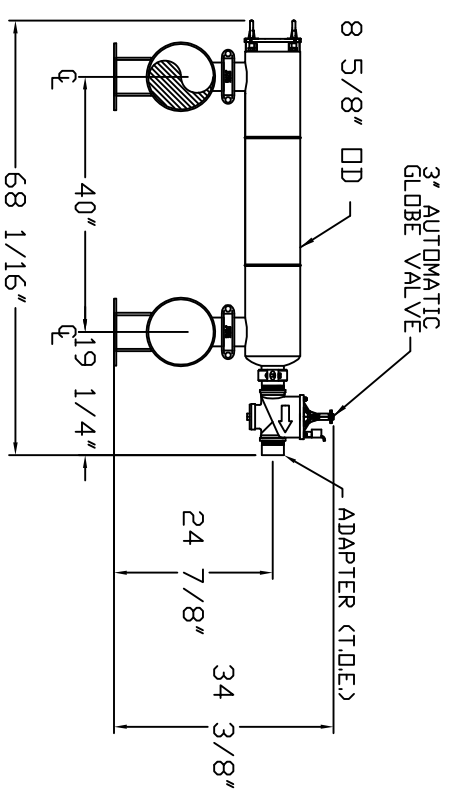

SIDE VIEW

THIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS CONFIDENTIAL AND PROPRIETARY TO YARDNEY. IT IS TO BE KEPT IN STRICTLY CONFIDENTIAL AND NOT BE LOANED, REPRODUCED, COPIED, REPRODUCED, TRANSMITTED, OR IN ANY MANNER DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF YARDNEY. ANY UNAUTHORIZED USE OR DISCLOSURE OF THIS INFORMATION IS STRICTLY PROHIBITED AND WILL BE TREATED AS A VIOLATION OF YARDNEY'S PATENT RIGHTS AND TRADE SECRET RIGHTS. ANY SUCH VIOLATION WILL BE SUBJECT TO LEGAL ACTION AND WILL BE RETURNED UPON REQUEST. COPYRIGHT YARDNEY WATER MANAGEMENT SYSTEMS, 1994.



NO.	A	REDRAWN HOUSING	BY DATE	DITJ 10-12	REV. A
NO.			REVISION		

ORDER NO.		9025000806
PROJECT NO.		
DATE	3-2006	
DESIGNER	DTC	
CHECKED BY		
LOCATION	SYSTEMS\SS\SS8	