



# Self Loading Mixer




## **Salient Features**


- · Specially designed blades for better mixing & faster discharge
- Powered Shovel gate for spillage free charging
- Loading arms mechanism designed for better pushing force & ease of operation while loading
- Single Joystick for all main functions
- Low centre of gravity

- Electronic weigh batching system with printer
- Live tracking & monitoring system (optional)
- Reversible operator post for better visibility
- Three way steering systems, ideal for working in confined spaces
- Short turning radius

### **Dimensions**

**CSLM 4000** 



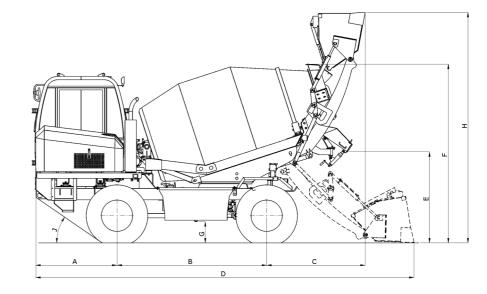


Α	1440
В	2650
С	1745
D	6700
Е	1610
F	3160
G	370
Н	4080
I	2394
J	34.5°

## **Technical Specifications**

S	r.	Details	
	1	Drum Output per batch	4 Cu.M.
2	2	Drum Capacity	5.4 Cu.M.
3	3	Drum Rotation	0-22 RPM
4	4	Bucket Capacity	600 Ltr.
į	5	Vehicle Speed	0-30 Kmph
(	6	Engine	KOEL 4R1040TA4 Diesel Engine 4 Cylinder Turbocharged, Inter- Cooled 110 HP/82 Kw @ 2500 RPM BSIII Emission Compliant
	7	Braking system	Hydraulic powered brakes
8	8	Gradeability	25.5 Deg/47.5%

Sr.	Details	
9	Tyre & Rim	16.0/70-20-14 PR
10	Fuel Tank	120 Ltr.
11	Hydraulic Tank	112 Ltr.
12	Water Tank	760 Ltr.
13	Water Pump Capacity	230 Lpm.
14	Chassis	Вох Туре
15	Net Vehicle Weight	7800 Kg. Approx
16	Laden Weight	17400 KG. Approx
17	Drive	Full Time 4 Wheel Drive
18	Wheel base	2650

Note: The technical specifications of the product may vary depending on the model and are subject to change without prior notice

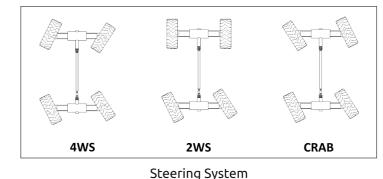





Short turning radius

Electronic batch controller

#### **Product Range**





















© 0265-6132900, 3000300 sales@conmatindia.com, info@conmatindia.com

