


# TECHNICAL DATA SHEET

## LDL 2

**TRIPAK**<sup>®</sup>  
Super Lubricants

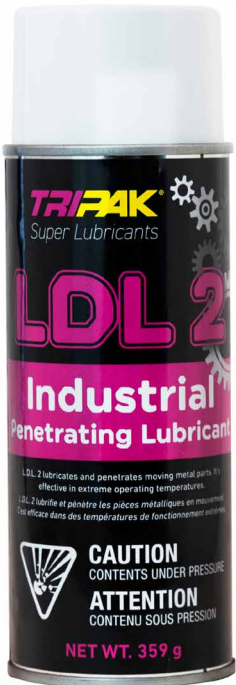

### Product Description

LDL 2 is an oil-soluble, heat-stable industrial lubricant. It penetrates rust and other forms of corrosion, cleaning the surface, and sealing the metal with an extreme pressure barrier.

### Benefits

**Penetrates Rust and Corrosion.** LDL 2 removes rust and corrosion from metal surfaces.

**Cleans and Protects Metal Surfaces.** LDL 2 cleans metal surfaces and leaves behind a barrier that helps prevent further corrosion and wear.

**Lubricates Sticky Mechanisms.** LDL 2 seals the metal with a long-lasting extreme pressure barrier that allows metal parts to move smoothly.

**Reduces Friction, Heat, and Wear.** Applying LDL 2 to metal surfaces reduces friction, heat, and wear better than the leading industrial lubricant.

### Directions

Spray or wipe LDL 2 onto the surface or unit to be treated. Apply to remove rust and corrosion, and to lubricate metal surfaces. Re-apply every maintenance period to help prevent friction, heat and wear. LDL 2 retains its effectiveness from -30°C (-22°F) to 200°C (392°F).

### Specifications

**Specific Gravity:** Range 1.050 - 1.070 @ 75°F/23.9°C

**% H<sub>2</sub>O:** Not to exceed 0.05% (500 PPM)

**Colour:** Dark Brown

**Viscosity:** 9.6 ± 5 centipoise @ 75°F/23.9°C (Brookfield Viscometer Model LVF)

**Solubility in Water:** Insoluble

**Composition:**

Petroleum Based Carriers (under 50% by weight)  
Actives (over 50% by weight)  
(Specifications may vary ± 3%)

**Odour:** Slight

**Ash:** 0.23% ± 0.1% @ 1427°F /775°C

### Applications

- Gears
- Valves
- Bearings
- Open Bearings
- Tools
- Linkage Systems
- Cables and Chains
- Hinges
- Sliding Doors
- Nuts and Bolts

**DC&B Supply**  
**420 W 10th St**  
**Pratt, KS 67124**  
**dcbsupply.com**  
**620-388-7926**

