



== Caution ! ==

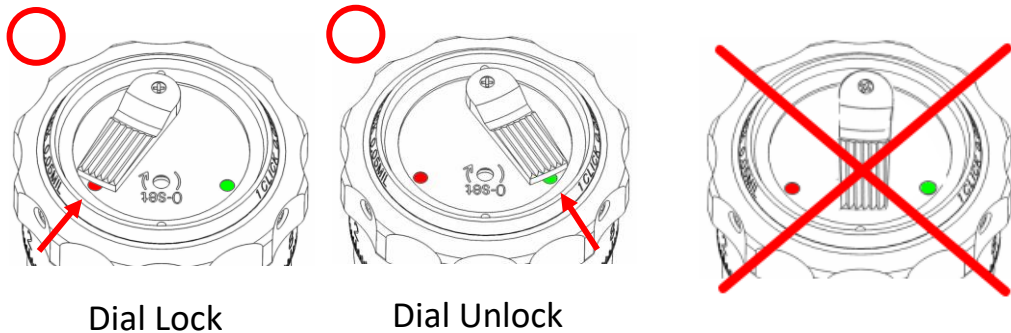

Elevation and Windage dial locking mechanism

Please set the Lock Lever on top of the dial to either the green or the red mark as far as it will go. If you rotate the dial with the Lock lever set at the red mark or between the green and the red mark, the locking system will be damaged. Please make sure that the lock lever is set at the correct position.

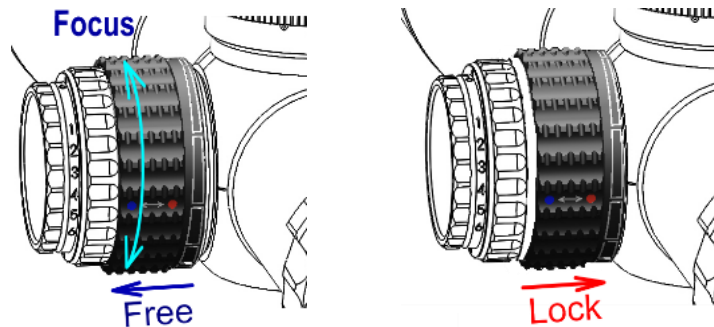

Focus dial locking mechanism

When you lock the focus dial, please push it in as far as it will go. When you unlock the focus dial, please pull it out as far as it will go. If you rotate the focus dial in between or at a locked position, the locking system will be damaged. Please make sure to rotate the focus dial at the correct position.

(Note)

The aim of the Locking mechanism of Elevation, Windage, Side focus dials is to prevent the dials from accidentally rotating while on the move during competitions or hunting. As the lock is not stiff, if you rotate the dials at incorrect positions with strong force it may lead to the damage of the locking system. Also once the dials are in a locked position, please make sure not to rotate them.

If any accident or misuse of the locking Elevation, Windage and Focus dials lead to the damage of the locking system, DEON will repair it for a fee. By any chance the locking system may damage, it will not affect other than the locking mechanism itself. Dials can be used and E/W dials will still track correctly.