

UniqueTek “Tips” File #20: “Stuck Case Removers”

Rev. 6; 02/2026

By Lee Love

Sooner or later it happens to everyone ... a case gets stuck in the full-length resize die. By far the most common cause is no case lubrication. But there are various possible reasons.

- Improper case lubrication (no lube, too little/incomplete lube or poor-quality lubricant.)
- Dirty case
- Wrong case for the sizing die
- Wrong sizing die for the case

Regardless of the cause, if you are not prepared with a stuck case removal kit, you will be dead in the water. And using brute force to remove the case can damage the die. A stuck case removal kit provides an easy, effective solution to the problem and most of the major die manufacturers sell one, including Forster®, Frankford Arsenal, Hornady®, Lyman®, RCBS®, Redding and UniqueTek. There are also a few kits to be found on eBay and other web sites. But most I’ve seen offer no advantages over the commercial kits described herein ... and their availability comes and goes too fast to keep up with ... so will not be included.

There are three basic types of stuck case removal kits;

- 1) Screw
- 2) Punch
- 3) Press Mounted

WARNING: Do not attempt to use any type of stuck case remover with cases containing live primers or with loaded ammunition. Serious injury could result!

One thing that should be noted is that the point at which a handloader figures out that they have a stuck case, is usually the moment when the case rim is sheared off. So, stuck case removers are designed with that in mind. In fact, none of the stuck case removers described herein depend on the case rim for removal of the stuck case.

Screw

Most of the currently available stuck case remover kits use a 1/4"-20 screw. The primer pocket is drilled out, the hole threaded, and the screw used to literally jack the stuck case out of the die. They are by far the most popular and cost effective type of stuck case remover, and will work with most dies.

The physics behind this design is that a 1/4"-20 screw can generate tremendous linear force (potentially over 3000 lbf or 1.5 US Tons).¹ Of course, the threads in the brass are likely to fail well before that much force is applied as brass is weaker than steel and thread engagement is limited to the thickness of the case web.

Examples of this type of stuck case remover include:

- Hornady® #050033 MSRP=\$30.60
- Lyman® #7680350 MSRP=\$29.95
- RCBS® #9340 MSRP=\$22.99
- Redding #22000 MSRP=\$44.56



Each of these kits contains essentially the same list of components.

- #7 Drill Bit (A #7 drill bit is the recommended size [0.2010"] for 1/4"-20 threads.)
- 1/4"-20 Thread Tap
- 1/4"-20 Socket Head Cap Screw (1" to 1-1/2" length.)
- 3/16" Long Arm Hex Wrench (Not included in Hornady® kit.)
- Stuck Case Remover Body

The **Lyman® Stuck Case Remover Kit** deserves special mention for several reasons.

1. The Stuck Case Remover Body:

- Is threaded inside and screws onto the 7/8"-14 threads of the die body.
The Stuck Case Remover Body of all the other kits listed above is not threaded and has only a counterbore or chamfer on the mouth to help keep it centered on the die body.
- Serves as a guide for the drill bit and thread tap ... ensuring that the hole is drilled and threaded squarely.
- Has flats on the sides to make clamping in a vice easy and secure ... which also prevents scratching up the die body or damaging the die threads.

2. A Tap Holder is Included:

- It includes a unique Tap Holder that utilizes the long arm hex wrench as a T-handle. If you don't already have a good tap handle, this is a bonus.



Instructions:

1. Remove the Expander/Decap Rod lock nut and back the rod out until the decap pin is free of the primer flash hole. Do not attempt to remove from die.
2. Place sized die upside down in a vice. Pad the vice jaws with wood to prevent scratching the die body.
TIP: Don't have a vice? Just install the die upside down in your press. Remove the die lock nut and install it on top of the press as this will prevent it from loosening during Steps 3 through 5.
3. Using the #7 drill bit, drill straight through the primer pocket and primer flash hole and completely through the case web. DO NOT allow the drill bit to extend past the case web as this would damage the Expander/Decapping rod.

NOTE: If using a Lyman® kit, the Remover Body is screwed onto the die body prior to drilling or tapping threads and serves as a guide.

TIP: Attach a drill stop to the drill bit to prevent it from entering the case deeply enough to damage the Expander/Decap unit. You only need to drill through about 1/4" on most cases. I set it to 5/16" so I'm certain that I've drilled completely through the case web.



4. Using the 1/4"-20 thread tap, cut threads in the hole drilled through the case web. Tap threads completely through the hole but DO NOT allow the thread tap to extend far enough into the case that it damages the Expander/Decapping rod.

TIP: Apply a few drops of oil to the thread tap to make cutting easier.

TIP: Turn the tap 1 full turn clockwise then 1/2 turn counterclockwise to release brass chips. Repeat until the hole is fully tapped.

5. Place the Stuck Case Remover Body over the case head. Insert the Socket Head Cap Screw down through the hole in the Stuck Case Remover Body and engage the threads just tapped in the case head. Using the hex wrench, continue turning the Socket Head Cap Screw until the stuck case is pulled loose.

TIP: Apply a drop of oil to the screw threads where they engage the brass.


TIP: Applying penetrating oil to the outside of the case can aid removal.

6. Now that the case is free of the die, remove the Expander/Decap Unit from the case mouth.

Expander/Decap Unit Removal

You will notice that the instructions stop short of explaining just how to remove the Expander/Decap Unit. It is unlikely that you will be able to simply pull it out through the case mouth with your fingers. Here is why...

Most cases become stuck when they are fully inserted into the die. At that point, the expander ball has already passed completely through the case neck and the case neck is being resized by the die (see drawing at left). The case neck is being squeezed tightly by the die making the ID of the case neck smaller ... greatly increasing the amount of force needed to pull the expander ball back through. Once the case is unstuck, the brass of the case neck

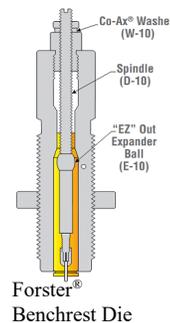

springs back slightly, thus requiring less force to pull the expander bead back through the case neck. But, even then, it will not simply slide out.

If the die uses a threaded spindle (like the Forster® Expander/Decap unit shown at right), it is easy to just cut off the case head and remove it from that end after removing the Spindle Lock Nut and Spindle Bushing. But some dies don't use a threaded spindle (e.g., the Redding Expander/Decap unit shown at far right). In this case, the only way to remove the expander/decap rod is to pull it back through the case mouth.

If there is enough of the rim remaining on the case, you can reinstall the die in the press, raise the ram and slide the shellholder into place ... simultanelusly engaging the ram and the remains of the case rim. Rotate the shellholder (or the die) to a position where it gets the most grip of the remaining rim. Then lower the ram slowly to pull the case off the Expander/Decap assembly. Of course this only works on single-stage presses. If you have a progressive press, you'll need another solution.



Another way of removing the Expander/Decap assembly is to clamp the base of the case in a vice, grasp the Expander/Decap assembly with pliers, then tap the pliers with a hammer. Admittedly, this is a less than graceful procedure and the possibility of damaging the Expander/Decap assembly is high. I wish there was something like a small slide hammer designed specifically for this task. I have seen some kits to convert a pair of locking jaw pliers (e.g., VICE-GRIP®) into a slide hammer, but they are expensive.

NOTE: The Forster® Stuck Case Removal Kit, described in the next section, is specially designed to remove spindle type Expander/Decap units prior to removing the stuck case (see details on page 4).

Regardless of which remover is used, damaging parts of the Expander/Decap assembly is possible. In particular, the dacap pin, expander bead and collet. But it is also possible to bend the rod or damage the threads of spindle type assemblies. Therefore, it is a good idea to keep spare parts on hand to rebuild it ... or replace it entirely.

One of the drawbacks of this type of stuck case remover is that you can't see your progress. If the case is seriously stuck, you could be stripping the threads out of the case web, and not know it until it is too late. Nine times out of ten, this isn't a problem. But it is that one-in-ten chance that will bite you in the butt if given the opportunity. What would be really handy is a slot machined down the side of the Stuck Case Remover Body so that you can watch what is going on.

TIP: A machine shop can easily cut a slot for you. Don't cut all the way to the mouth of the stuck case remover body. Leave a little bridge of metal there for strength. The photo at right shows a Hornady® Stuck Case Remover body with a 1/4" wide slot machined in the side. I'd plan on making the slot a bit wider than in this example. About 3/8" wide will give you a better view. Bright illumination also helps a lot! All of the stuck case remover bodies mentioned above are steel, so I would not expect this to significantly weaken them.



Punch

Punch type kits use a solid rod to punch out the stuck case from inside once the decap rod has been removed. They include a special hex nut to extract the decap rod. I was able to find only two kits of this type on the market.

- Forster® #SC1000 MSRP=\$34.00
- RCBS® #9355 MSRP=\$14.99



Both kits contain essentially the same list of components.

- Hex Nut - Small (#10-32 thread)
- Hex Nut - Large (1/4"-28 thread)
- Protective Washer (Not included in RCBS® kit.)
- Removal Rod - Small (3/16" dia.)
- Removal Rod - Large (1/4" dia.)

– The RCBS® kit is described as being “... used for Size Sies that use Neck Busings”.

– The Forster® kit is described as being designed to work with “any sizing die with threaded spindles except Lee Collet Dies”.

Indeed, if you do use resize dies of this type, then this type of stuck case remover kit is preferable to the “Screw” type remover kits described earlier.

Instructions for Forster® Kit:

1. Unscrew the Spindle Locknut, Co-Ax® Washer and Spindle Bushing from the Decapping/Expander Assembly and set aside.

Note: The Spindle Bushing may be difficult to unscrew depending on where the Expander Ball is located inside the stuck case. Using a screwdriver, loosen the Spindle clockwise for a complete turn, which will lower the Expander Ball. Repeat several times as needed.

2. Place sizing die in a vice. Pad the vice jaws with wood to prevent scratching the die body.

TIP: Instead of a vice, install the die in your press.

3. Place the Protective Washer on top of the die body.

NOTE: The Protective Washer acts as a bearing between the top of the die and the bottom of the Hex Nut and serves to protect the top of the die from being scratched up.

TIP: If you have an RCBS® kit, just add a 5/16" flat washer from the hardware store.

4. Select the correct Hex Nut for the sizing die.

Forster® Sizing Dies: Use Hex Nut - Small (#10-32 thread)

Other Sizing Dies: Calibers .22 to .25 - Use Hex Nut - Small (#10-32 thread)

Calibers 6.5mm to .50 - Use Hex Nut - Large (1/4"-28 thread)

5. Place a drop of oil on the Hex Nut threads.

NOTE: Lubrication is critical as there will be a LOT of force on the threads while pulling the Expander Ball back through the case neck.

6. Using your fingers, screw the Hex Nut onto the Spindle until it contacts the Die Body.

7. Using a screwdriver to hold the top of the spindle from turning, use a wrench to turn the Hex Nut, raising the spindle. Continue until the spindle comes free of the sizing die.

8. Remove the Hex Nut from the spindle and set aside.

9. Select the correct Removal Rod size for the sizing die.

10. With the rounded end down, insert the Removal Rod into the sizing die until it makes contact with the web of the stuck case.

11. Using a hammer, sharply strike the flat end of the Removal Rod. The stuck case will fall out the bottom of the die.

It should be noted that these kits remove the Expander/Decap assembly while the case neck (indeed the entire case) is still being squeezed by the die. So the force required to pull the expander bead back through the case neck will be very high ... much higher than if the case neck is first disengaged from the die. Therefore it is more likely that you will damage some part of the Expander/Decap assembly.

Press-Mounted Kits

There are only three products currently in this category. All of them use the power of your single-stage press to pull the stuck case from the die. But they go about it in slightly different ways. Regardless, there are a few considerations to keep in mind no matter which one you use.

1. Use a Strong Press

Significant forces will be applied to the press. So an O-frame press with a strong frame and strong linkages is recommended. I would not recommend using any C-frame press (e.g., Lee Breech Lock or Lyman® Brass-Smith® Ideal) or a Turret press.

2. Use a Solid Bench

The press must be solidly mounted on an absolutely solid bench. If the press/bench is moving, energy will be lost making it much more difficult, if not impossible, to remove the stuck case.

3. Adjust for Greatest Mechanical Advantage

You should adjust the die so that stuck case removal begins with the press ram as close to top dead center (TDC) as possible. This is the point where the press linkage has the greatest mechanical advantage.

Frankford Arsenal

Frankford Arsenal announced this new stuck case remover in the fall of 2017. The kit description says it “provides optimal leverage with use of reloading press. There is no need to remove or adjust the sizing die and there are no extra tools required”. The Remover Clamp attaches to the ram just like a shellholder and is essentially a miniature vice that grips the entire base of the stuck cartridge case ... not just the rim (see closeup photo). The down stroke of the ram pulls the stuck case from the die. It is stated to handle cases from .17 Rem (0.378") to .338 Lapua (0.588").

- Frankford Arsenal Platinum Series Stuck Case Remover #1078192 MSRP = \$43.99

The kit contains only two components.

- Stuck Case Remover
- Long Arm Hex Wrench (Size not mentioned.)



Instructions:

1. Insert the Stuck Case Remover into the shell holder, ensuring it fits snugly.
2. Clamp down on the stuck case using the device.
3. Activate the press lever to separate the case from the die quickly and efficiently.
4. Once the case is free, remove the Stuck Case Remover from the shell holder.
5. Lower the press ram. This will remove the stuck case completely from the die.

That's all there is to it. You don't need to remove the die from the press and you don't need to back out the Expander/Decap unit as there is enough space provided within the Remover Clamp to accommodate the decap pin. And it solves the problem of how to get the unstuck case off the Expander/Decap unit.

NOTE: The photo showing a rifle case clamped in the remover is not quite correct. The case should be fully inserted down into the remover such that it clamps onto the entire base (or web) of the case ... not just the rim. You can see this in the design of the jaws (see closeup photo). Clamping on just the rim as shown in the photo will guarantee failure. It would help if the Instructions emphasized the correct clamping technique. And it appears that the photographer was not a handloader.

However, I would caution against the temptation to simply resume resizing brass without first cleaning, inspecting, and lubing the die! And I'd recommend removing the die from the press to facilitate that process ... especially the inspection part. After all, a full-length resize die is the least complicated die to set up ... on either a single-stage or progressive press ... so removing it is no big deal. In the end, the Frankford Arsenal kit doesn't fully eliminate the need to remove the die from the press.

UniqueTek, Inc.

UniqueTek launched a press-mounted stuck case remover kit on 4/18/18. It is a “hybrid” approach as the case primer pocket and web are drilled out and threaded (like “Screw” type kits) but then the actual case removal is done on the press (Similar to the Frankford Arsenal kit on page 5.).

- UniqueTek Stuck Case Remover
Item No.: T1663 MSRP = \$27.95

The kit contains the following components.

- #7 Drill Bit
- 1/4"-20 Thread Tap
- Stuck Case Remover Assembly



The Stuck Case Remover assembly is installed on the press ram ... just like a shellholder. But instead of grasping the rim, it threads into the case web.

Instructions:

1. Remove Die from press and clamp in a vice.
2. Back out the Expander/Decap Rod as far as possible.
3. Drill through the primer pocket and case web then thread the hole 1/4"-20.
4. Reinstall Die into press.
5. Install the Stuck Case Remover Assembly on the press ram as if it were a shellholder. You must start with the screw turned fully down until the thumb nut (the black knurled disk) contacts the Stuck Case Remover body (as shown in the photo at right).
6. Raise the ram gently until the tip of the 1/4"-20 screw contacts the case, then turn the thumb nut to engage the threads cut into the case web. Continue until the screw is fully engage and the thumb nut contacts the base of the case.
7. Lower the press ram. While applying firm pressure to the press operating handle, bump the handle with the palm of your other hand. This will remove the stuck case completely from the die.



Note: The instructions that come with the kit are much more detailed than this but are simplified here for brevity.

That's all there is to it. And it solves the problem of how to get the unstuck case off the Expander/Decap unit. You still need to remove the die from the press to drill and thread the case web, but you then get to use the mechanical advantage of your press to smoothly remove the case from the die body and from the Expander/Decap assembly.

Hornady®

Even after all the web searches I performed while seeking out every stuck case remover kit in existence, I somehow managed to miss this press-mounted stuck case remover. I called Hornady® and they said it was discontinued (circa 2012 or 2013). It was replaced with the screw type kit described earlier in this article (see page 1). They did not offer a reason for discontinuing it. But you may be able to find used units on the web.

NOTE: The old kit and new kit share the same Hornady® Item No. So, if you find it for sale on a web site, contact the seller to make certain that it really is the old kit you are purchasing.

- Hornady® Stuck Case Remover
Item No.: 050033 MSRP = \$??.??

The kit contains the following components.

- #7 Drill Bit
- 1/4"-20 Thread Tap
- Remover Body



The Remover Body is installed on the press ram ... just like a shellholder ... and a stud threads into the case web. The Remover Body has hex lands machined into it for a wrench to assist screwing it into the case web.

Instructions:

1. Remove Die from press and clamp in a vice.
2. Back out the Expander/Decap Rod as far as possible.
3. Drill through the primer pocket and case web then thread the hole 1/4"-20.
4. Reinstall Die into press.
5. Install the Stuck Case Remover Assembly on the press ram as if it were a shellholder.
Note: Can be installed only on a single-stage press.
6. Raise the ram gently until the tip of the 1/4"-20 screw contacts the case, then use a wrench to turn the Remover Body to engage the threads cut into the case web. Continue until the screw is fully engaged and the top of the Remover Body contacts the base of the case.
(Photo at right shows it only partially screwed into the base of the case.)
7. Lower the press ram. This will remove the stuck case completely from the die.



The major difference between the Hornady® product and the UniqueTek product is that, with the Hornady® system, a wrench must be used to turn the entire Remover Body. Depending on the press, there may be limited space in which to swing the wrench, making it a slow and tedious process to screw it into the case web. The UniqueTek product has a distinct advantage in this regard as no wrench or other tool is needed. Only the screw is turned and a thumb nut is provided that makes turning it easy with just your fingertips.

Kits That Don't Fit The Other Categories

In my research, I stumbled upon a unique stuck case remover that just doesn't fit into any of the three categories previously discussed. But, as of this revision (01/26), I could no longer find it for sale on eBay or anywhere else on the web ... not even a used one. Because it was so unique, I decided not to delete it from this Tips file. And who knows, maybe it will make a comeback!

FRANK N GONZ™

This is a totally different approach to stuck case removal. It uses a sleeve with a split collet to grip the case around the web as it is pulled into the remover body via a threaded rod and hex nut.

- FRANK N GONZ™ Stuck Case Remover
#1078192 MSRP = \$87.99
NOTE: Sold only sold on eBay.
(eBay Seller: maccnc11)



The kit contains only one component.

- Remover Body

I contacted the manufacturer (back when I first discovered this) and asked for more information and a copy of the user manual. The reply was; "There is no instruction manual". So everything below is the best description I could muster by looking at the various photos he posted on eBay.

With the FRANK N GONZ™ the die must be removed from the press, but there is no need to pull back the Expander/Decap assembly or to drill and tap the primer pocket. A sleeve with a split collet grips the base of the stuck cartridge case. As the hex nut is turned, the sleeve is drawn back into the remover body, clamping it solidly onto the case and drawing the die body up against the end of the remover body. Continued turning of the hex nut draws the sleeve further into the remover body until the case comes free of the die body.

Instructions:

1. Remove die from press.
2. Configure Remover Body for the type of cartridge case (.308 Win or .223 Rem) by flipping the Sleeve around if needed. Leave the Sleeve loose enough that the split collet is open enough to get around the base of the case.
NOTE: It is unclear if the Sleeve is reversible or if the unit comes with two different Sleeves. But the photos on eBay show only one sleeve.
3. Insert the base of the case into the Sleeve and slide back into Remover Body. Tighten the hex nut with your fingers as you go.
4. Clamp Remover Body into a vice.
5. Use a wrench to turn the Hex Nut. As the nut is turned, the Sleeve will be drawn back into the Body ... pulling the case along with it. Continue turning until case is removed from die.

It is quite straight forward. You do need to remove the die from the press but you don't need to back out the Expander/Decap unit. The description on eBay indicates that it has enough travel to also pull the case off the Expander/Decap unit. Although the expander/decap assembly does not need to be removed. But, as always, I caution against simply resuming resizing brass without first disassembling, cleaning, inspecting, and lubing the die.

One limitation of this product is that it is designed to remove only .308 Win and .223 Rem cases. But those are the two most widely handloaded rifle cartridges ... possibly in the world. But you could also use it on cartridges that use the .308 Win or .223 Rem as a parent case.

- .308 Win: .243 Win, .260 Rem, 7mm -08 Rem, .338 Fed and .358 Win (a.k.a. 8.8x51mm), etc.
- .223 Rem: 17 Rem, 204 Ruger, 25-45 Sharps, 6.5 PPC, 6x45mm, 6mm PCC, 300 AAC BLK, etc.

The DIY Approach

If you didn't plan ahead for the possibility of a stuck case ... or just prefer the DIY approach to things ... you can always try to pull together the parts to make your own stuck case puller.



DIY Screw Type

Building your own screw type stuck case remover is quite easy ... and much more easy than either of the other types of stuck case removers. Most of the items you need are relatively inexpensive and easy to find a hardware or home improvement store.

You'll need these components.

- #7 Drill Bit (\$5.99) ¹
- 1/4"-20 Thread Tap (about \$9.59) ²
- 1/4"-20 x 1" to 1-1/2" Socket Head Cap Screw (about \$2.00 ea) ³
- 3/16" Long Arm Hex Wrench (\$0.79)
- Stuck Case Remover Body (described below)

NOTE: Prices from Ace Hardware web site.

- ¹. A #7 drill bit is the optimum size (0.2010"). You can substitute a 13/64" drill bit (0.2031") if you must, but don't use a 7/32" drill bit (0.2188") as the larger hole will reduce the thread depth too much ... making for weaker threads in the brass.
- ². The thread tap should be a "Plug" tap, not a "Taper" tap. The length of the taper (aka chamfer) is much shorter on a Plug tap (just 3 to 5 threads) compared to a Taper tap (7 to 10 threads). So a Taper tap will extend further into the case and potentially damage the Expander/Decap assembly. Fortunately, "Plug" taps are the most common type.
- ³. You can substitute a hex head bolt for the Socket Head Cap Screw ... in which case you will need a 7/16" wrench instead of the 3/16" Long Arm Hex Wrench.

The stuck case remover body can be made from any number of items you may have around. A 1/2" or 13mm socket, 1" length of copper pipe or solder coupling fitting. Add a 1/4" fender washer to cap off the end and hold the Socket Head Cap Screw. The length of the Socket Head Cap Screw will depend on the length of your Stuck Case Remover Body. You want the screw to be long enough to just pass through the web of the case but no further.

TIP: Here is my favorite way of fabricating a DIY Stuck Case Remover Body.

Parts:

- 1/2" Copper Tube Cap (\$1.15)
- 1/2" Copper Coupling without Stop [aka Slip Coupling] (\$1.41)
- NOTE: It is critical that you get a "slip" coupling.
- Rigid Copper Pipe; about 3 inches long (2' Stub @ \$14.35)
- 1/4"-20 x 1-3/4" to 2" Socket Head Cap Screw (\$9.33/4pk)

NOTE: Prices from Home Depot web site.

Drill a 1/4" hole in the center of the Tube Cap. Place the Tube Cap on the end of the Pipe then slide the Coupling over the Pipe until it is butted up against the Tube Cap. Mark where the copper pipe is flush with the end of the Coupling. Disassemble and cut off pipe where marked. Cut as squarely as possible. A pipe cutter is recommended but a hacksaw will get it done. Clean up cut end with sandpaper to remove any burrs. Reassemble parts and secure with superglue[†]. The photo at right shows the parts after the rigid copper pipe has been cut to length but before final assembly. The final assembly is a bit longer than needed, but you can easily cut it shorter. The whole assembly only costs a few dollars, a few minutes of time, and only a few basic tools are needed.

[†] You don't need to go to the trouble of soldering the parts together. Super glue works just fine and is really just to keep the parts from slipping apart.




DIY Punch Type

Building your own punch type stuck case remover would seem to be easy. But it is not as easy as it appears. Although the “Removal Rods” are quite easy to make from any 3/16" dia. and 1/4" dia. steel, brass or aluminum rod stock, and the Protective Washer is a “no brainer”, the “Hex Nuts” are much more complicated than they appear.

You'll need these components.

- Hex Nut - Small (#10-32 thread)
- Hex Nut - Large (1/4-28 thread)
- Removal Rod - Small (3/16" dia.)
- Removal Rod - Large (1/4" dia.)
- Protective Washer

These “Hex Nuts” are highly specialized components. As you can see in the diagram at right, the “Hex Nut” is much longer than a standard hex nut, is counterbored more than half way through, and the outer diameter is much larger than normal for either #10-32 or 1/4-20 hex nuts. Approximating this part with common off-the-shelf hardware is a challenge. I tried several approaches but the end result cost more than either the Forster® or RCBS® kitss.

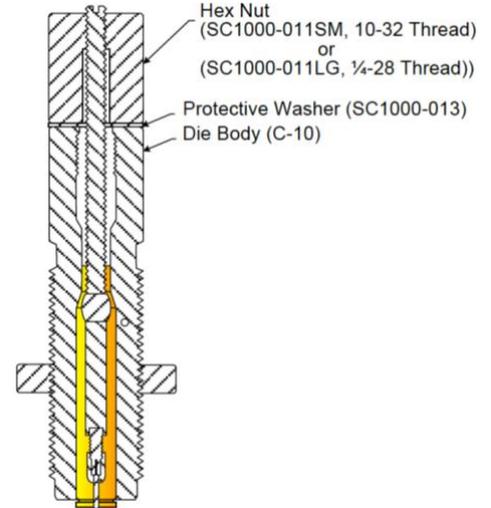

DIY Press-Mounted Type

Building your own press-mounted stuck case remover is simply not a DIY project. If you happen to have the machine tools and experience, you certainly could duplicate one of the three kits shown earlier, but it would end up costing many times the kit price in materials and time.

The “Don’t” DIY Approach

Some die manufacturers offer a stuck case removal service. You ship the die back and they'll remove the stuck case for you ... for a price.

For example, Redding Reloading offers stuck case removal service for \$20.00. The service includes:

- Stuck Case Removal (on Redding Dies Only.)
- Dimensionally Inspect Die
- Re-polish Die
- Ultrasonically Clean Die
- Return Die to you postage paid with a sample of Imperial Sizing Die Wax.

Optional: Add \$23.00 to include a Redding Stuck Case Removal Kit (#22000 MSRP=\$44.56 / See photo on page 1).

Check with the manufacturer of your die to see if they have a stuck case removal service. The big disadvantage is that you'll be without the die for more than a week.

Here are several others that I found and their current fee.


- Forster®: \$11.00 to remove case and repolish die plus cost of any needed replacement parts.
- Hordady®: No charge to remove case but \$15.00 for return shipping via FedEx or UPS. Will not ship via USPS.
- RCBS®: A Google search suggested a stuck case removal service is available, but I couldn't find any details on their web site. So, you'll need to call them and inquire.



The Freezer Trick

I've seen postings in multiple forums that recommend placing the die in the freezer for at least a couple of hours (preferably over night). The theory is that since brass expands and contracts more than steel as temperature changes, freezing will shrink the case a bit more relative to the die body ... just enough to help get it loose.

Coefficient of Thermal Expansion: Cartridge Brass (Alloy C26000) = 11.1×10^{-6}
Die Steel (Alloy 1010) = 6.78×10^{-6}



This would certainly seem like sound advice but, having never tried it myself, I decided to ask a Technical Support person at a major reloading die manufacturer. He said that he had tried it and it didn't work for him ... even after leaving it in the freezer overnight. He further explained that he believes that the cartridge case is already under so much compression in the die, that freezing it can't shrink the brass enough to make up for the compression.

So I did the calculations for brass shrinkage at increasingly colder temperatures for a .450" OD brass cartridge case and a starting temperature of 72°F.²

- Home Freezer at 0°F = 0.4496"
- Dry Ice at -109.3°F = 0.4491"
- Liquid Nitrogen at -321°F = 0.4480"

That isn't very much shrinkage at all, especially at home freezer temperature. And don't forget that the ID of the die is also shrinking ... albeit less. And, obviously, colder is better. Although liquid nitrogen is out of the question for most of us, dry ice is readily available and not very expensive.

CAUTION: Safe handling of dry ice requires insulated gloves, proper ventilation, and avoiding skin contact to prevent severe frostbite. Eye protection or a full-face shield is also recommended. Contain dry ice in a Styrofoam™ container (e.g., a disposable Styrofoam™ cooler).



So, should you bother trying it? I'd say it is certainly worth a try. And it certainly can't hurt. I plan on trying it myself ... especially with dry ice ... but don't know when that will be. If anyone out there has experienced success with freezing a stuck die, I'd certainly like to hear the details.

UPDATE: Just recently (01/26), I talked with a customer who stated that freezing the die overnight in his kitchen freezer before attempting case removal definitely helped in his case!

The Case is “Really” Stuck ... Now What?

It is possible to have a case that is so stuck that none of these tools can remove it. So, if a case is *really* stuck, don't panic! STOP before you strip the threads out of the case web, shear the rest of the rim off, or do anything else that will just make it more difficult to remove the case. At this point, it is probably time to throw up the white flag and surrender. Next, call the die manufacturer, ask if they have a stuck case removal service, and make arrangements to send the die back.

The Case is Unstuck ... What Next?

As mentioned earlier, I caution against simply resuming resizing brass without first cleaning, inspecting, and lubing the die. Removing the die from the press will facilitate that process ... especially the inspection part. After all, a full-length resize die is the least complicated die to set up ... on either a single-stage or progressive press ... so removing it from the press is no big deal.

Disassembly

Remove the die from the press (if it isn't already) and disassemble into component parts. That includes removing the expander bead and decap pin from the rod.



Cleaning

Thoroughly clean all the parts. If you happen to have an ultrasonic cleaner, by all means use it.



Inspection

Carefully inspect all the parts. Use a magnifying glass or jewelers loupe (10X or higher) and look for scratches, chips or brass residue in the die body and on the expander bead. Inspect the threaded parts of the Expander/Decap rod for thread damage and the rod itself to ensure it is not bent. Once reassembled, check that the decap pin is precisely centered in the mouth of the die.



Lubrication & Assembly

Lightly lubricate the parts before assembly. The same case lube you normally use will be fine ... assuming it is a quality high-pressure rated case lube. I prefer to use Redding's Imperial Sizing Die Wax as it is less messy than some other lubes. Use a foam swab to reach all areas inside the die.



TIP: Prelubricating the die is critical as it ensures that that every bit of the die surface is lubed and doesn't depend on the first resized case to carry lube into the die.

TIP: Using a foam swab (instead of a cotton swab) ensures that you won't accidentally leave behind any fuzz ... and it can be reused many times.

Discard The Unstuck Case!

Even if you use a stuck case remover kit that doesn't require the case web be drilled and tapped, it is a foregone conclusion that the case has been compromised. So just toss it in the brass recycling bin.

TIP: It is considered "best practice" to crimp the mouth of known bad cases shut using a pair of pliers to be 100% certain they can't accidentally get back into a batch of good brass (see photo at right).



How to Not Stick a Case in the First Place!

It is far better to prevent a stuck case than to remove one. Here are a few tips that can help.

- **Use a Specialty Case Lube:** Always use a lube designed specifically as a case lube. I don't recommend using "home brew" case lubes.
- **Clean New Dies:** The preservative oil that comes on new dies is not intended to be a case lube. Clean new dies thoroughly prior to using a good degreasing cleaner.
- **Prelubricate the Die:** After cleaning a die, apply case lube directly to the inside of the die. This will assure that even the first case sized is adequately lubed. All that is needed is a light coating.
TIP: I prefer using a foam swab as it will not leave lint like a cotton swab can. By using a swab it is also less likely that I'll apply too much lube.
- **No Dry Film Lubes!:** Never use graphite, moly, mica, PTFE, hBN, WS2 or any other dry lube in a full-length sizing die. These are adequate for case neck sizing only but are simply not up to the extreme pressures of full-length case sizing.
- **Always Clean Brass Before Sizing:** There is usually much more than just burnt powder residue and tarnish on brass cases. Any grime or grit on the brass can act as a wedge and promote case sticking. Also, grit from the ground can be highly abrasive and can damage dies ... even carbide dies.

TIP: Read UniqueTek Tips File #8: "Cartridge Case Lubrication" for more detailed information on case lubes.

Final Thoughts

As you can see, there are many options for Stuck Case Remover Kits, and they'll all get the job done ... including the DIY kits. But, regardless of which type kit you determine meets your needs and budget, the most important thing is to have one on your bench before you need it! But the kit isn't the only thing you need to plan ahead. You should also keep spare parts for your Expander/Decap assembly ... and perhaps even an entire spare assembly ... just in case any of those parts are damaged.

In This Revision:

- Added this section listing what changes were made in this revision.
- Updated MSRP of all products.
- Updated Trademark usage and citations.
- Corrected several typos and grammatical errors.
- Updated information regarding freezing the die before attempting case removal ... including calculating of just how much (or rather how little) the case diameter shrinks upon freezing at three different temperatures.
- Updated information regarding several die manufacturers I found who offer a stuck die removal service.
- Added several more photos and icons.
- Added reminder about discarding the case once it is unstuck.
- Moved the list of considerations when using a press-mounted remover kit from the end of that section to the beginning.

Acknowledgements:

- Special thanks for Lyman® for providing a sample of their Stuck Case Remover Kit and photos.
- Special thanks for Robin Sharpless at Redding Reloading for taking the time to talk with me at great length.

References:

1. Bolt Pull Force derived from multiple sources including the “Proof Load Tensile Strength” table on the Alma Bolt web site at: <https://www.almabolt.com/pages/catalog/bolts/proofloadtensile.htm>
2. Coefficient of Thermal Expansion calculations made using the online Thermal Expansion Calculator at: <https://www.omnicalculator.com/physics/thermal-expansion>

Photographs:

All photographs and drawings are courtesy of their respective manufacturers. Additional photos and custom icons are property of UniqueTek, Inc.

Trademarks:

Every effort has been made toward giving proper credit to manufacturer’s trademarks. If any were missed or incorrectly credited, it is strictly accidental.

- CoAx is a registered trademark of Forster Products.
- Forster is a registered trademark of Forster Products.
- FRANK N GONZ trademark ownership is unknown.
- Hornady is a registered trademark of Hornady Manufacturing.
- Lyman is a registered trademark of Lyman Products Corp.
- RCBS is a registered trademark of RCBS.
- Styrofoam is a trademark of DuPont de Nemours, Inc.
- VICE-GRIP is a registered trademark of Stanley Black & Decker

Product Prices:

All prices shown are MSRP as of 01/31/26 and may change at any time.

Disclaimer: UniqueTek, Inc. is not liable for damages or personal injury that may be incurred as a result of using the information contained in this document. Failure to follow manufacturer’s recommendations may void warranties and/or result in potentially hazardous situations. Never use reloading equipment for a purpose for which it was not designed. Never use reloading equipment that has been improperly maintained or operated. It is your responsibility to ensure that your reloading equipment is properly assembled, is maintained in proper working condition, and is used according to the manufacturer’s instructions and safe reloading practices.