

Click [HERE](#) to return to the Table of Contents



S A A M I<sup>®</sup>

SPORTING ARMS AND AMMUNITION MANUFACTURERS' INSTITUTE, INC.

Since 1926

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

**6.5 CREEDMOOR**

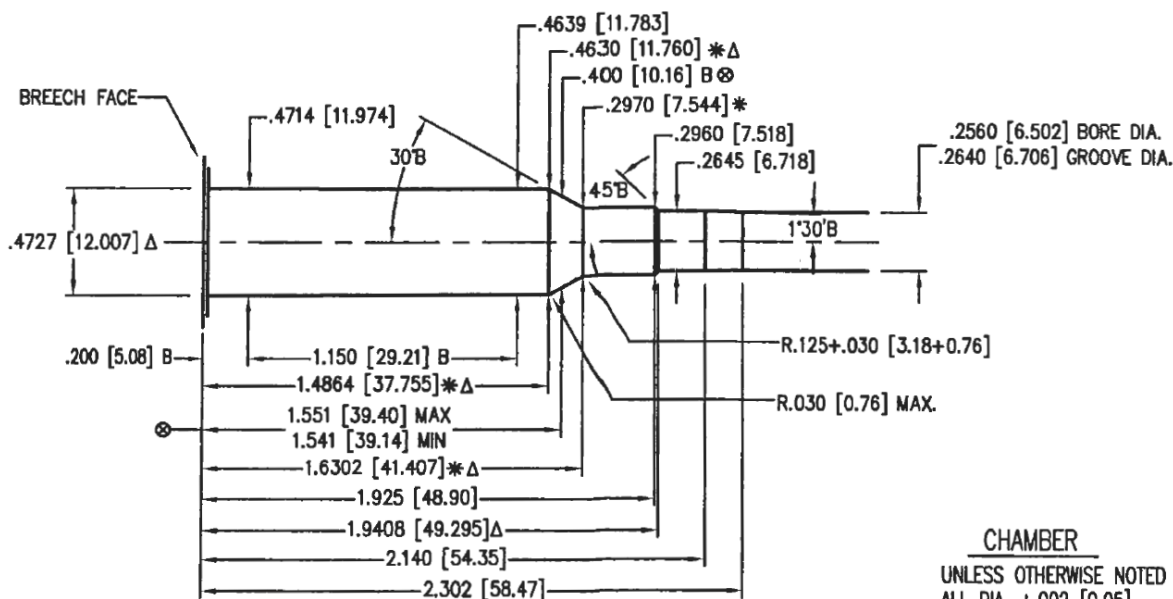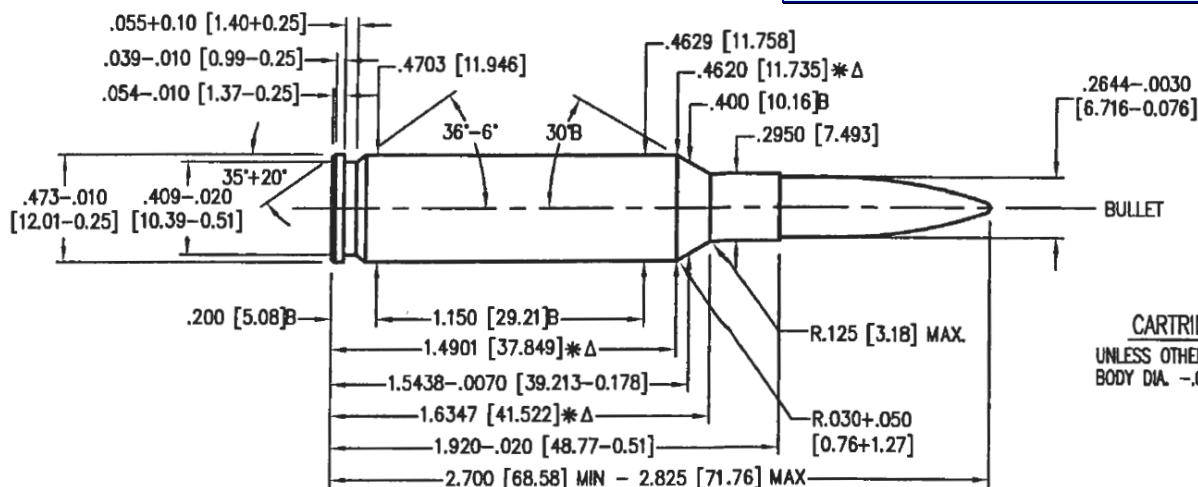

NOTE:  
 B=BASIC  
 [XX.XX]=MILLIMETERS  
 ⊗ = HEADSPACE DIMENSION  
 Δ = REFERENCE DIMENSION  
 \* DIMENSIONS ARE TO INTERSECTION OF LINES  
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

MIN. BORE & GROOVE AREA:  
 .0536 SQ. IN. [34.580 mm<sup>2</sup>]

OPTIONAL:  
 Δ 6 GROOVES  
 Δ .090+.002 [2.29+0.05] WIDE  
 TWIST: 8 [203] R.H.