
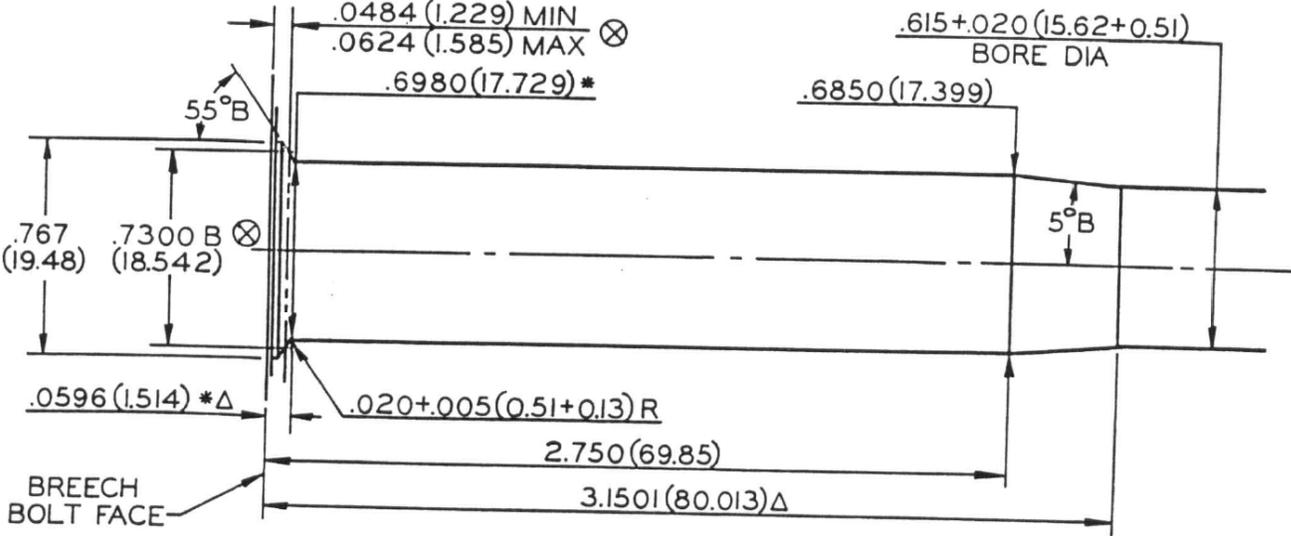


[Click HERE to return to the Table of Contents](#)

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

20-GAUGE - 2³/₄"

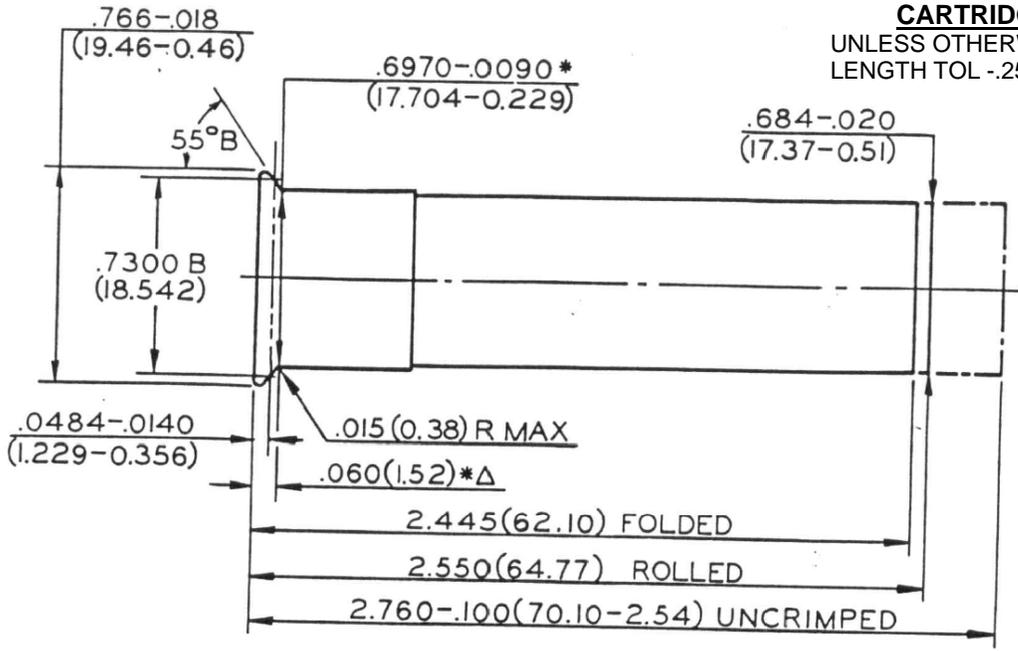

CHAMBER LENGTHS HAVE BEEN INCREASED. FORMER CHAMBER DIMENSIONS ARE ALSO CONSIDERED TO REPRESENT SAFE PRACTICE.

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA $+.005 (0.13)$
LENGTH TOL $+.050 (1.27)$

NOTE
 B=BASIC
 (XX.XX) = MILLIMETERS ⊗ = HEADSPACE DIMENSION
 * DIMENSIONS ARE TO INTERSECTION OF LINES Δ = REFERENCE DIMENSION
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)