


Australian manufacture ensures total control over performance for application
 The Proline downlight range has been developed to ensure infinite control when considering return on investment
 Quality OEM component selection provides a lighting solution tailored to the specific project brief





- Ultra low glare COB downlight module
- Phase dimming, Dali and Analogue protocol variants
- Standard CRI85+ - CRI90+ on request
- Injection moulded PMMA refractor combined with high purity specular insert
- Broad wattage spectrum utilising CREE LED engine 50,000h - TM21 Projections
- Remote converter - hard wire or flex & plug option
- VS Lighting Ceramic COB and converter option - GmbH 100,000h Package on request

MODEL	WATTS	CUT-OUT	COLOUR TEMPERATURE	*Lumens	OPTIC
PHA-05	05	85mm	3000K	720	15°
PHA-13	13	85mm	*4000K	1297	25°
PHA-23	23	118mm	5000K	1800	40°
PHA-30	30	118mm		2300	
PHA-40	40	118mm		3000	

Geometry

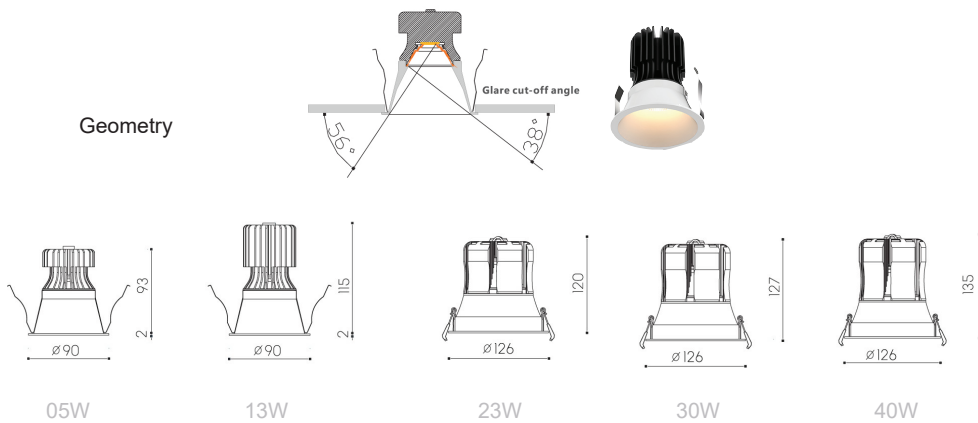

Remote converter

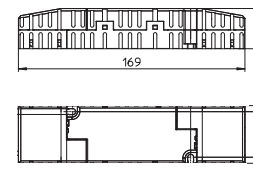

Reflector insert option

Distribution (cd)

