


Australian manufacture ensures total control over performance for application
 The Proline downlight range has been developed to ensure infinite control when considering return on investment
 Quality OEM component selection provides a lighting solution tailored to the specific project brief




- Ultra low glare COB downlight module
- Phase dimming, Dali and Analogue protocol variants
- Standard CRI85+ LED Higher rendering index on request
- Injection moulded PMMA refractor combined with high purity specular insert
- Broad wattage spectrum utilising Citizen LED engine 50,000h - TM21 Projections
- Remote converter - hard wire or flex & plug option
- VS Lighting Ceramic COB and converter option - GmbH 100,000h Package on request

MODEL	WATTS	CUT-OUT	COLOUR TEMPERATURE	*Lumens	LENS
PLD-10	10	100mm	3000K	1320	F-frost
PLD-15	15	125mm	*4000K	1832	
PLD-25	25	145mm	5000K	2725	
PLD-30	30	180mm		3270	
PLD-42	42	215mm		4688	

Geometry

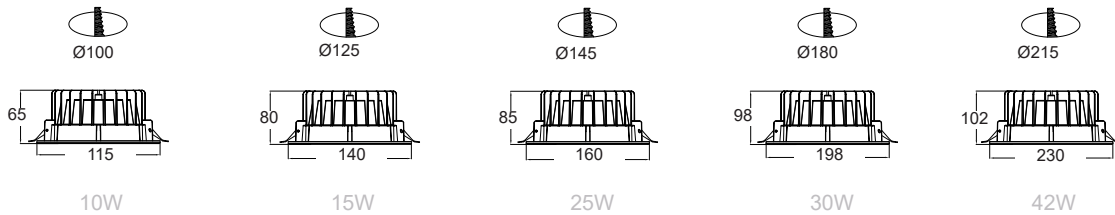

Remote converter

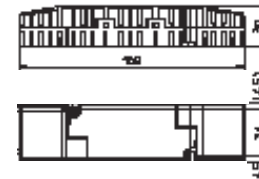

Distribution (cd)

