

Group in Catalogue : **INTERIOR**

Weatherproof SMD Downlight

220-240V
50/60 HzIK
06IP
54

TECHNICAL DATA

Mounting: in the ceiling, with mounting brackets (included)
 Body: aluminum
 Colour: white
 RAL: 9003
 Bezel colour / Detail: White/black/silver

ELECTRICAL DATA

Operating temperature range [°C]: -25 ... +40
 Power: 220-240V 50/60Hz
 Includes light source: yes
 Electrical connection: max 2x1,5 mm² wire

OPTICAL DATA

Light distribution: rotationally-symmetric
 Way of lighting: direct
 Reflector: polished faceted
 CRI/Ra: ≥80

GENERAL DATA

ULOR / DLOR: 0/100
 GENERAL DATA Lifetime (L80B10): 60 000 h
 Warranty: 5 years
 Application: public utility facilities, delicatessen, supermarkets,
 shopping centers, offices, car showrooms, pathways, halls,
 classrooms, corridors



Code	Beam Angle	Power	Luminaire Lumens [Lm]	Efficacy [Lum/W]	CCT	CRI
SPK.DLF09	90	09	900	100	2700	90
SPK.DLF15		15	1500		3000	
SPK.DLF20		20	2000		3500	
SPK.DLF30		30	3000		4000	
					5000	

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.spoke.net.au

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.


The parameters in the data sheet are given for Ta=25°C.

Colour temperature tolerance +/- 5%.

SPOKE Lighting reserves the right to introduce any construction changes and improvements into the lighting luminaires

Group in Catalogue : **INTERIOR**

Code	Dimensions (mm)	Hole Cut (mm)
SPK.DLF09	94(D) x 64(H)	80
SPK.DLF15	114 x 68	95
SPK.DLF20	140 x 74	120
SPK.DLF30	184 X 80	150

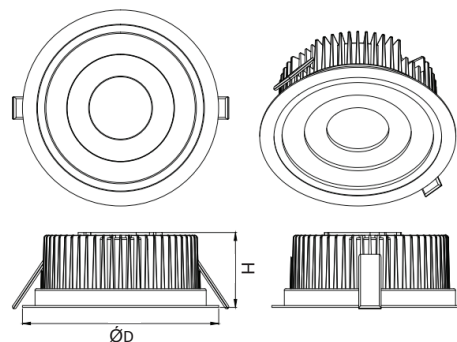

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.spoke.net.au

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Colour temperature tolerance +/- 5%.

SPOKE Lighting reserves the right to introduce any construction changes and improvements into the lighting luminaires