




ENDURE

- Performance optical high bay IP65
- Engineered LED optic delivers comfortable viewing angle
- Phase dimming, dali and analogue dimming options
- Standard CRI80+, 90+ CRI on request,
- Anodised reflector or acrylic refractor options
- Quality ~ 120-240V LED converter hard wire or flex-tail / flex&plug options
- Integrated junction box option

| MODEL | WATTS | OPTIC | COLOUR TEMPERATURE | Lumens | OPTION |
|-------|-------|---------------|--------------------|--------|-------------------|
| ENS | 80 | 60 / 90 / 120 | 3000K | 12000 | ANR - Reflector |
| | 100 | 60 / 90 / 120 | 4000K | 15000 | ACR - Refractor |
| | 120 | 60 / 90 / 120 | 5000K | 18000 | JB - Junction box |
| ENM | 150 | 60 / 90 / 120 | | 22500 | |
| | 200 | 60 / 90 / 120 | | 30000 | |
| | 250 | 60 / 90 / 120 | | 36000 | |
| ENL | 300 | 60 / 90 / 120 | | 42000 | |

Geometry

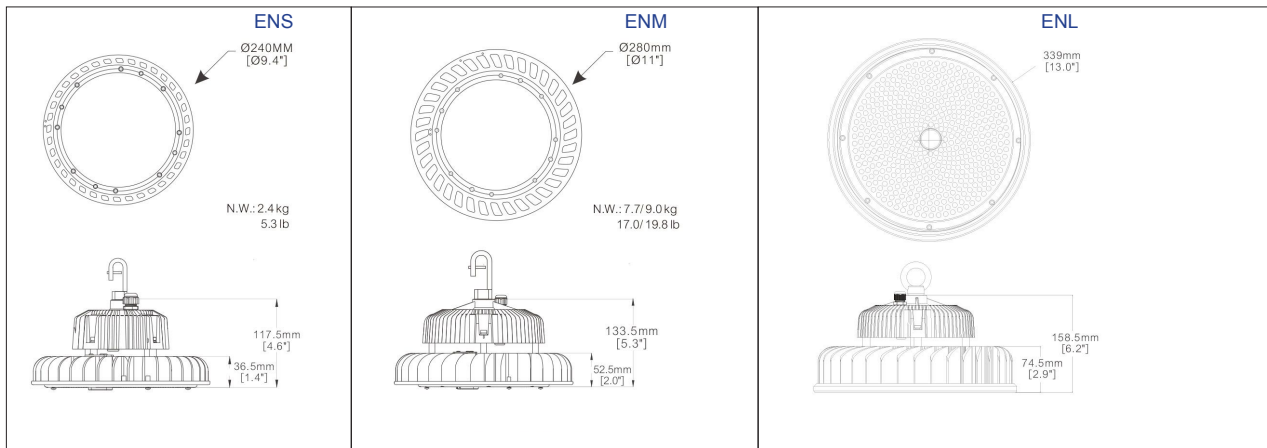

Candela plots

