




Snapline RS


- Crafted from anodised aluminium extrusion
- Designed for direct surface, wall and suspended fixations
- Integrated LED converter standard, Class II remote options for arduous environments
- Quality 24V LED array achieves pixel free diffusion, *up to 2000lm/m
- Direct clip fixation for surface mounting on request
- Vast array of modular optical inserts available

MODEL	LED	LENGTH	COLOUR TEMPERATURE	Lumens*	WATTS	
RS	24V - DC	1000mm	3000K	2000	22W	
	Zhaga - CC		4000K			
			5000K			
RS		2500mm	6000K	2500	55W	
RS		3000mm		6000	66W	

Geometry




LED Engine options

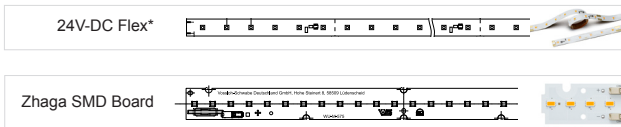



Photometric data

Light Intensity distribution




Candlepower Distribution

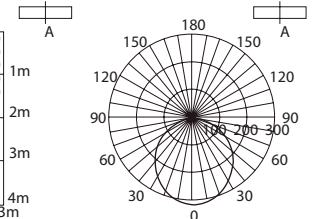


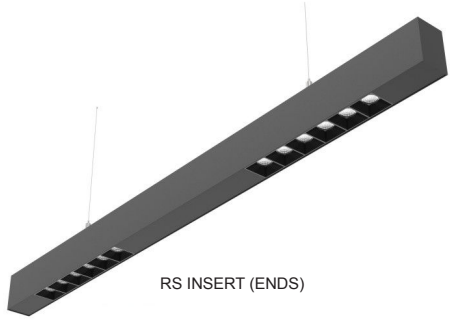


RS INSERT (ENDS)

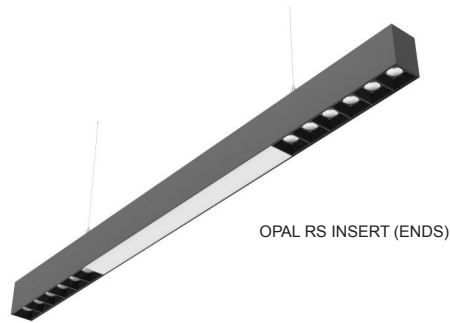


OPAL RS INSERT (ENDS)

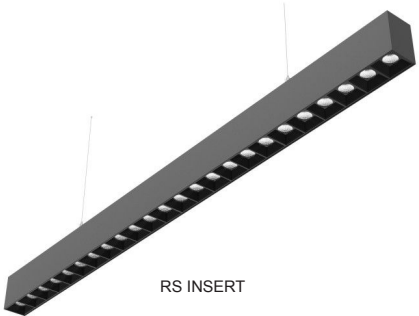


RS INSERT

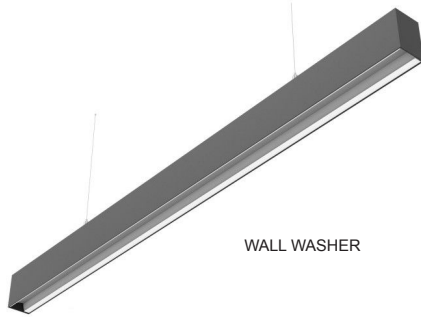

WALL WASHER

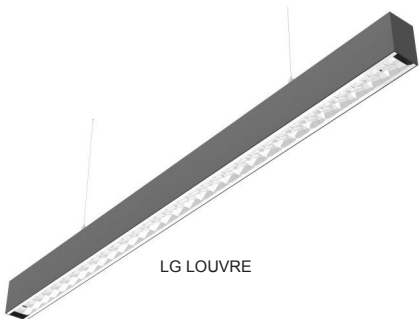

LG LOUVRE

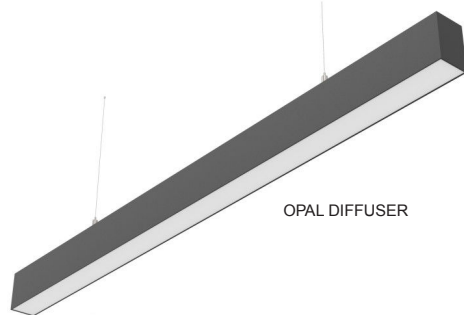

OPAL DIFFUSER




SCREWLESS ENDCAPS



INSERT CLIP



SURFACE MOUNT CLIP



ZHAGA LED MODULE




ELBOW 90 COUPLER



PRISMATIC CLEAR



SATIN DIFFUSER



BLANKING INSERT



SUSPENSION WIRE KIT



COUPLER STRAIGHT



15/30/45 Deg REFLECTOR



WALL WASHER



MIRO LOUVRE