

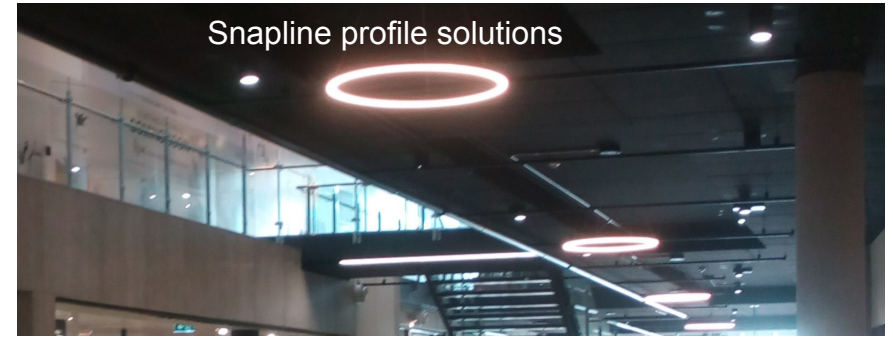


Page 1 - 3 > Snapline BETA Series set-builder guide bespoke radius segments
 Page 4 - > Snapline RING Series size guide

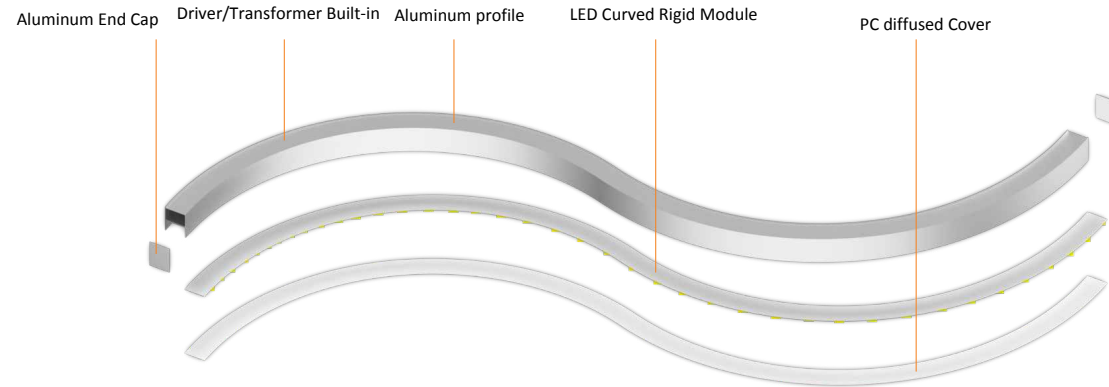


Snapline profile solutions


Product Structure:

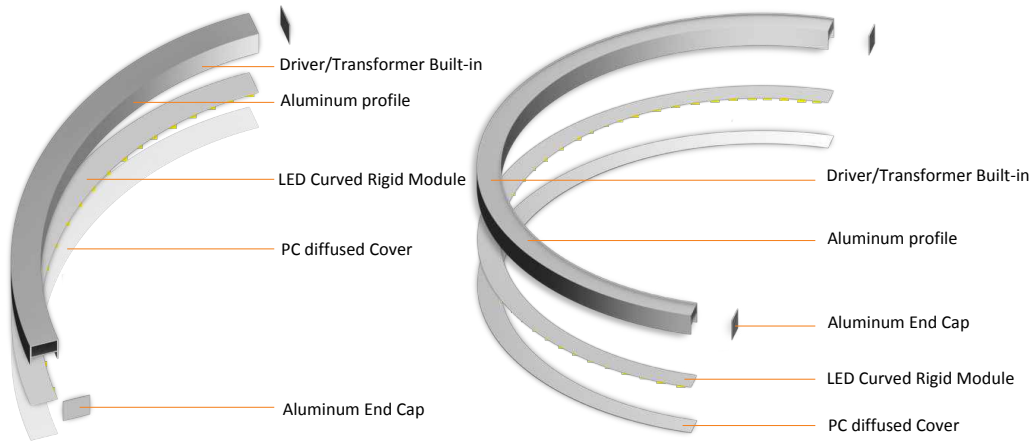

Custom-made product:



a /mm	r /m
40	0,3
50	0,5
60	0,6


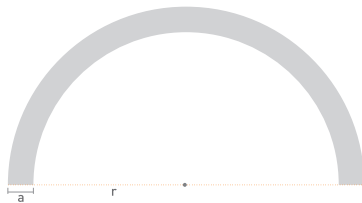


a /mm	r /m
40	0,3
50	0,5
60	0,6

Custom-made product:




a /mm	r /m
40	0,3
50	0,5
60	0,6

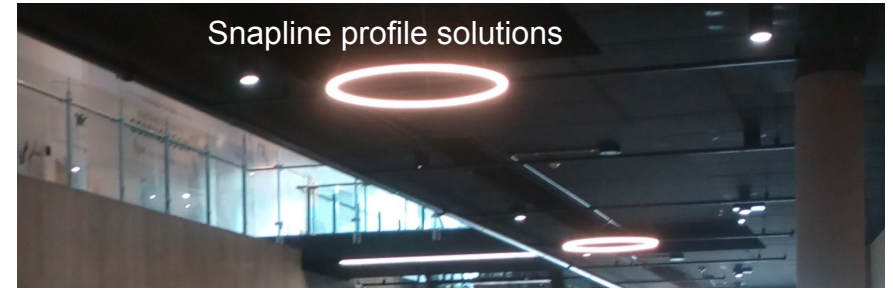




180degree + Straight




30degree + 60degree + 90degree



Below shapes could be custom-made

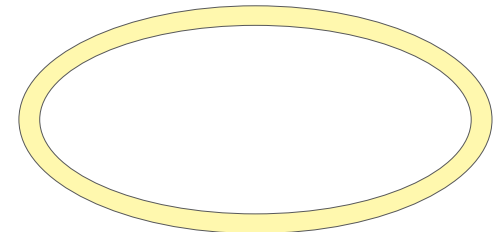
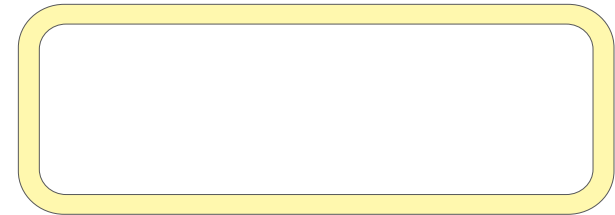
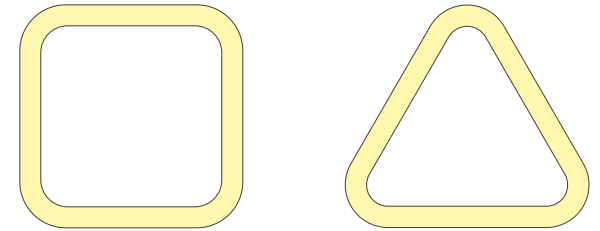


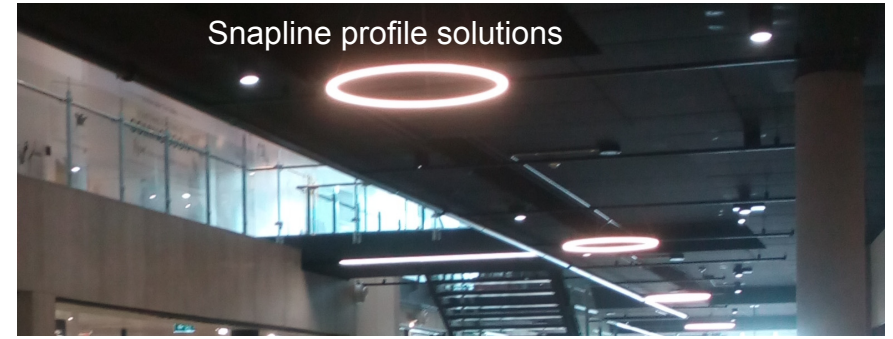

Snapline profile solutions

Creative application


Segment Guide

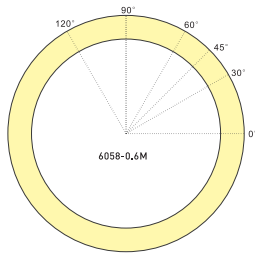


90degree + Straight




120degree + 120degree

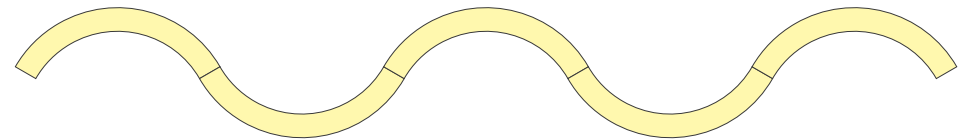

60degree + 90degree

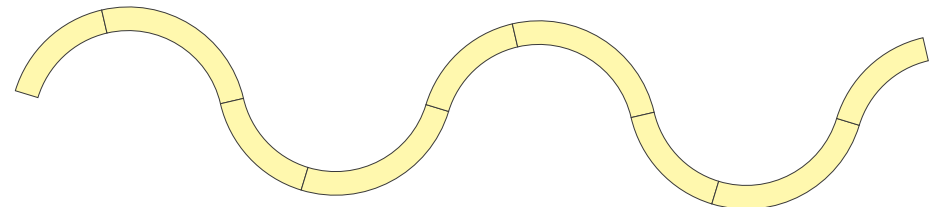



Snapline RING Series size guide

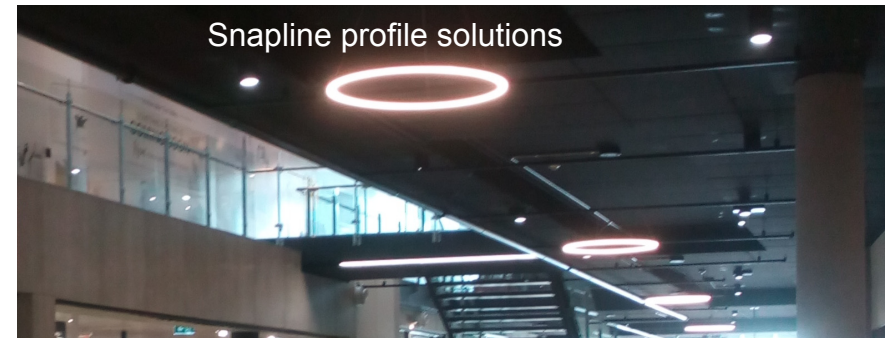



Snapline profile solutions





Diameter Ø/m	Power w	Brightness lm
0.6	19	1695
1.0	31	2826
1.2	38	3391
1.5	47	4239
2.0	63	5652
2.4	75	6782
3.0	94	8478
5.0	157	14130





Diameter Ø/m	Power(Up) w	Brightness(Up) lm	Power(Down) w	Brightness(Down) lm
0.6	9	850	19	1695
1.0	15	1413	31	2826
1.2	19	1695	38	3391
1.5	23	2119	47	4239
2.0	31	2826	63	5652
2.4	37	3391	75	6782
3.0	47	4239	94	8478
5.0	78	7065	157	14130





Diameter Ø/m	Power w	Brightness lm
0.6	28	2543
1.0	47	4239
1.2	57	5086
1.5	71	6358
2.0	94	8478
2.4	113	10173
3.0	141	12717
5.0	236	21195



Diameter Ø/m	Power(Up) w	Brightness(Up) lm	Power(Down) w	Brightness(Down) lm
0.6	14	1270	28	2543
1.0	23	2119	47	4239
1.2	28	2543	57	5086
1.5	35	3179	71	6358
2.0	47	4239	94	8478
2.4	56	5085	113	10173
3.0	70	6355	141	12717
5.0	118	10595	236	21195



Diameter Ø/m	Power w	Brightness lm
0.6	38	3391
1.0	63	5652
1.2	75	6782
1.5	94	8478
2.0	126	11304
2.4	151	13564
3.0	188	16956
5.0	314	28260



Diameter Ø/m	Power(Up) w	Brightness(Up) lm	Power(Down) w	Brightness(Down) lm
0.6	19	1695	38	3391
1.0	31	2826	63	5652
1.2	37	3391	75	6782
1.5	47	4239	94	8478
2.0	63	5652	126	11304
2.4	75	6782	151	13564
3.0	94	8478	188	16956
5.0	157	14130	314	28260

