



TECHTONIC




## TECHTONIC - STREET

- Performance optic area / street module
- Engineered LED optic delivers comfortable viewing angle
- Phase dimming, dali and analogue dimming options
- Standard CRI70, IK08, IP66
- 40-60mm pole spigot entry, Tilt adjustment to 10 degrees
- Quality ~ 120-240V Philips LED converter hard wire or flex-tail options
- Class I and Class II 12 or 24 V DC options


MODEL	WATTS	OPTIC	COLOUR TEMPERATURE	Lumens	NEMA / CONTROL
TST-S	60	TYPE I	4000K	8700	N3
	90	TYPE II	5000K	13050	N5
	120	TYPE III		17400	N7
TST-M	150	TYPE IV		21750	PE - CELL
	180	TYPE V		26100	
	210			30450	
	235			34075	

### Geometry

### TST-S

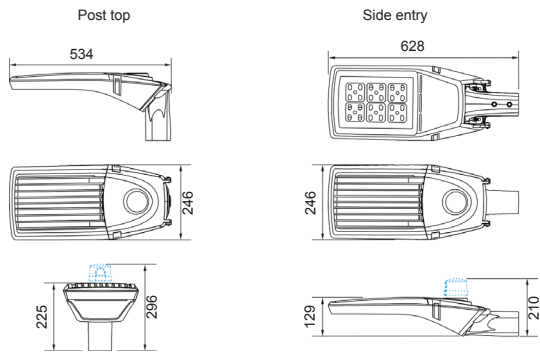

### TST-M

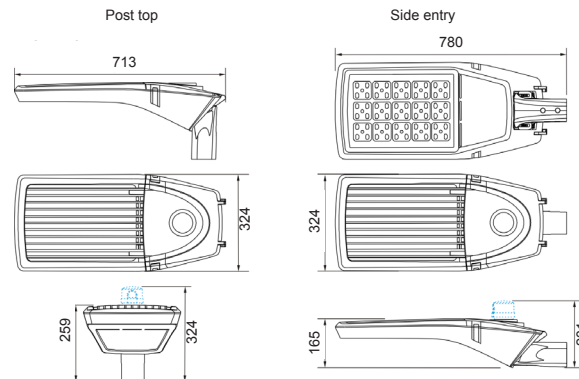

### Candela plots

