

Integral - termination bulkhead

Multiple cable entry / through wiring options


- Max (32 Pieces - 60W 3-core 1.5mm conductor)
- Max (48 Pieces - 60W 3-core 2.5mm conductor)

VAPOR

- Performance industrial vapor proof linear - IP65
- Engineered LED optic delivers comfortable diffuse light. Deglaring option - CD
- Fast-fit installation and wiring facility
- Photocontrol and sensor options
- Standard CRI80+
- Tough polycarbonate encapsulation, 316 Stainless steel screws
- 200-240V AC LED converter hard wire or flex-tail / flex&plug option

MODEL	WATTS	OPTIC	COLOUR TEMPERATURE	Lumens	Length
VA20	20	120 / CD	3000K	2397	623
VA40	40	120 / CD	4000K	4795	1223
VA50	50	120 / CD	5000K	6258	1523
VA60	60	120 / CD		7441	1523

Geometry

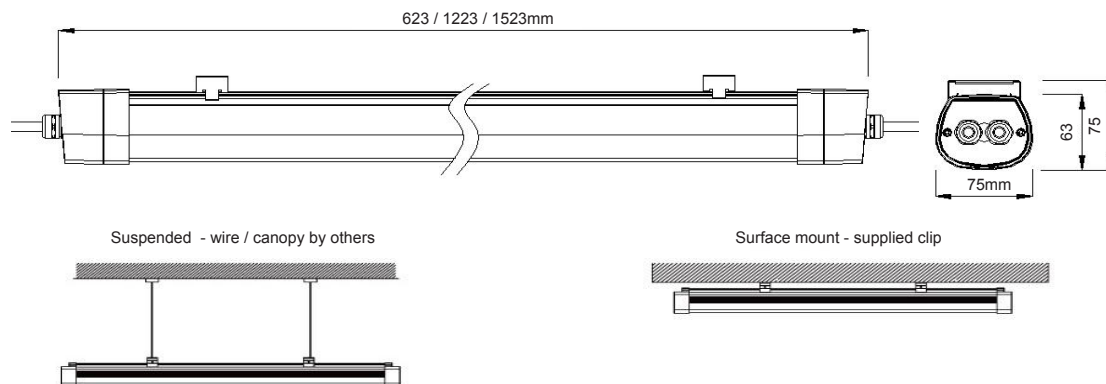

UGR<19 Conical deglaring insert - CD + clear lens

Candela plots

