




Wooden Flooring



Aqua



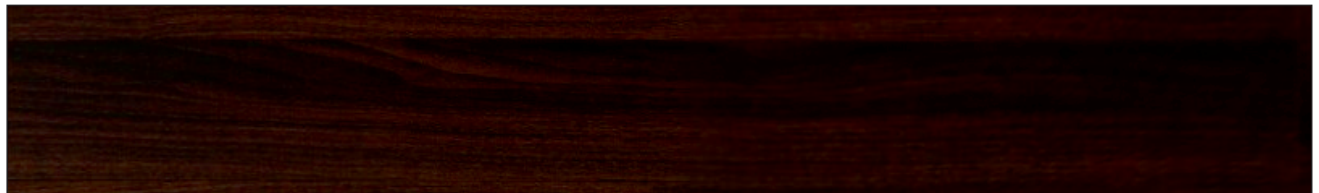


5001

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm



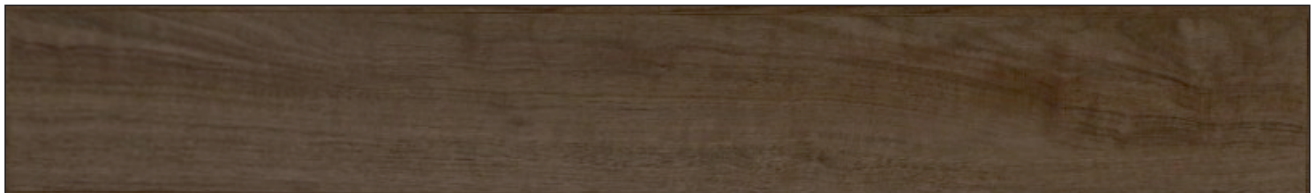


5002

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm



Solutia®

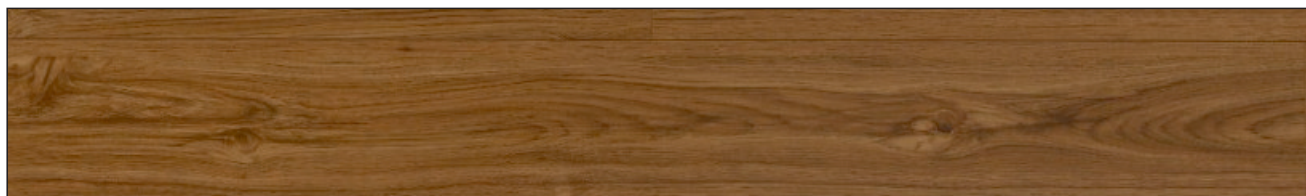


5003

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm



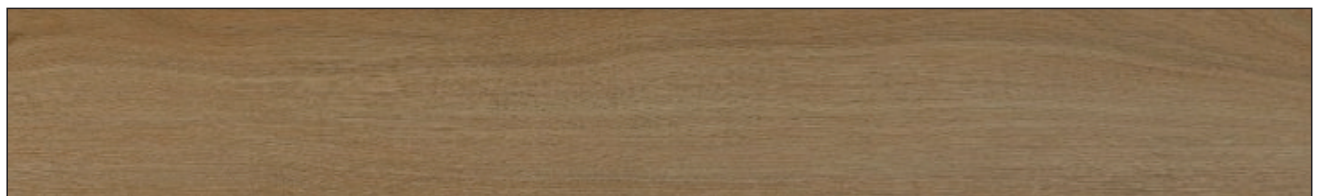

5004

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm






5005

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm



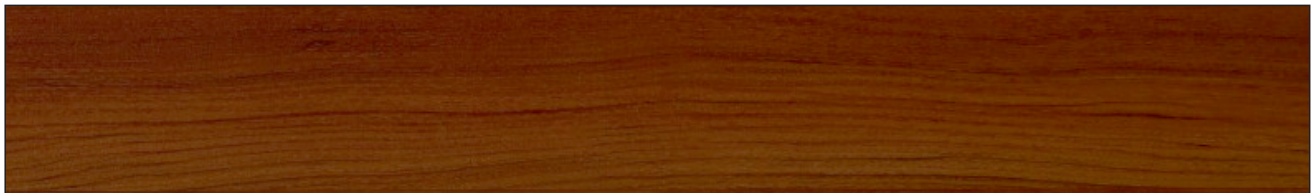


5006

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm



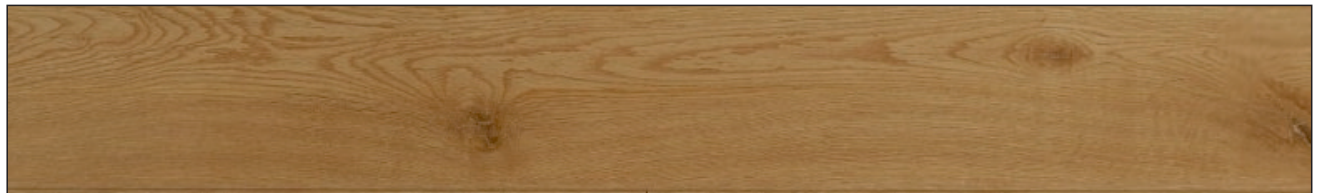


5007

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm



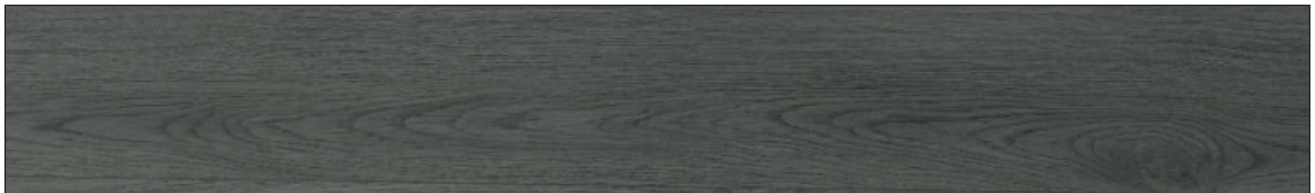

5008

12 Pcs / 25.89 Sq. Ft.

1215 mm x 165 mm X 5 mm





TECHNICAL SPECIFICATION

Top Surface	Melamine Impregnated Decorative Film protected by Aluminum Oxide Abrasive Overlay.
Core Material	Black Core H.D.F. (High Density Fiberboard) with an Average Density >1050 kg/m ³
Bottom Surface	Balancing Film for Dimensional Stability
Thickness	5 mm
Length x Width	1215 mm x 165 mm
Click Type	Unilin with Painted V- Groove
Installation Method	Interlocking Click System (Glue less installation)
Warranty	7 Year Heavy Domestic 3 Year General commercial Use
Box Packing	12 Pcs / 25.89 Sq. ft.
Fit for Use Grading	AC 4/32 - EN 13329 Compliance 
Features	     

TECHNICAL DATA

TEST	STANDARD	CHARACTERISTICS
Behaviour to Abrasion	EN 13329	IP 4000 Resolutions
Porosity	Graphite Test 1	Grade 1 (Pore- Free)
Resistant to glowing cigarette ash	EN 13329	Degree 5: No Visible Changes
Fire Classification	DIN 4102	Flame Retardant-B1
Ignibility	DIN 51960	Does Not Ignite Easily
Indentation Test	EN 13329	Residual Indentation 0.0 MM
Chair Castor Test	EN 13329	No Negative changes when using Soft wheels castor
Simulated Pushing of Furniture Leg.	EN 13329	No Visible Damage
Thickness Swelling Test	EN 13329	< 5% Swelling (Waterproof)

Channal Partner's



Mumbai



Maharashtra




Delhi



Kerala



Tamilnadu



Andhra & Telangana



Madhya Pradesh



Karnataka



Kolkata



Gujarat



Chandigarh