

Criss Cross
CARPET TILES

THAILAND
TRUSTED QUALITY

NOVA



81

Box Size: 53.80 sq ft

Tile Size: 500 mm x 500 mm

NOVA



82

Box Size: 53.80 sq ft

Tile Size: 500 mm x 500 mm

NOVA




83

Box Size: 53.80 sq ft

Tile Size: 500 mm x 500 mm


NOVA

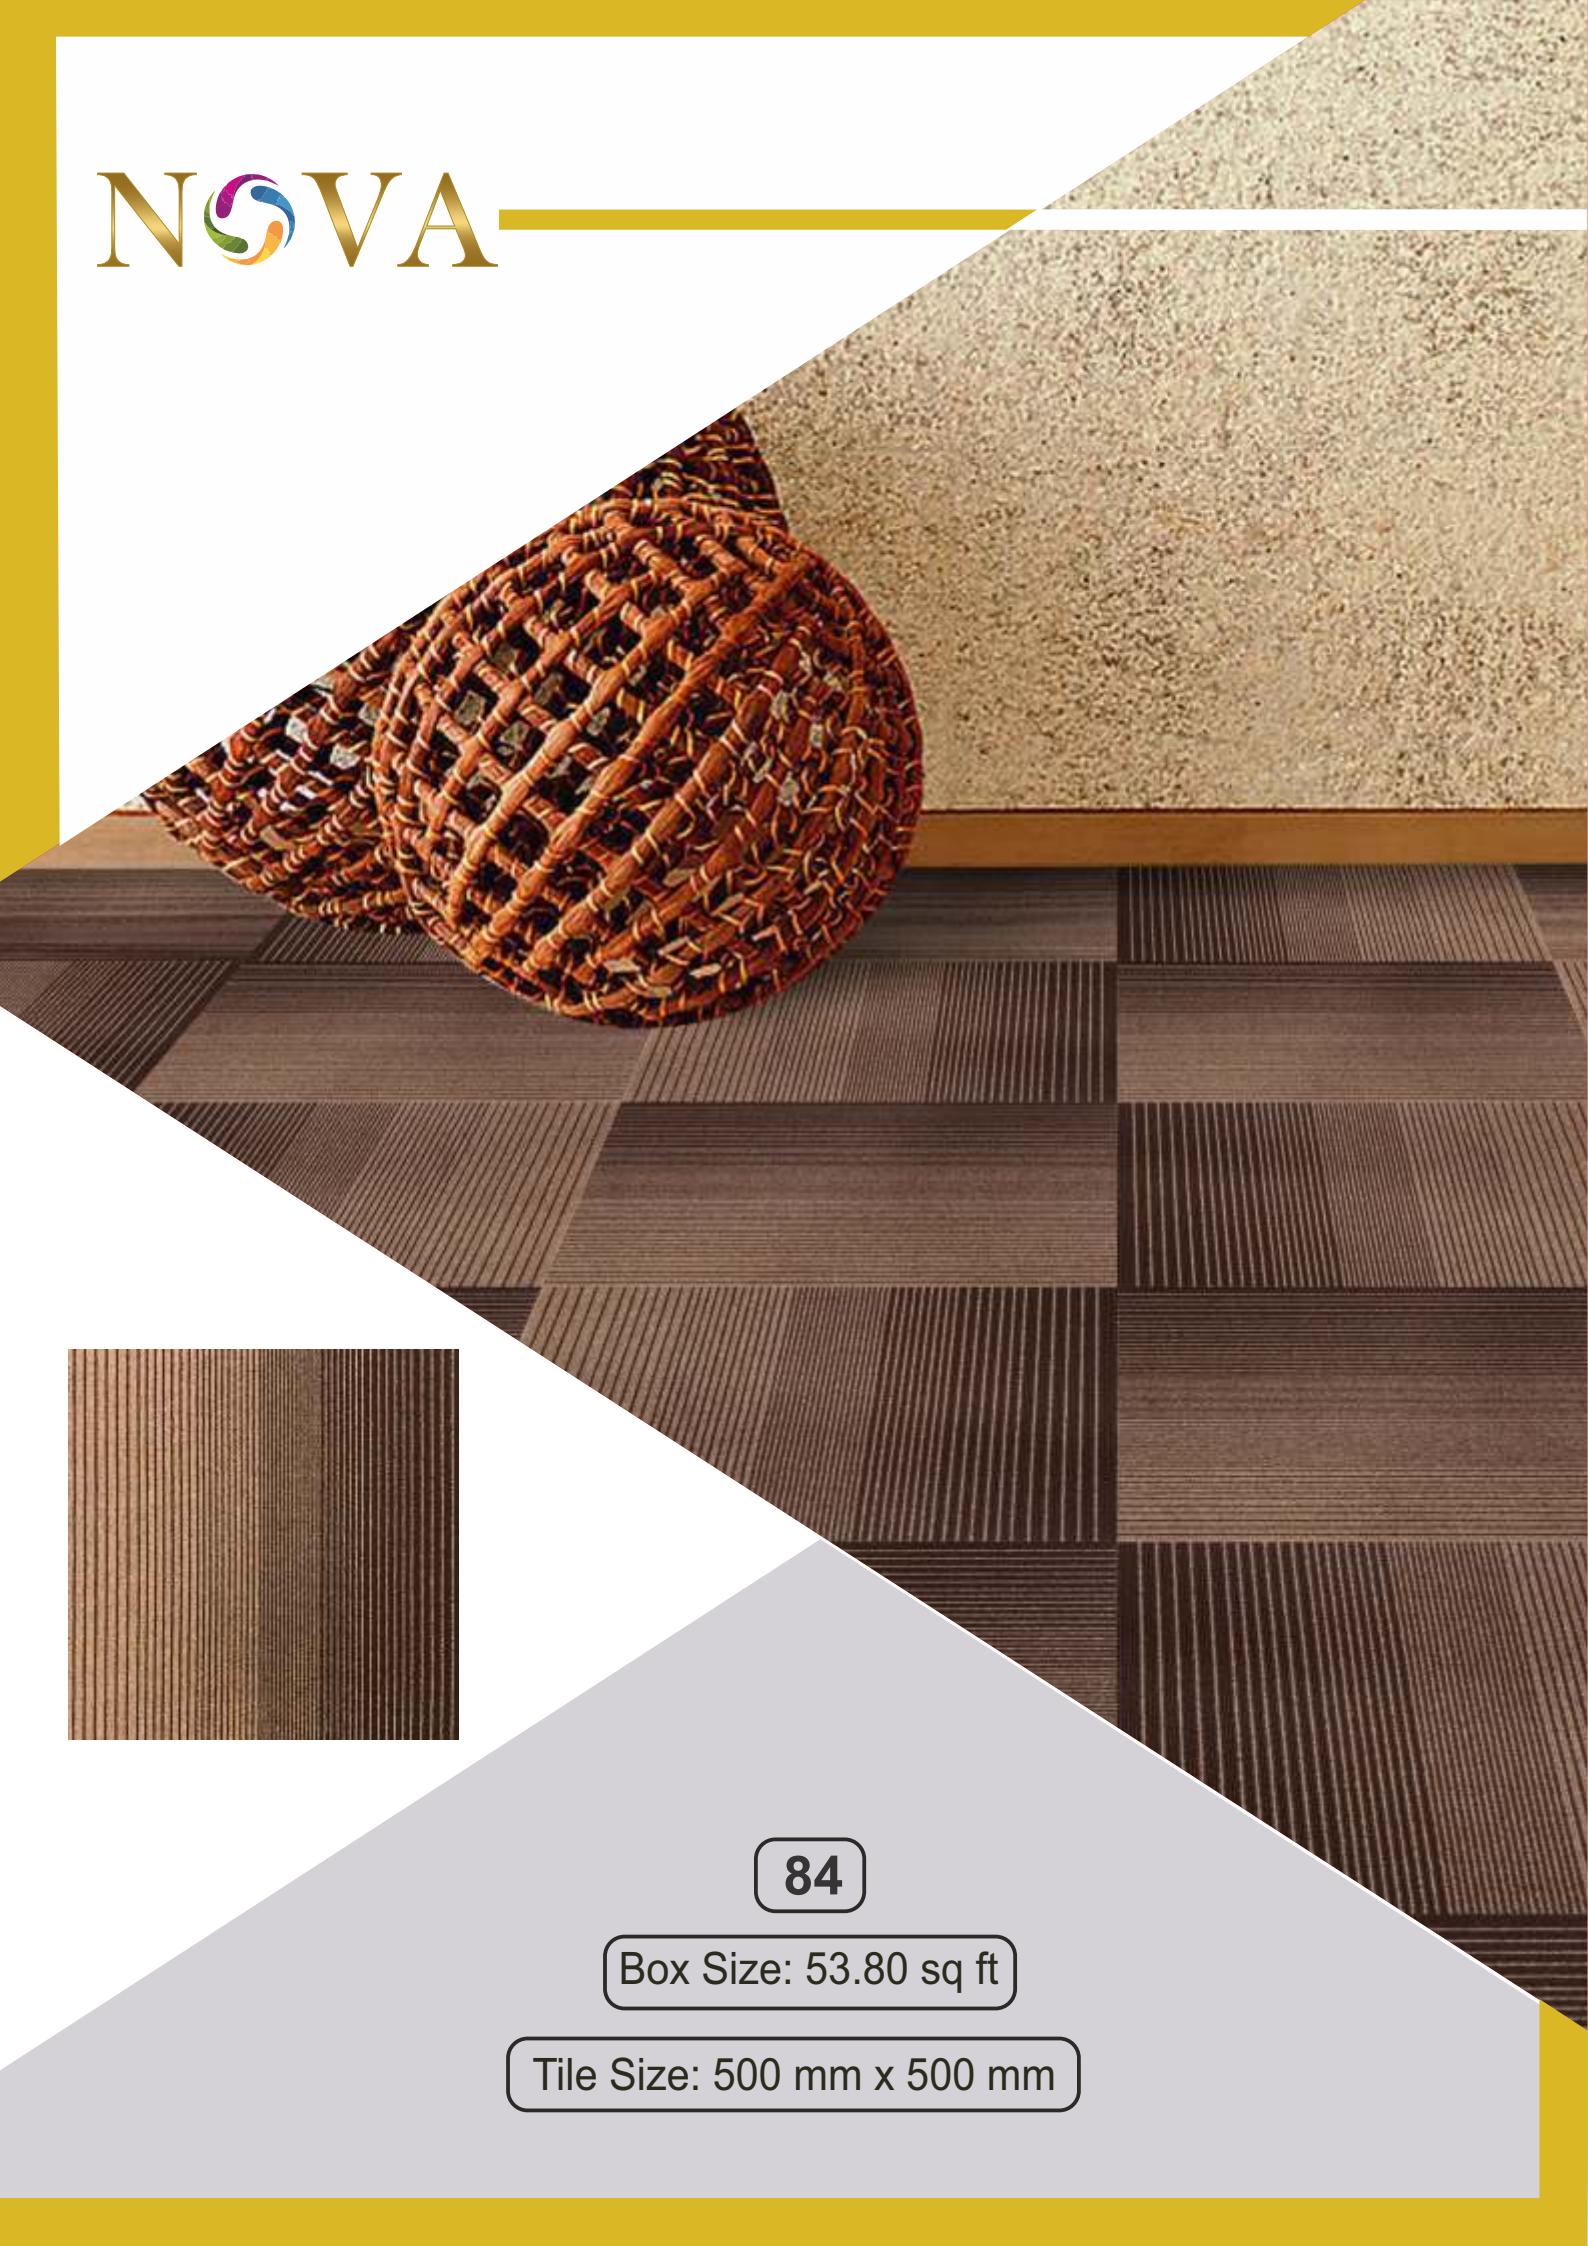

84

Box Size: 53.80 sq ft

Tile Size: 500 mm x 500 mm

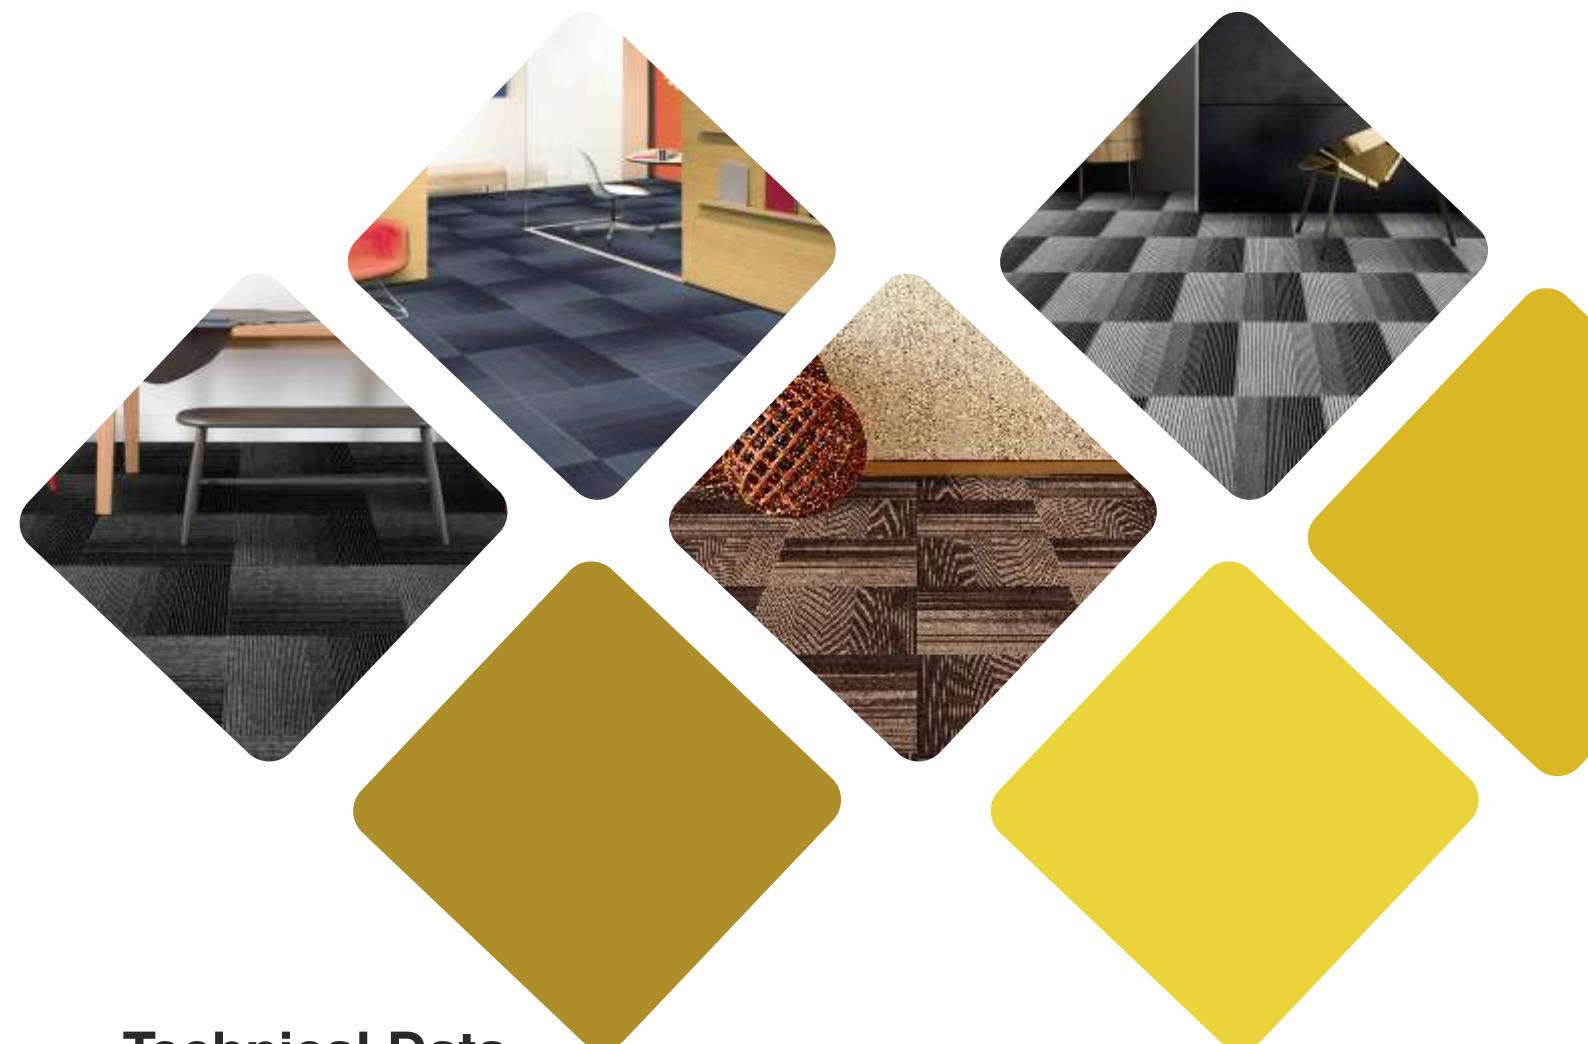

Technical Data

| | | | | | | | | | | | | | | |
|---|---|---|---|--------------|--------|-----------------|---|---|---|---|---|---|---|--|
| Tile Size | 500 mm X 500 mm |   Installation Methods <table border="1" data-bbox="1135 1358 1453 1560"> <tr> <td>Monolithic</td> <td>Quarter Turn</td> <td>Ashlar</td> <td>Non Directional</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </table> <p>Carpet tiles allow you to be more creative in design than regular broadloom carpeting. They also significantly reduce installation and replacement waste. Easy to place, easy to replace: carpet tiles provide a durable flooring solution.</p> <ul style="list-style-type: none"> • Minimum cutting loss • Phased installation possible <p>A good vacuuming program is necessary to retaining the beauty of your carpet tile</p> | Monolithic | Quarter Turn | Ashlar | Non Directional |  |  |  |  |  |  |  | |
| Monolithic | Quarter Turn | Ashlar | Non Directional | | | | | | | | | | | |
|  |  |  |  | | | | | | | | | | | |
|  |  |  | | | | | | | | | | | | |
| Total Thickness | 7mm | | | | | | | | | | | | | |
| Pile Height | 5mm | | | | | | | | | | | | | |
| Pile Weight | 600 g/m ² | | | | | | | | | | | | | |
| Total Weight | 3500 g/m ² | | | | | | | | | | | | | |
| Gauge | 5/51 | | | | | | | | | | | | | |
| Construction | Level Loop | | | | | | | | | | | | | |
| Yarn | 100% Polyolefin | | | | | | | | | | | | | |
| Colour System | Solution Dyed | | | | | | | | | | | | | |
| Backing Structure | Non-Woven with Eco Back | | | | | | | | | | | | | |
| Smoke Density | Passes (ASMT E662: GB/T 8627-1999) | | | | | | | | | | | | | |
| Fire Class | Passes (ASMT E648: GB 8624-2006) | | | | | | | | | | | | | |
| Static Propensity | <3.0 KV (AATCC-134:GB/T.18044-2000) | | | | | | | | | | | | | |

NOVA
DECOR SOLUTIONS

www.novadecorindia.com