



Sports Flooring



FRISKY - Plains & Woods

FRISKY




OAK WOOD



GREY



YELLOW

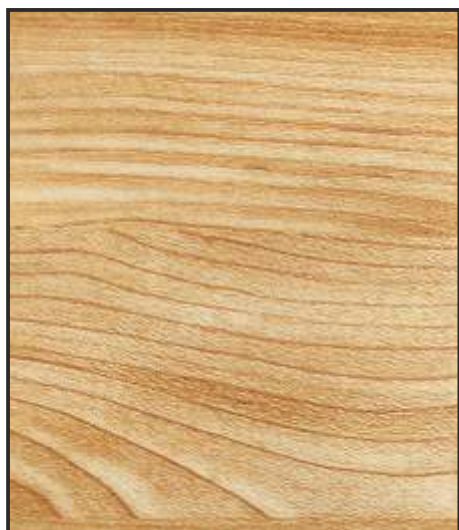

MAPLE WOOD



GREEN



ORANGE




WENGE



BLUE



RED


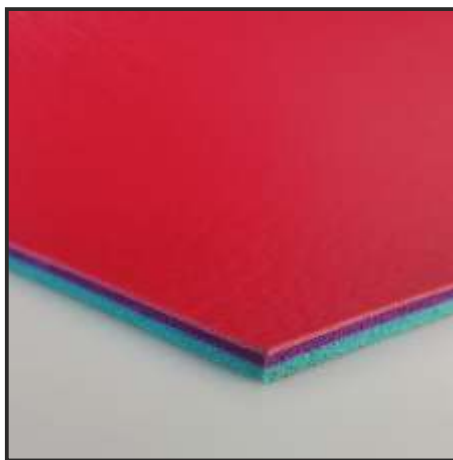


PLAINS

FRISKY

RED

Roll Size - 4.5mm X 1.80mtr X 15mtr

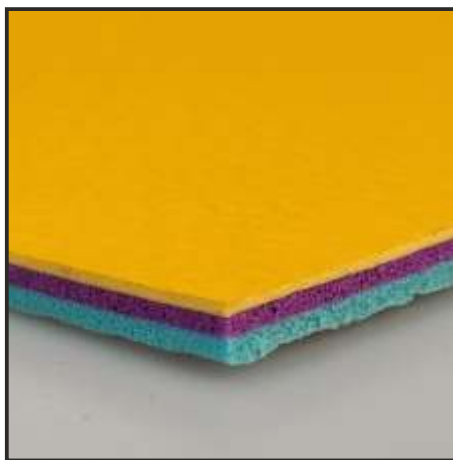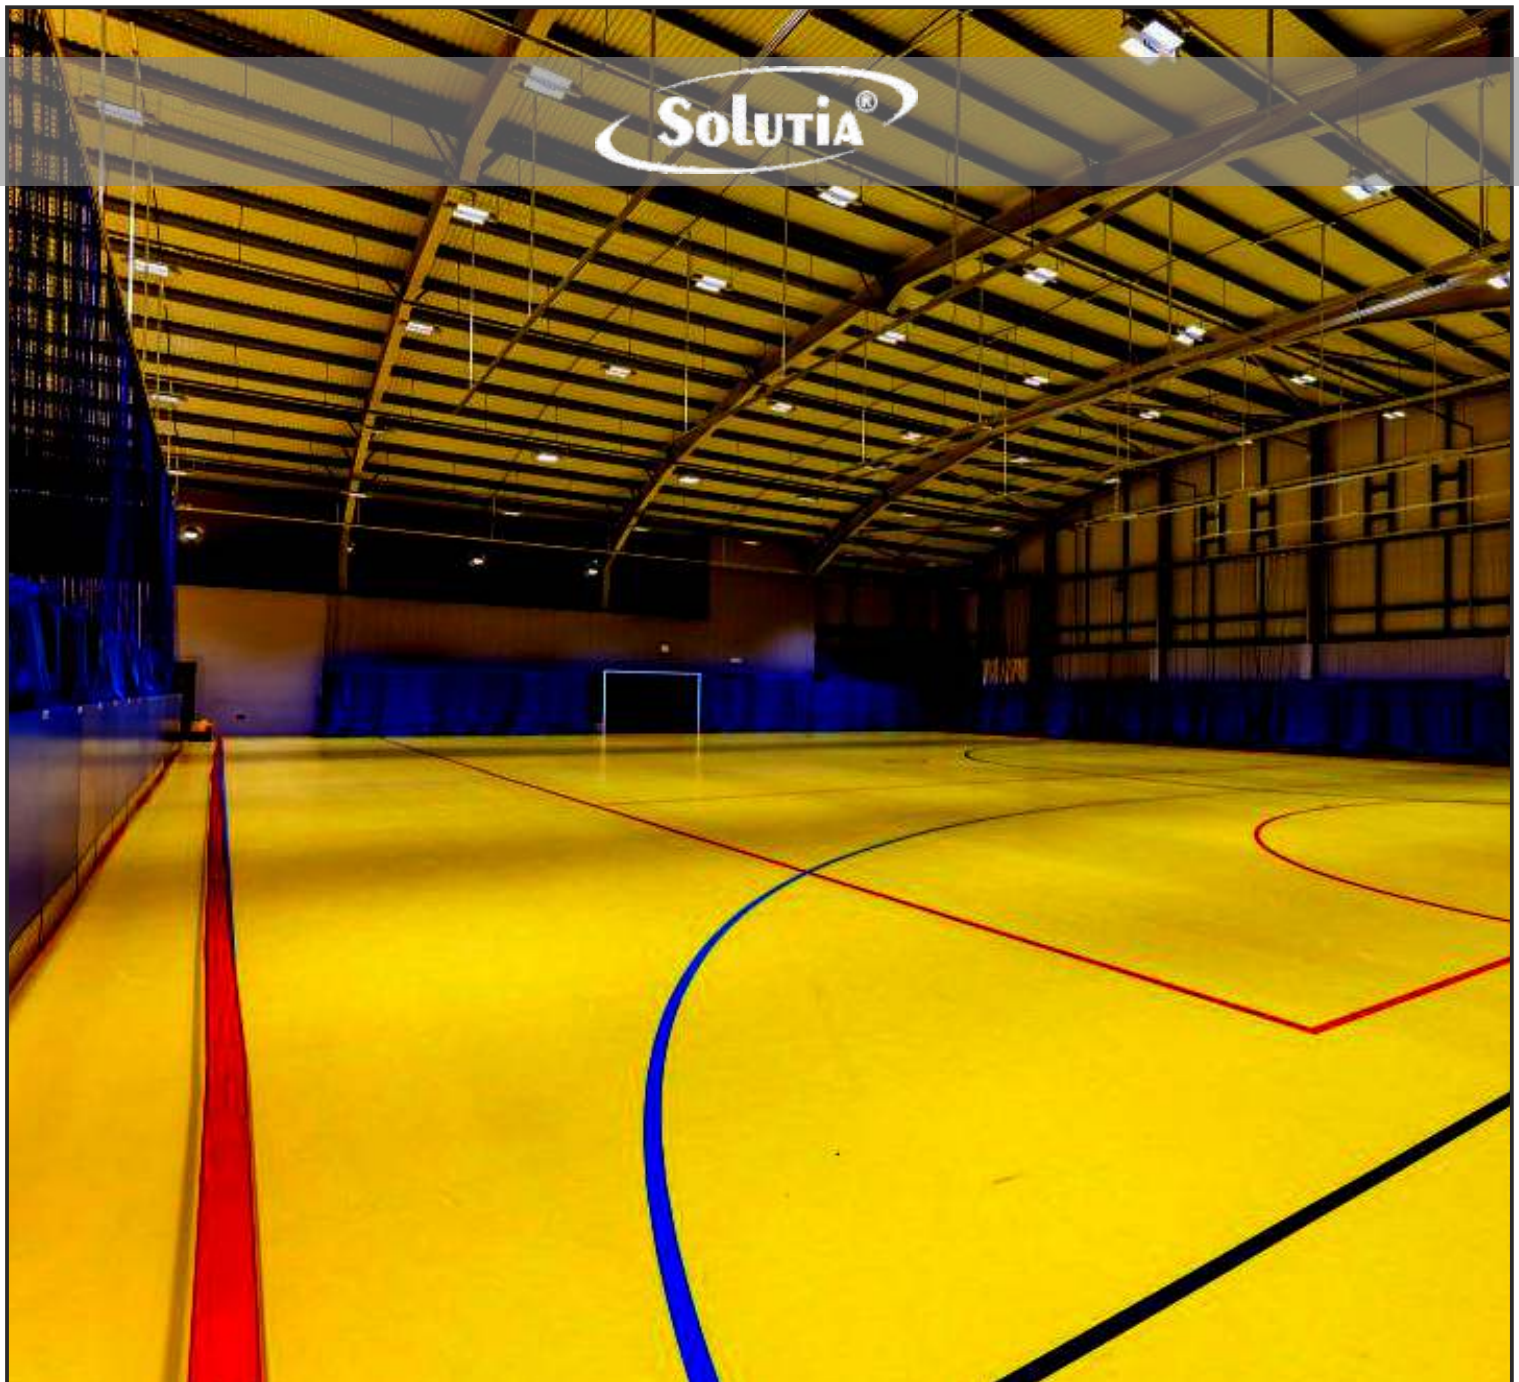


PLAINS

FRISKY

YELLOW

Roll Size - 4.5mm X 1.80mtr X 15mtr


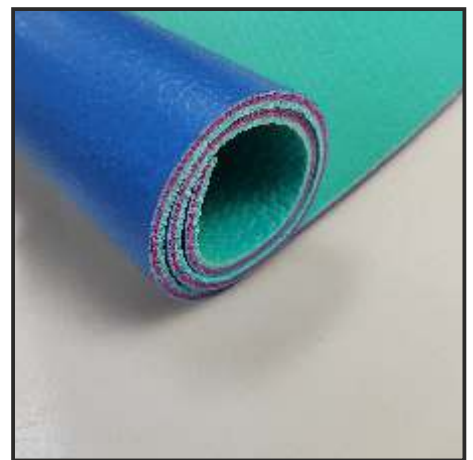


PLAINS

FRISKY

BLUE

Roll Size - 4.5mm X 1.80mtr X 15mtr

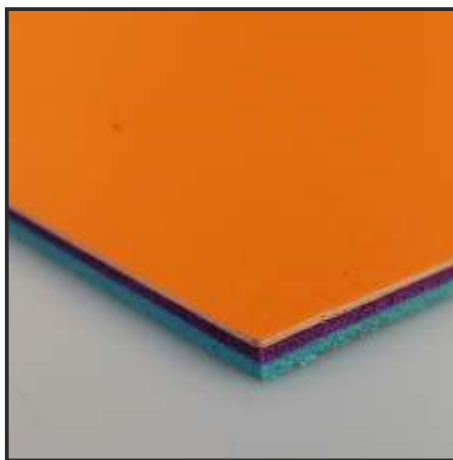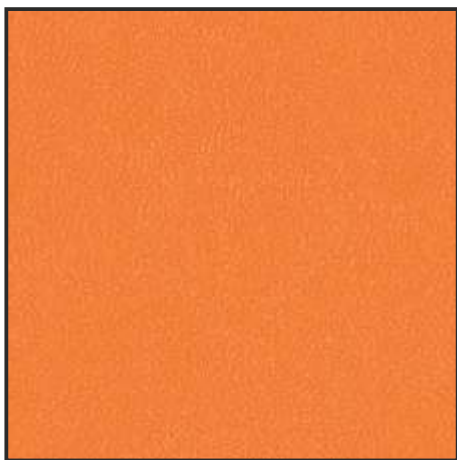


PLAINS

FRISKY

ORANGE

Roll Size - 4.5mm X 1.80mtr X 15mtr

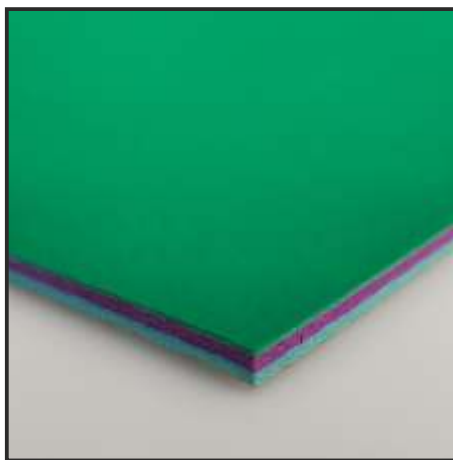

PLAINS


FRISKY

GREEN

Roll Size - 4.5mm X 1.80mtr X 15mtr



PLAINS

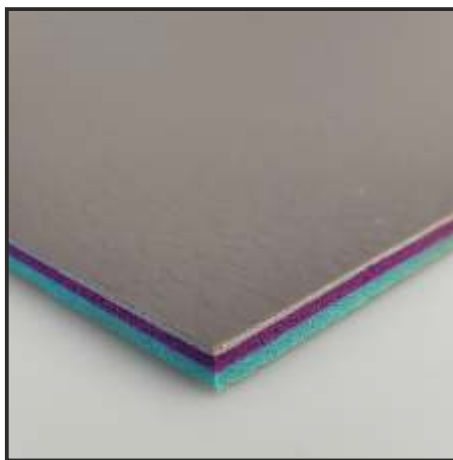

FRISKY

Roll Size - 4.5mm X 1.80mtr X 15mtr



GREY





WOODS

FRISKY

MAPLE WOOD

Roll Size - 4.5mm X 1.80mtr X 15mtr


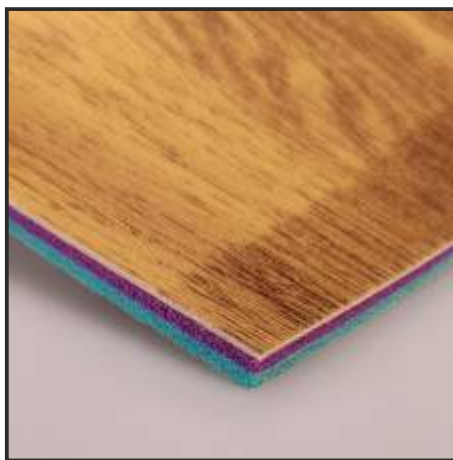
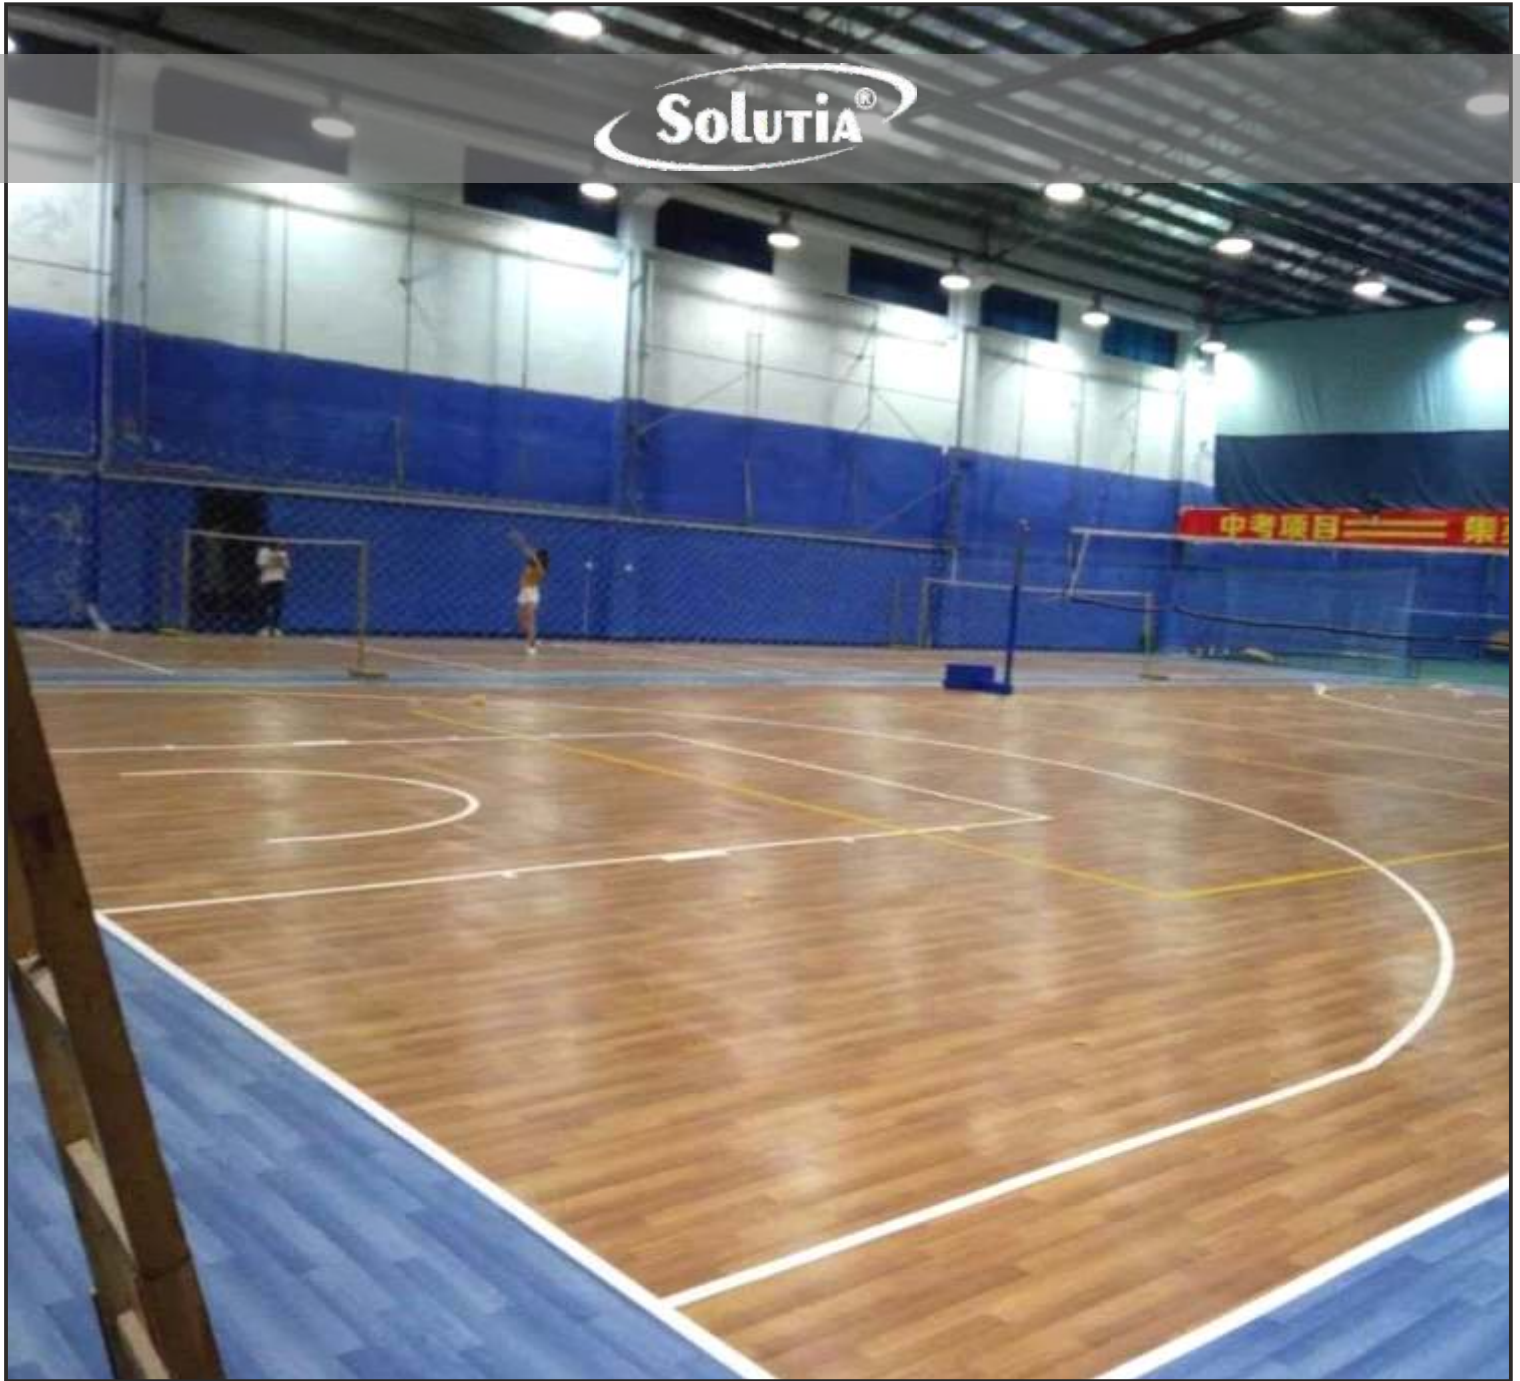


WOODS

FRISKY

OAK WOOD

Roll Size - 4.5mm X 1.80mtr X 15mtr

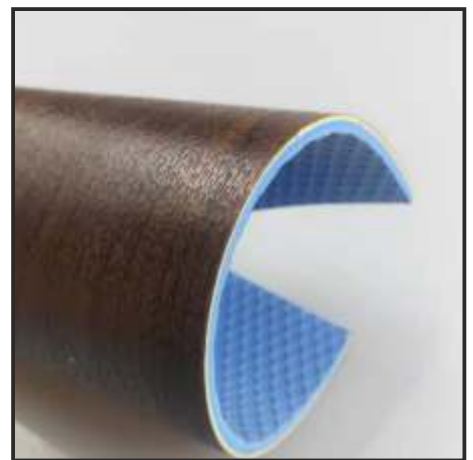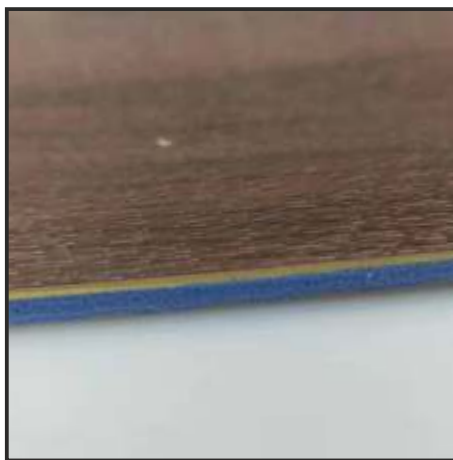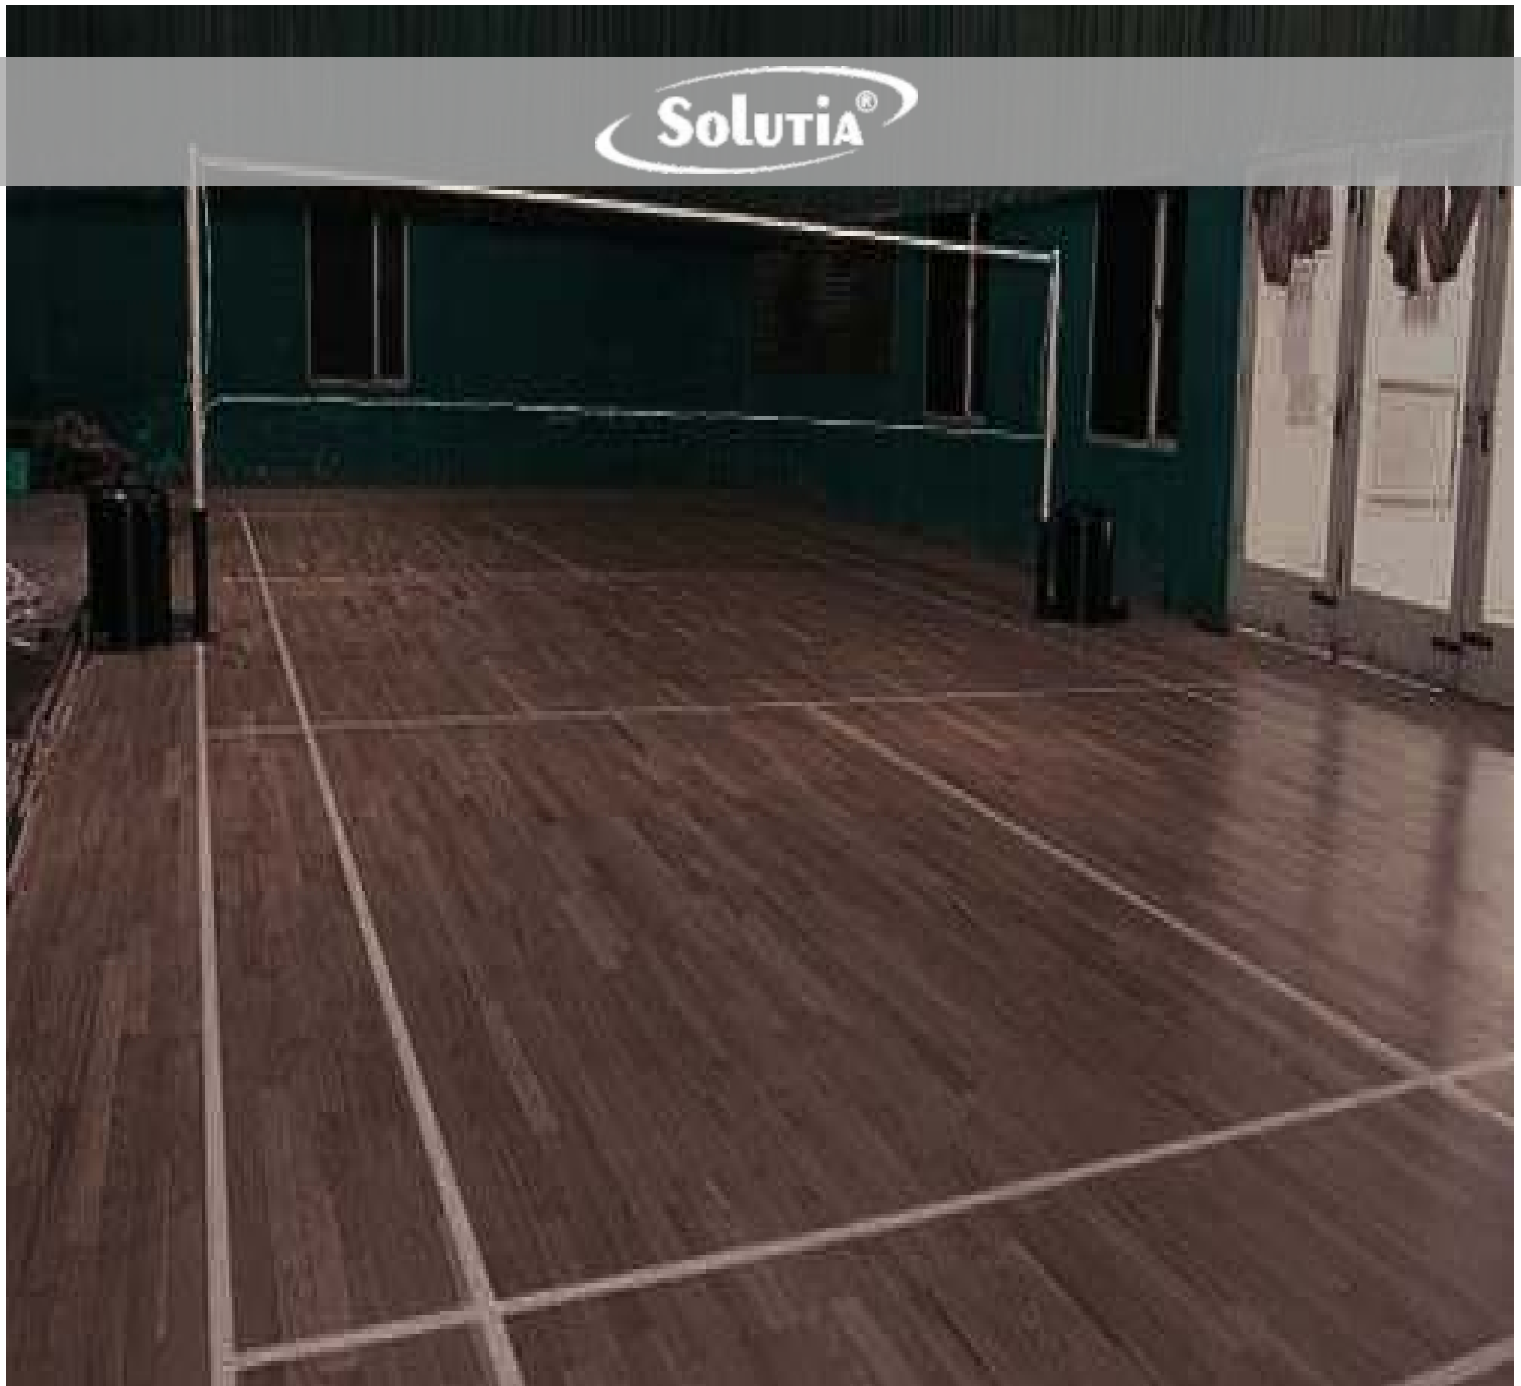

WOODS

FRISKY

WENGE

Roll Size - 4.5mm X 1.80mtr X 15mtr



TECHNICAL DATA

Description	Test Method	Unit	Text Results
Roll Length	EN426	M	15
Roll Width	EN426	M	1.8
Total Thickness	EN428	mm	4.5mm
Wear Layer Thickness	EN429	mm	1.0mm
Weight	EN430	Kg/m ²	3kg/m ²
Test Items	Text Method	Standard	Result
Impact Resistance	DIN18032	N/M	≥8
Abrasion Resistance	mm	≤10	7
Indentation Resistance	EN1516	mm	≤0.6
Sound Insulation	ENISO717-2	dB	20-30
Rebound Coefficient	GB/T 14883-1933	≥0.85	0.86
Test Items	Unit	Standard	Result
Rebound Values	%	≥5	24
Tensile Strength	Mpa	≥1.0	3.0
Elongation At Break	%	≥120	151
Flame Retardant	Grade	1	1
Friction Coefficient	--	0.40-60	0.57
Test Items	Text Method	Standard	Result
Volatile Content	g/m ²	≤75	24
Vinyl Chloride Monomer	Mg/kg	≤5	Not Detected
Soluble Pb Limit (Lead)	Mg/m ²	≤20	0.45
Soluble Cb Limit(Carbon)	Mg/m ²	≤20	0.05
Test Items	Text Method	Standard	Results
Flame Height FS mm	GB/T 8626-2007	≤150	80
Cratical Radiant Flux CHF KW/m ²	GB/T 11785-2005	≥4.5	5.8
Smoke %min	GB/T 11785-2005	≥750	98
Smoke Toxicity Grade	GB/T 20285-2006	Reach To ZA ¹	ZA ¹

Sports Flooring

Recomanded Installation and Method

Depending on the installation method, seams may remain visible and this should not be treated as an inherent flaw of Vinyl Sports Flooring. The subfloor must be dry, smooth, flat and free from dirt or any debris that could affect installation of Vinyl Sports Flooring on the floor.

Do not put objects with pointed edges & do not drag any heavy objects on the floor surfacae. Floor Protectors are recomanded to avoid premature wear & tear. Use a doormat to keep out dirt.

Never use detergent or any concentrated chemical to clean the floor. This may affect shine & shade and cause damage to floor surface.

Sports Flooring - Utility



Badminton Court

Table Tennis Court



Basketball Court



Volleyball Court

Tennis Court



Indoor Futsal Court

Gym Room

Kids Room



Dance Floor



Handball Court

Aerobic Centers



Multi- Purpose Floor



Channel Partners



Mumbai



Maharashtra



Delhi



Karnataka



Kerala



Tamilnadu



Andhra & Telangana



Madhya Pradesh



Gujrat