



Teak
Wooden Flooring

NOVA



6001

NOVA



6002

NOVA



6003

NOVA



NOVA




6005

NOVA



6006

NOVA

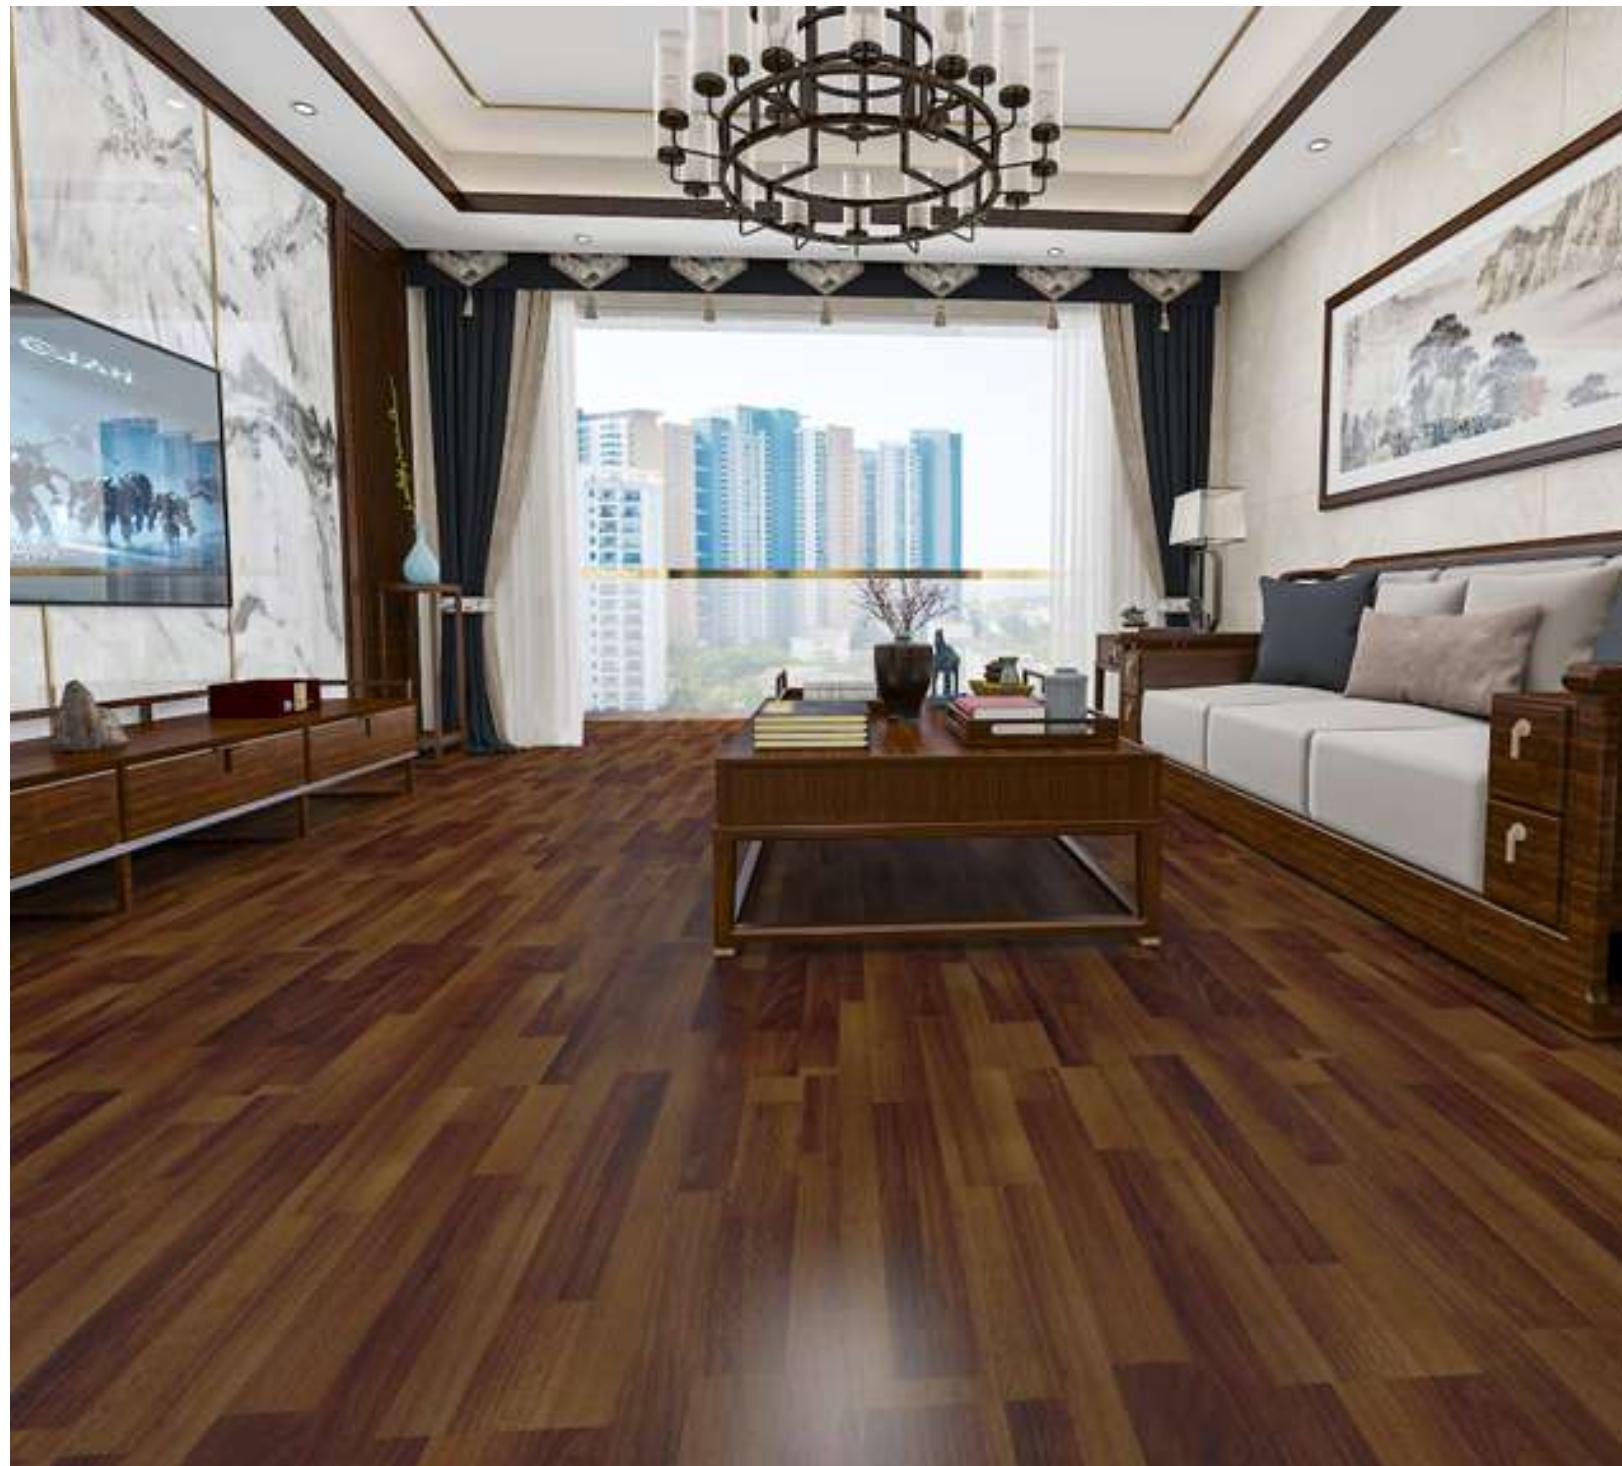

6007

NOVA



6008

NOVA



Vinyl Planks & Tiles



Carpet Planks



Carpet Tiles



Artificial Grass

Technical Data

Top Surface	Melamine Impregnated Flim	 Stain Resistant	 Easy Maintenance	 Flame Resistant
Grade	EN13329:2000	 Bacteria Free	 Impact Resistant	 Hassle-free Installation
Core Density	H.D.F - Density $\geq 850 \text{ kg/m}^3$			
Top Finish	Middle Embossed Surface			
Thickness	8.3mm			
Length X Width	1215 mm X 196 mm			
Box Packing	8 PCS/20.50 Sq. ft			
Locking	Unilin Click			
Formaldehyde Emission	$\leq 1.5\text{mg/L}$ (EN 717-1)			
Fire Resistance	Cfl-s1, EN 13501-1			

RECOMMENDED INSTALLATION

1. Basic requirements for installing laminate flooring are that the subfloor is stable, clean, dry and even.
2. Underlayment is an essential part of a laminate flooring installation that provides cushioning and potential moisture barrier between the subfloor and laminate flooring.
3. Installation must be done by trained and experienced laminate flooring installer.

NOVA

www.novadecorindia.com

Vinyl Planks & Tiles | Wooden Flooring | Carpet Tiles | Artificial Grass