


# Panoscan Manual Addendum

There is one very important setting that has been overlooked in the *Panoscan and Software Reference* manuals... It is the Anti-flicker settings for your country of origin. The software assumes that you are from a country that supplies 50 cycle AC current. In the USA we have 60 cycle AC current. The improper setting of this control can produce vertical banding or strange color shifts when operating the camera under artificial lighting. To set the Anti-flicker feature of your Panoscan camera, simply hold down the "Control", "Option", and "Command (⌘)" keys on your keyboard while opening the camera settings. The following "Synchronization" menu should appear.

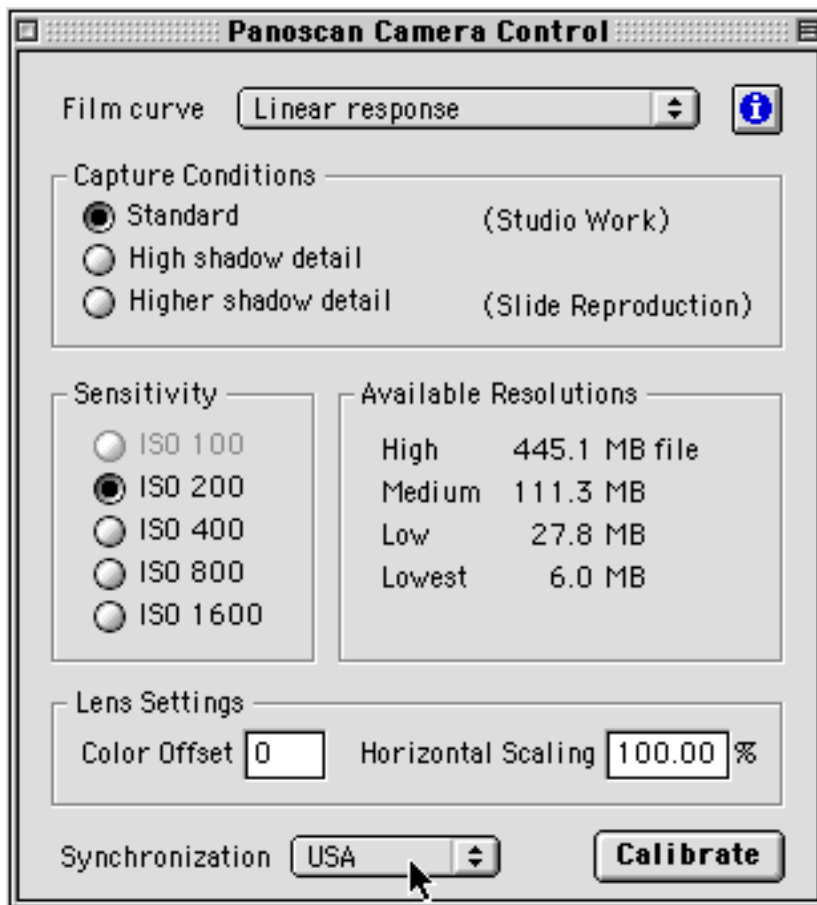

Select the proper country for your intended use.