

Solar Street Light •





Model		BD-X8C
Solar Panel	Туре	MONO
	Power	80W
	Efficiency	19%
	Power	80W
LED Light	CCT	6000K
	LED Chip	Bridgelux
	Luminums Flux	160lm/w
	Type	LiFePO4
Battery	Life Cycle	3000times
	Capacity	512Wh
Intelligent Contoller		MPPT with Microwave Sensor
Wroking Time		12hrs/day, light+time+sensor control
Charge Time		6~7hrs by bright sunlight
Wroking Temperature		-20℃ to 60℃
Installation Height		6~8m
Pole Diameter		60mm
Product Size		1300*432*73mm
Gross Weight		18KG

CCTV Camera Why Choose It HD TF Card Slot 1080P FHD Video Smart Night Vison 2 Night vision modes any switch Maximale ondersteuning 64G Easy Remote Access Wateroroof Motion detection Indoor and outdoor waterproof Motion - activated recording and alarm

Camera parameters •


system	os	HISILICON
	Processor	HI3616EV200+F23A
	Resolution	1080P (1920*1080)
	P2P (Free)	Support P2P Connection
	Onvif Protocol	Support ONVIF protocol
	Cell Phone View	Support iPhone, Android phone APP View
	TF Card	Support maximum 128G
	Recording	Support TF card recording, video play back
Lens	Lens Type	3.6mm lens
	IR-CUT	With IR-CUT
video	Compression	H.265
	Image Sensor	1/2.7" 5 megapixel progressive CMOS sensor
	Image Adjustment	Support
	Frame Rate	20fps(50HZ), 25fps(60HZ)
	Zoom	Support 4X digital zoom
	Stream	First stream: 1080P resolution (1920x1080)
	Stream	Second stream: 720 resolution (1080x720)
Audio	Two Way Audio	Support
Night Vision	Night Vision	30 meters
	Infrared LED	18 IR LED Lamps
4G		LTE FDD:B1/B3/B5/B7/B8/B20/B28
	4G Band	LTE TDD:B38/B40/B41
	40 Dallu	WCDMS:B1/B5/B8
		GSM:900/1800MHZ
	OSD	Support the overlay of OSD name, date and time
	030	information
	Power	information DC12V/1A
	Power	DC12V/1A
Others	Power Shape	DC12V/1A Metal Vandle proof dome camera
Others	Power Shape Color	DC12V/1A Metal Vandle proof dome camera White
Others	Power Shape Color working temperature	DC12V/1A Metal Vandle proof dome camera White -10∼70℃
Others	Power Shape Color working temperature Working humidity	DC12V/1A Metal Vandle proof dome camera White -10~70°C 95% RH Body size: 113mm X Ф120mm
Others	Power Shape Color working temperature Working humidity Size	DC12V/1A Metal Vandle proof dome camera White -10~70°C 95% RH Body size: 113mm X Ф120mm package size: 130 * 130 * 123mm
Others	Power Shape Color working temperature Working humidity Size Weight	DC12V/1A Metal Vandle proof dome camera White -10~70°C 95% RH Body size: 113mm X Ф120mm package size: 130 * 130 * 123mm Net weight: 580g gross weight: 640g

Software •







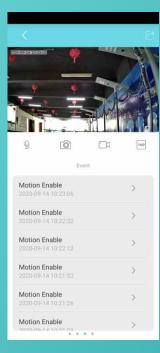



thanks

GAJ SOLAR

Suite#3410, Citadel Tower

Business Bay, Dubai

United Arab Emirates