

SOLAR STREET & COMMERCIAL LIGHTING

2024



To be
the world brand
of solar light

Amazing
the World
in Technology

Pursuing excellent service delivery
Attach importance to professional teams
Completely focus on our partners

We would not
be so successful
without your support

**Innovating
the future of solar**

www.gajsolar.com



CONTENTS

Solar Street Light



Delta P12-13



Atlas Max P14-15



Atlas P16-17



Basalt P18-19



Thermos 2 P20-21

Solar Landscape Light



HONOR P23-24



HONOR P25-26



Navigator P28-29

Solar Area Light



Tracker P30

Solar Spot Light



Inf inex P31



Polar P32


Solar Flood Light



Navigator P33

Solar Street Light

All In One Series

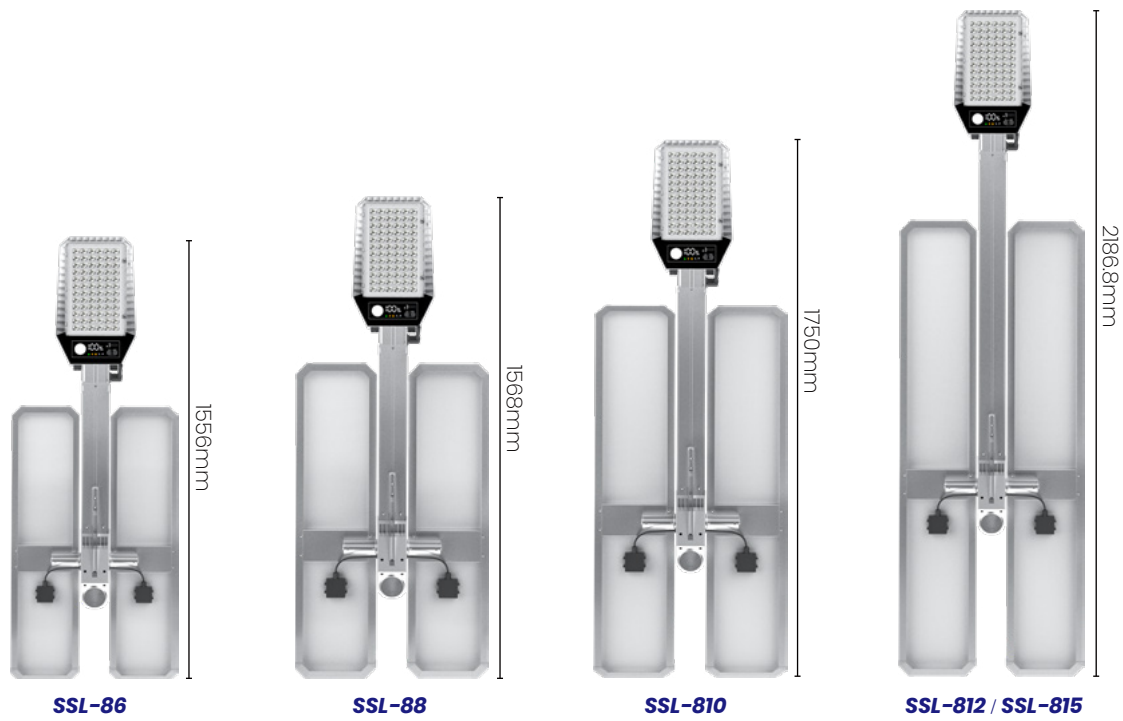

APPLICATION




Item	LED Lumens	Solar Panel	CCT	Battery	Lighting Mode	Charging Time
SSL-86	6000LM	60W	5700K 3000K	358.4WH	M1: 30% (PIR30S) Till dawn M2: 100%(5H) + 25%(5H)(PIR30S)+ 70% Till dawn M3: 70% Till dawn	6.7H
SSL-88	8000LM	86W		460.8WH		6H
SSL-810	10000LM	112W		563.2WH		5.7H
SSL-812	12000LM	140W		665.6WH		5.3H
SSL-815	15000LM	140W		819.2WH		6.6H



FEATURES

- More convenient control
- Higher charging efficiency

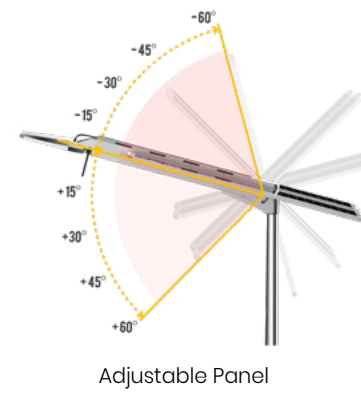


- Change Lighting Mode
- Change CCT
- Switch on/off PIR



Display Panel AC Input



Display Panel

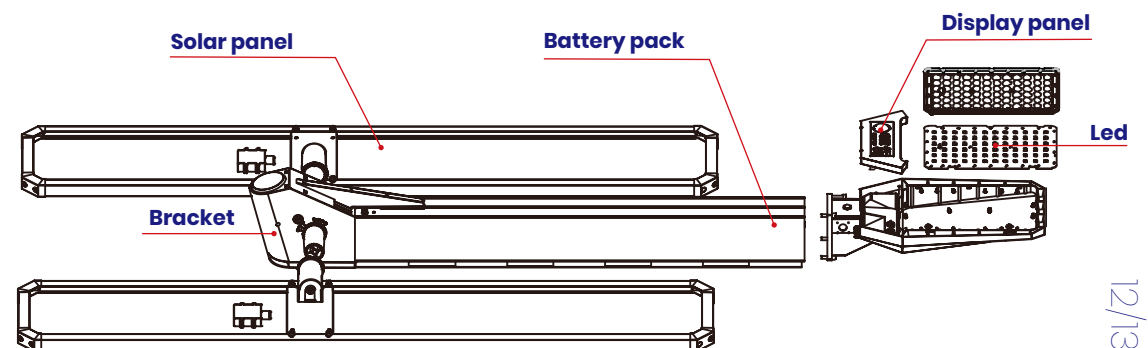


NEW 2024
ARRIVEL



Item	LED Lumens	Solar Panel	LED (OSRAM)	CCT	Battery	Lighting Mode	Charging Time
SSL-340	8800LM	112W	3030,72pcs	3000K 5700K	665.6WH	M1: 30% Till dawn+ PIR 30S M2: 100%(5H) + 25%(PIR 30S)(5H) + 70% Till dawn M3: 70% Till dawn	6H
SSL-350	11000LM				819.2WH		7H
SSL-360	13200LM	140W	3030,144pcs		972.8WH		7H
SSL-370	15400LM				1126.4WH		8H


FEATURES

- More convenient control
- Suitable for higher temperature area

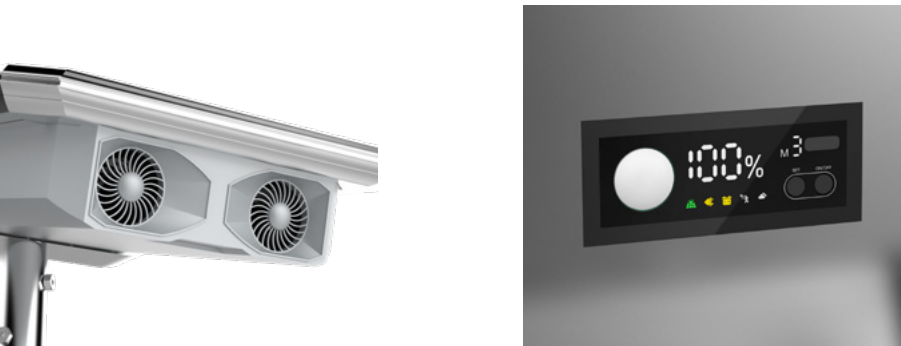


Dual fans cooling

Display Panel

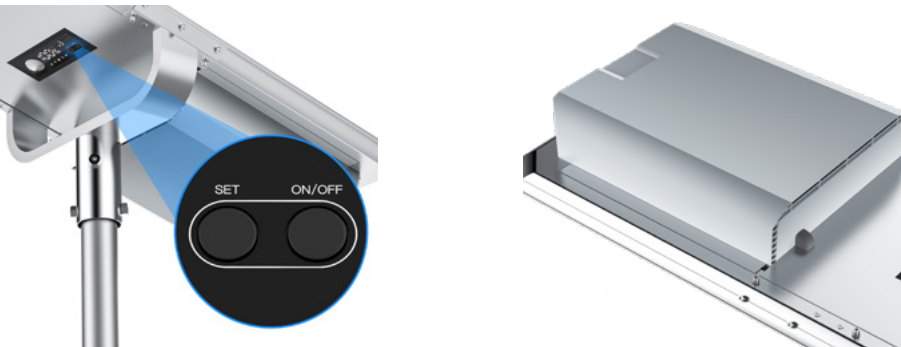


- Change Lighting Mode
- Change CCT
- Switch on/off PIR

Battery Pack
Easy to Maintain

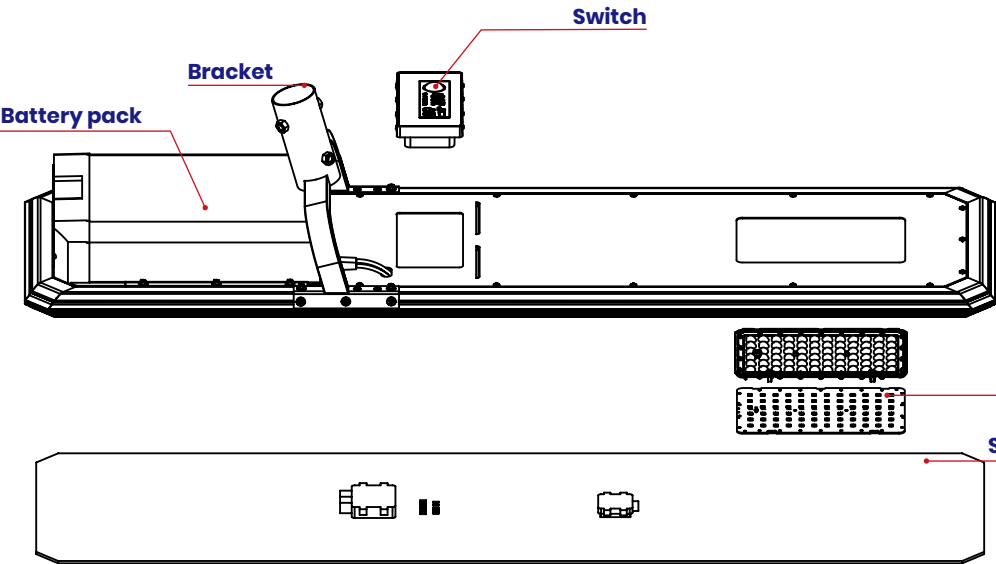

ATLAS SERIES


Win More Than 3500+ Tenders In The World!

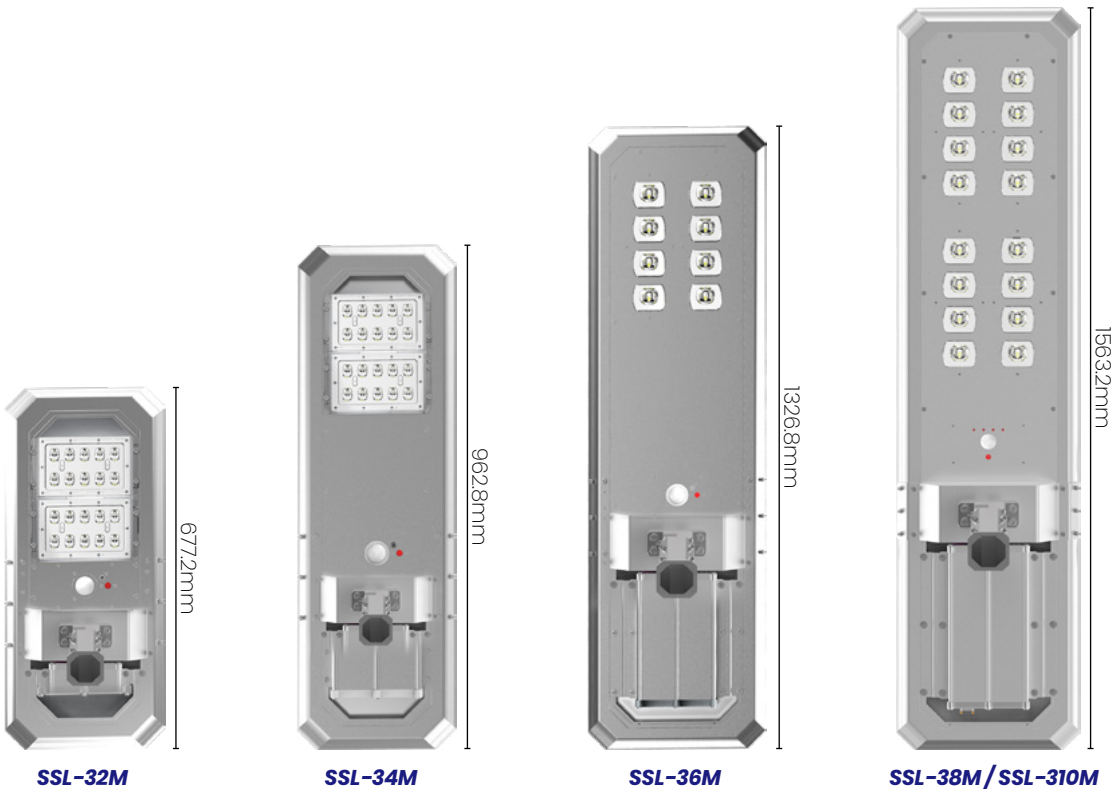

Item	LED Lumens	Solar Panel	LED (OSRAM)	CCT	Battery	Lighting Mode	Charging Time
SSL-32M	2000LM	25W	3030, 20pcs	5700K	153.92WH	M1: 30% + PIR M2: 100%(5H) + 25%(PIR)(5H) + 70% M3: 70% Till dawn	6.7H
SSL-34M	4000LM	37.5W	3030, 40pcs	5700K	269.36WH		7.8H
SSL-36M	6000LM	60W	3030, 80pcs	5700K	423.28WH		7.7H
SSL-38M	8000LM	75W	3030, 160pcs	5700K	577.2WH		8.4H
SSL-310M	10000LM	75W	3030, 160pcs	5700K	692.64WH		10H

FEATURES


- Unique simple design
- large LED panel for wider lighting area
- Involved in government procurement list

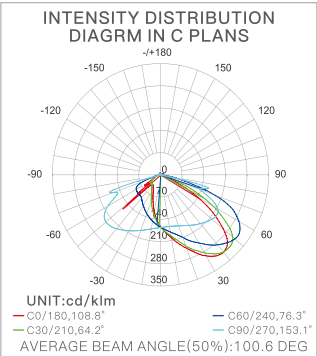

SSL-32M/SSL-34M




For Φ60mm pole
Rust Proof bracket

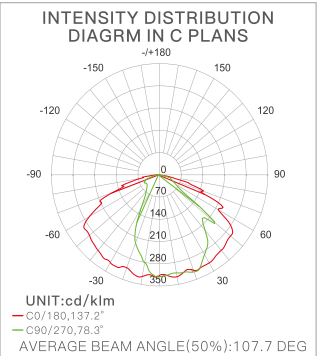

SSL-36M/SSL-38M/SSL-310M




Battery Pack
Easy to Maintain

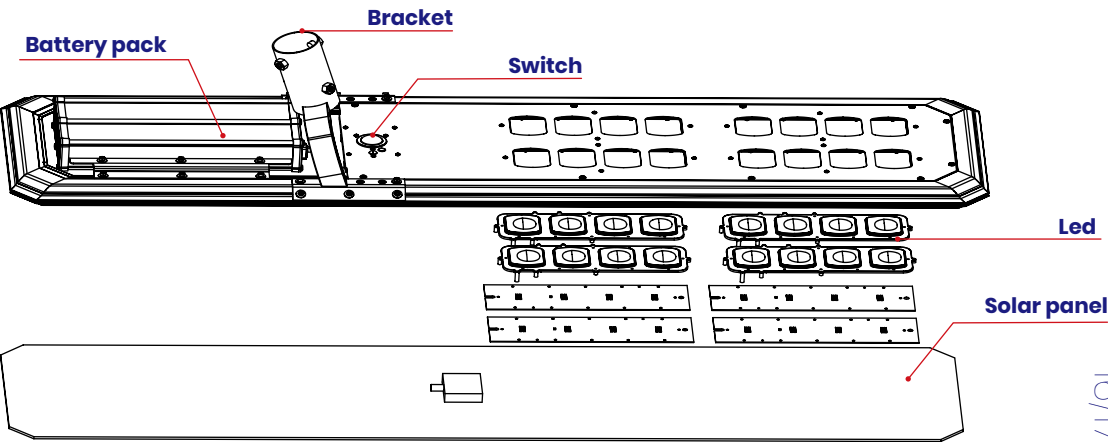

BASALT SERIES


Win More Than 1000 Tenders In The World

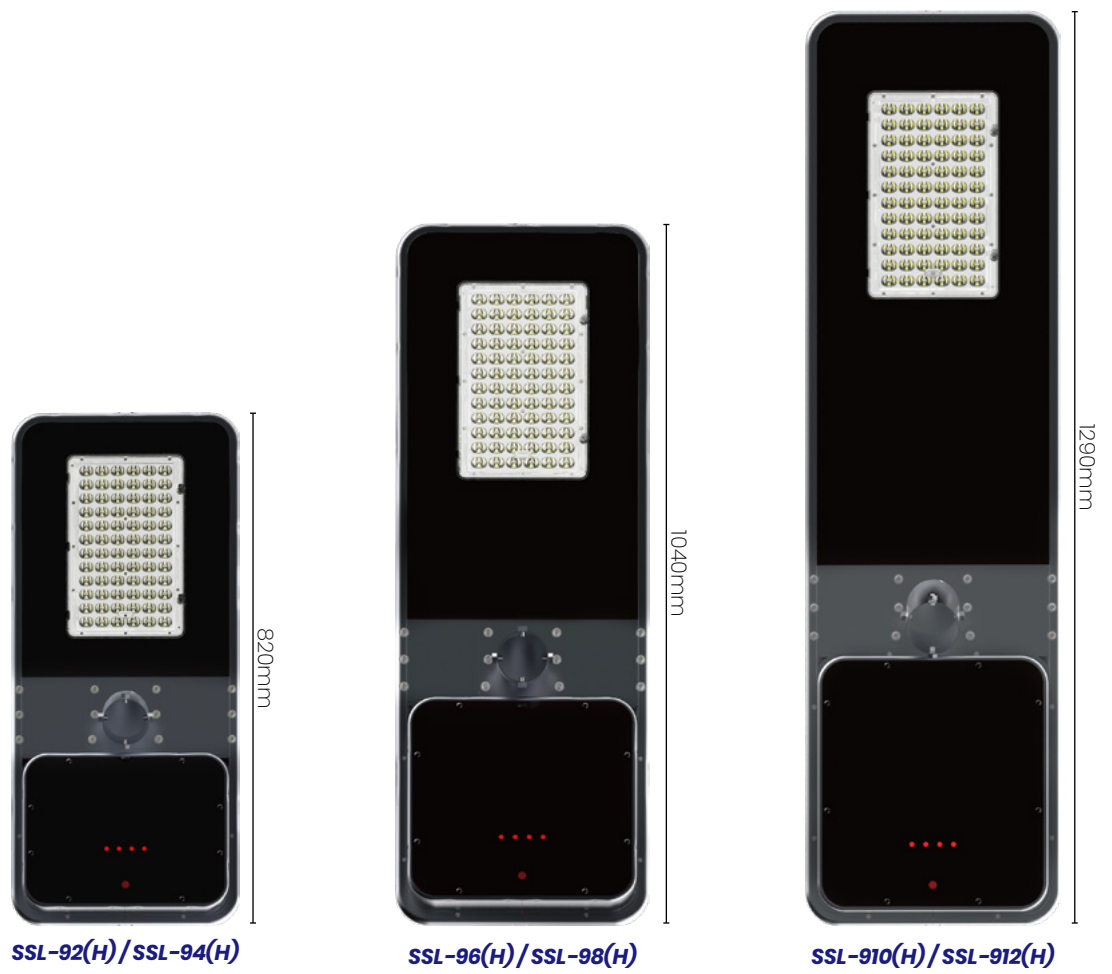


Item	LED Lumens	Solar Panel	LED (OSRAM)	CCT	Battery	Lighting Mode	Charging Time
SSL-92(H)	2000LM	37.5W	3030, 72pcs	4000K	153.92WH	100% (5H) + 20% Till dawn	4.5H
SSL-94(H)	4000LM	37.5W	3030, 72pcs	4000K	230.88WH		6.5H
SSL-96(H)	6000LM	60W	3030, 144pcs	4000K	346.32WH		6.3H
SSL-98(H)	8000LM	60W	3030, 144pcs	4000K	461.76WH		8.4H
SSL-910(H)	10000LM	75W	3030, 288pcs	4000K	577.2WH		8.4H
SSL-912(H)	12000LM	75W	3030, 288pcs	4000K	692.64WH		10H

FEATURES

- Ultra thin design, only 22mm thickness
- Self-test by flashing indicator
- Optic distribution: Type IV, d/h=4:1

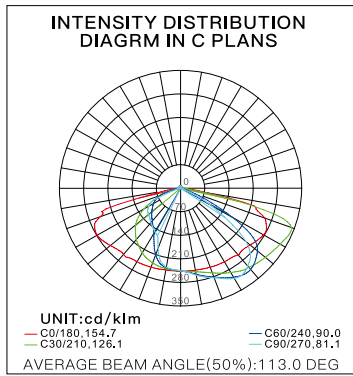

Lighting Distribution

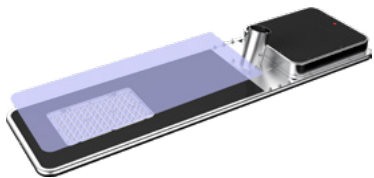


Explosion Proof Glass



For Φ60mm pole
Rust Proof bracket




4 Parts Fault Alarm

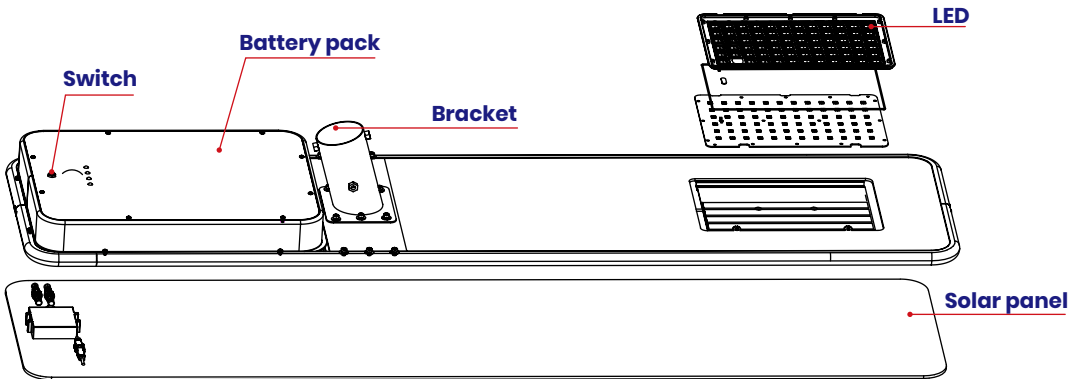

THERMOS SERIES


Preferred Luminaire For Urban Main Street Lighting Project

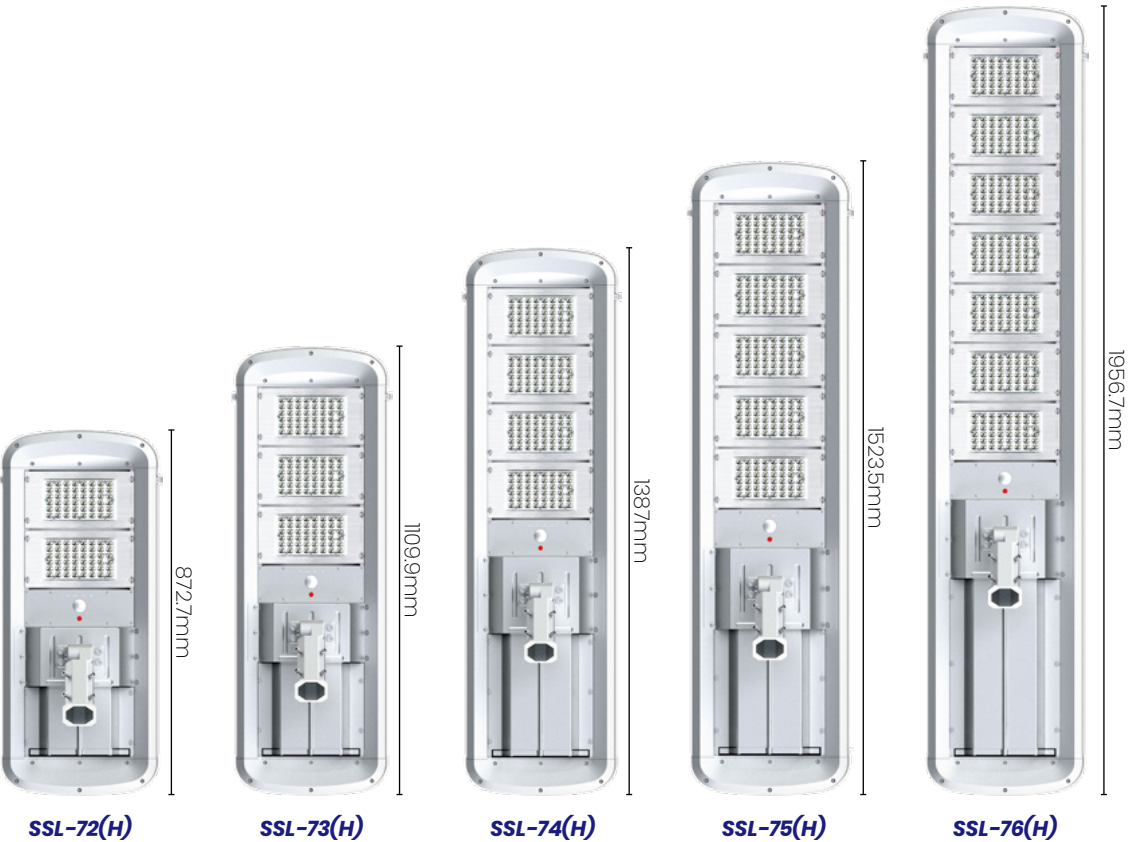

Item	LED Lumens	Solar Panel	LED (OSRAM)	CCT	Battery	Lighting Mode	Charging Time
SSL-72(H)	4000LM	35.7W	3030, 96pcs	4000K	269.36WH	100% (5H) + 20% Till dawn	8.2H
SSL-73(H)	6000LM	47.5W	3030, 144pcs	4000K	384.8WH		8.8H
SSL-74(H)	8000LM	61.4W	3030, 192pcs	4000K	538.72WH		9.6H
SSL-75(H)	10000LM	78.8W	3030, 240pcs	4000K	654.16WH		9H
SSL-76(H)	12000LM	95W	3030, 336pcs	4000K	769.6WH		8.8H

FEATURES

- Automatic cleaning function (Sweeping dust and snow)
- Self-test by flashing indicator

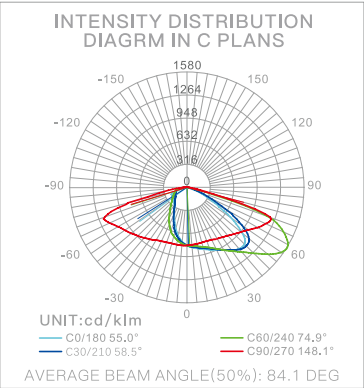


Lighting Distribution




For Φ60mm pole
Adjustable angle



Auto cleaning Function

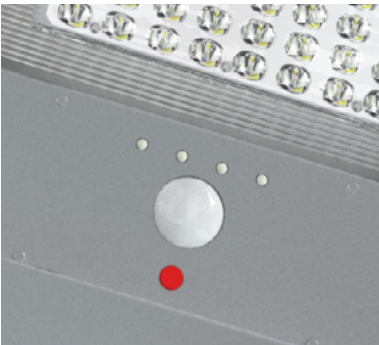

4 Parts Fault Alarm

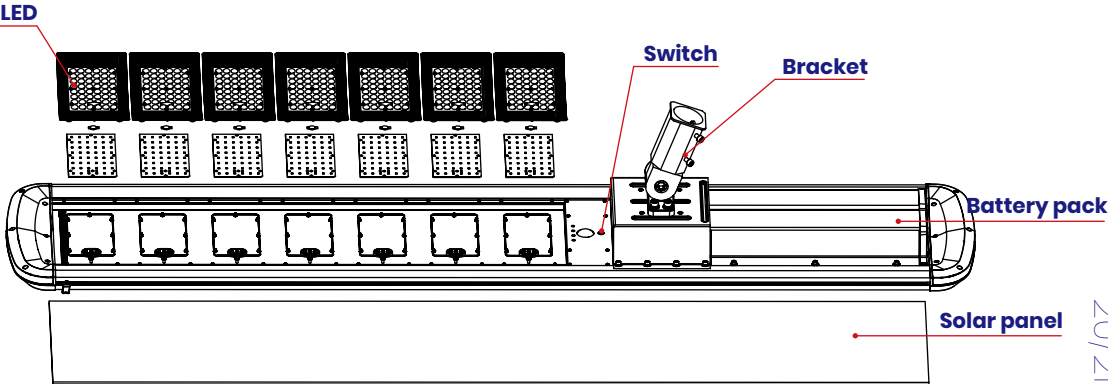




Solar Landscape Light

Honor Series

CE FC RoHS CB

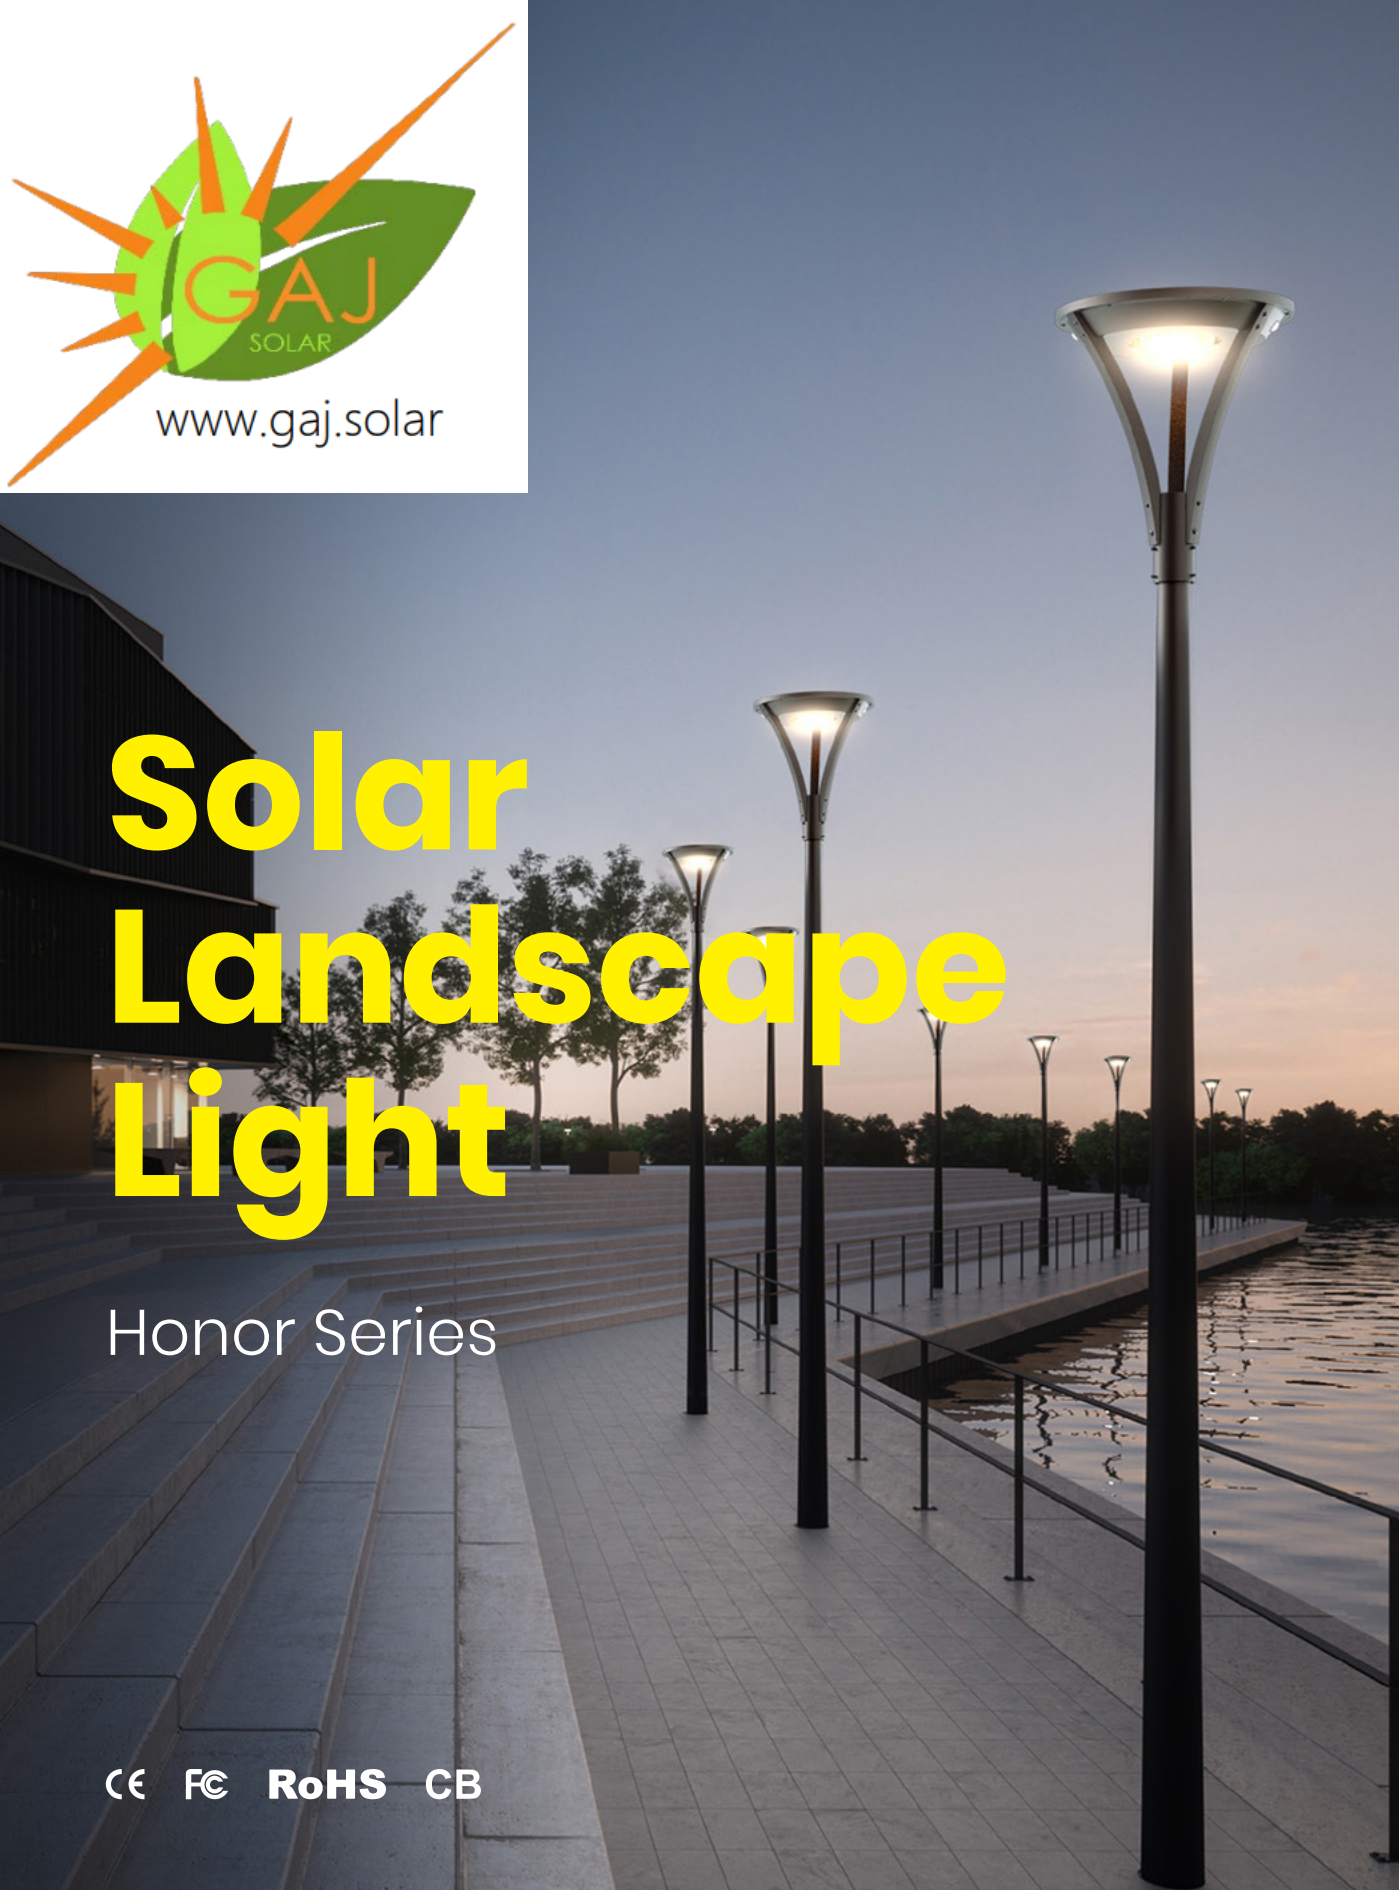

HONOR SERIES

Preferred Luminaire For Modern Community Lighting Project


SOLAR LANDSCAPE LIGHT



Item	SLL-3I	SLL-3IH
LEDlumens	3000LM	3000LM
Solar Panel	18.75W	18.75W
LED (OSRAM)	3030, 42pcs	3030, 42pcs
Lighting Mode	M1: 15% + PIR (ALS2.4) M2: 30% 5h + 15% Till dawn M3: 35% Till dawn	
CCT	4000K	4000K
Battery	115.44WH	115.44WH
Charging Time	6.7H	7H
Charging / Discharging Temp	0~45 C / -20~+60 C	20~60 C
Core technology	ALS2.4	ALS2.4 / TCS1.0

FEATURES

- Dark sky (0 light pollution to city)
- Modern Europe style design

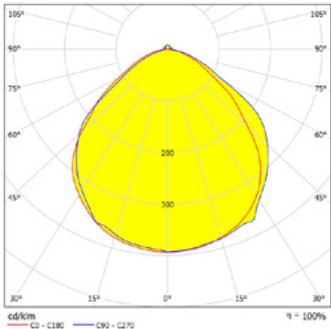

Lighting Distribution




2 PIR Motion Sensor
Sensing Angle 120° x 2



Detachable Design
For $\Phi 60\text{mm}$ pole



Indicator IR Receiver Switch

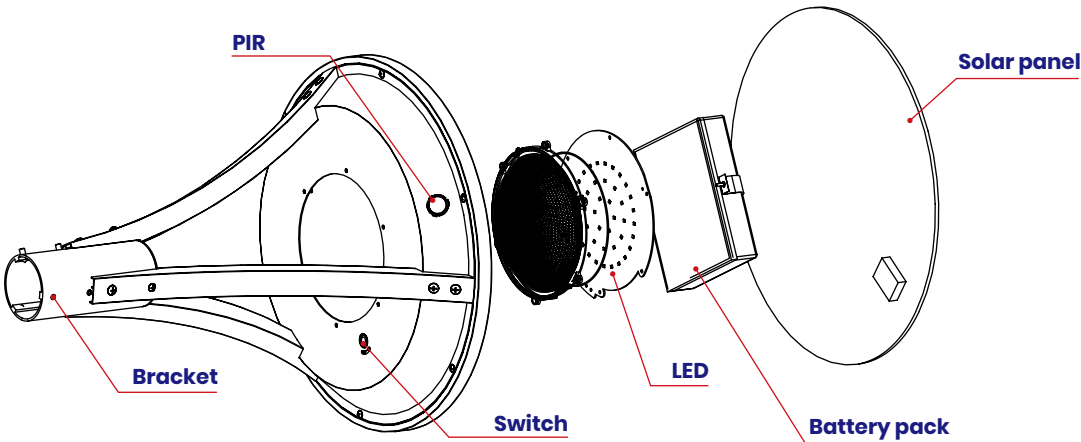

HONOR SERIES


Eternal Classical Only In SRESKY



Item	SLL-10M
LEDlumens	3000LM
Solar Panel	15W
CCT	5700K, Ra 80+
Battery	115.44WH
LED (OSRAM)	3030, 80pcs
Lighting Mode	M1: 15% + PIR (ALS2.4) M2: 30% 5h + 15% Till dawn M3: 35% Till dawn
Charging Time	8.4H
Capacity Indication	Green Light: >70%, Orange Light: 30%-70%, Red Light: <30%

FEATURES

- 18th Century Classical European design
- 3 LEDs power indicators

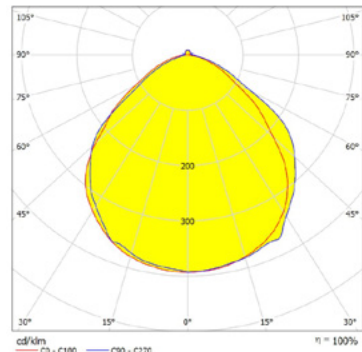

Lighting Distribution




2 PIR Sensor: >3m



For $\Phi 60\text{mm}$ pole



Hidden Solar Panel

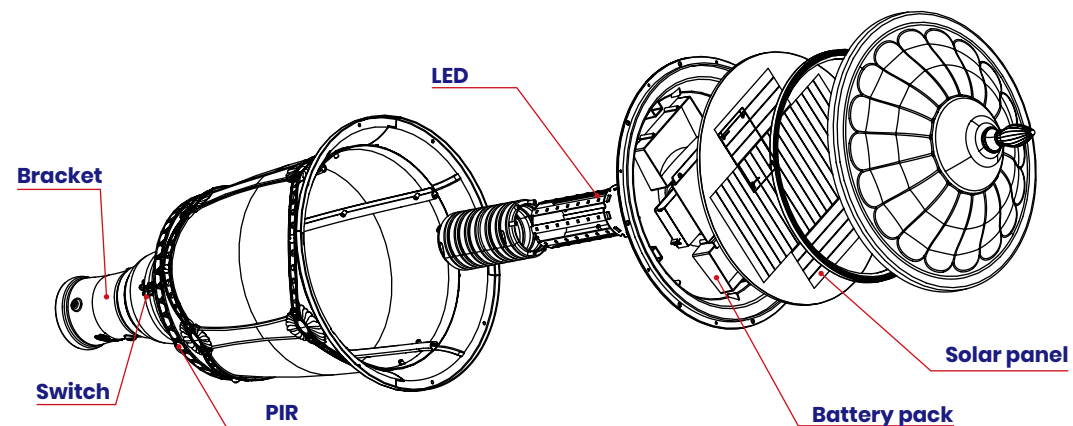

Commercial Lighting

Powerful And Smart


CE FC RoHS CB

NAVIGATOR


Powerful And Smart




Item	LED Lumens	Voltage / Power	ColorTemperature(CCT)	IP/Ik/Anti-Corrosion	Lighting Mode	Core Technology
AAL-02(H)	5000LM	16.2V / 30W	3000K(90pcs) 5700K (90pcs)	IP66 / IK10 / C4H	Setting by App	ALS 2.5 / TCS 3.0 / FAS

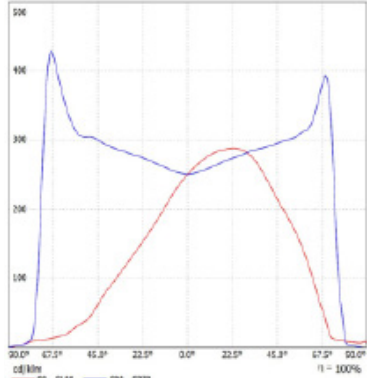

Illumination Curve

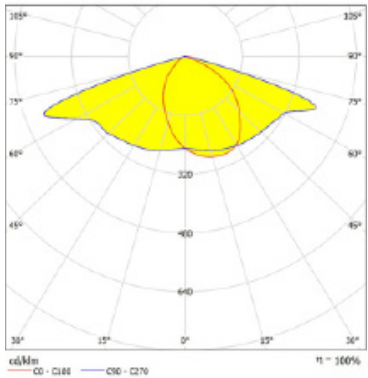


Luminance Distribution

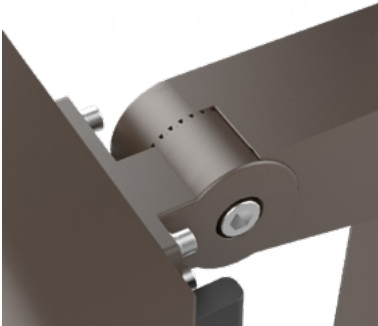

Adjustable angle



4 Parts Fault Alarm

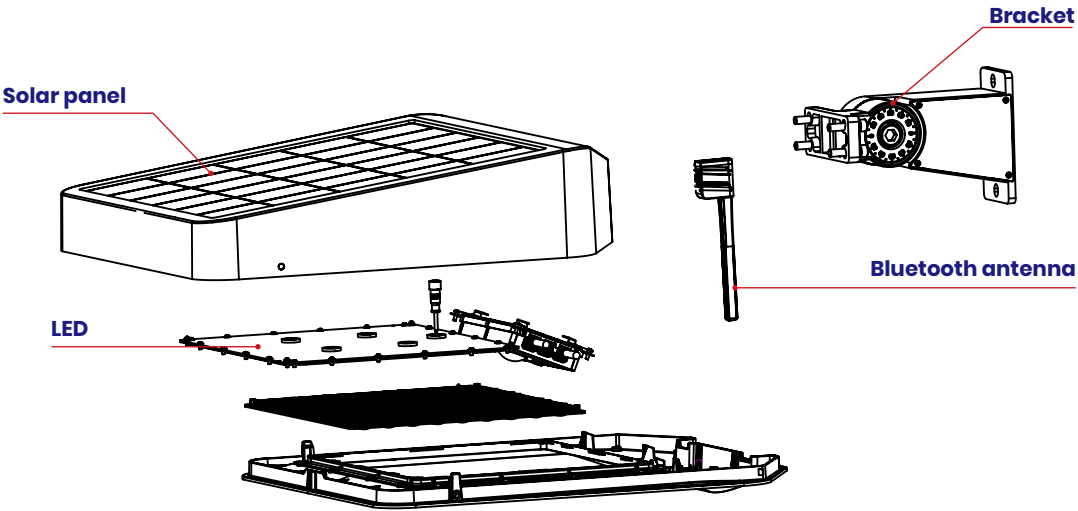

TRACKER

360° Sunlight Auto-Tracking

Solar Panel: **Monocrystalline glass lamination**
 Battery: **Li-ion**
 Luminous Flux Max: **300LM**
 Color Temperature(CCT): **3000K / 4000K**
 IP/IK/Anti-Corrosion: **IP66 / IK10 / C4H**
 Control: **APP/ CDS sensor**
 Core Technology: **ALS 2.5 / TCS 3.0**




AWM-01



ALL-01




ABL-01

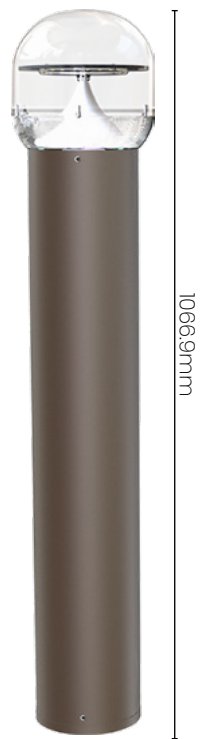


ABL-02



ABL-03



Illumination Curve




Luminance Distribution



INF INEX SPOT LIGHT CCT/RGB

The Beauty Of Your Outdoor Space


Solar Panel: **Monocrystalline glass lamination**
 Battery: **Li-ion**
 Luminous Flux Max: **CCT: 220LM / 880LM; RGB: 2.1W / 8.2W**
 Color Temperature(CCT): **2700K~6500K**
 IP/IK: **IP66 / IK08**
 Control: **APP/ CDS sensor**
 Core Technology: **ALS 2.5 / TCS 3.0**

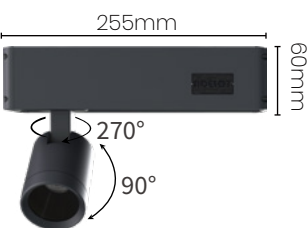

CCT: DST-11
RGB: DST-12



CCT: DST-21
RGB: DST-22

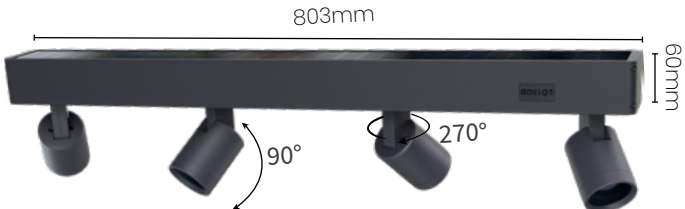

CCT: DST-13
RGB: DST-14



CCT: DST-23
RGB: DST-24



POLAR SPOT LIGHT

Highlight Your Outdoor Space

Solar Panel: **Monocrystalline glass lamination**

Battery: **Li-ion**

Luminous Flux Max: **150LM (ASL-01); 150LM*2 (AUL-01)**

Color Temperature(CCT): **3000K / 4000K**


IP/IK/Anti-Corrosion: **IP66 / IK10 / C4H**

Control: **APP/ CDS sensor**

Core Technology: **ALS 2.5 / TCS 3.0**



ASL-01

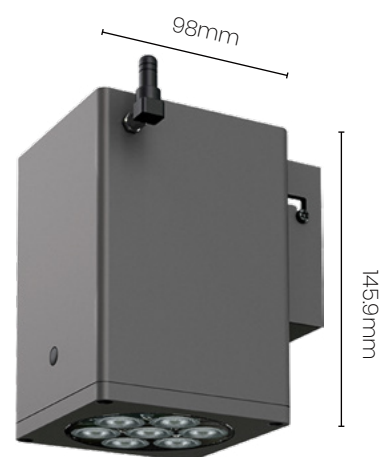

AUL-01

NAVIGATOR WALLPACK FLOOD LIGHT

Split-Type Design More Flexible Installation

Solar Panel: **Monocrystalline glass lamination**

Battery: **Li-ion**


Luminous Flux Max: **3000LM**

Color Temperature(CCT): **3000K(56pcs)+5700K(56pcs)**

IP/IK/Anti-Corrosion: **IP66 / IK10 / C4H**

Control: **APP/ CDS sensor / PIR**

Core Technology: **ALS 2.5 / TCS 3.0**

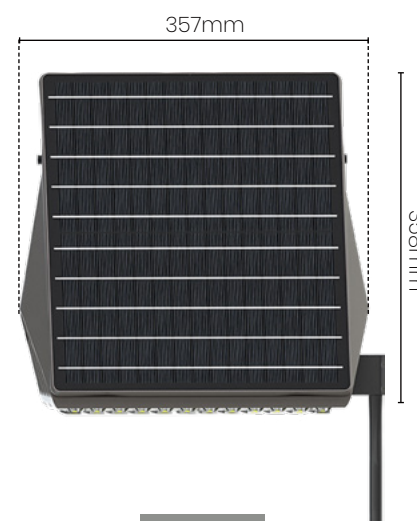

AWM-02



AFL-02



*Innovating the future
of solar lighting*

Email: bj@gaj.solar

Tel: **+971 55 1111 309**

Website: www.gaj.solar

Address: **Suite No. #2509, SIT TOWER, SILICON OASIS, Dubai, UAE.**