

"Solar Street Light"



www.gaj.solar

"Solar Street Light"

INTEGRATED ALUMINUM FRAME IS UNIFORMLY STRESSED, SUPER BREAKAGE RESISTANT, NO FEAR OF HARSH ENVIRONMENTS



A one-piece plastic tempered glass panel gives the shell excellent structure, Strength and beauty



POWER LI-ION BATTERY
TCS technology for light
can work well in High and low
temperature during 0°~45°




BASALT SERIES


Ultra slim body, ultimate simple

10+ days continuous lighting even in rainy day
3 lighting modes to fit what you need
Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 2000LM/4000LM/6000LM/8000LM/10000LM/12000LM
Core technology: ALS 2.3 / TCS1.0 / FAS 1.0
Warranty: 3years

DIALUX road simulation map



SSL-92~912



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-92	20W	4000K	3m	15m	10kg
SSL-94	40W	4000K	4m	18m	10kg
SSL-96	60W	4000K	6m	27m	13kg
SSL-98	80W	4000K	8m	36m	13kg
SSL-910	100W	4000K	10m	45m	16kg
SSL-912	120W	4000K	12m	54m	16kg



SSL-92/94

SSL-96/98

SSL-910/912

THERMOS 2 SERIES

Using everywhere in the world

Solar panel self-clean system
Working temperature: -20C° to +60C°
Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 4000LM/6000LM/8000LM/10000LM/12000LM
Core technology: ALS2.3 / TCS 1.0 / FAS 1.0
Warrenty:3 years



Automatic
cleaning



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-72	40W	4000K	4m	20m	14kg
SSL-73	60W	4000K	6m	24m	15kg
SSL-74	80W	4000K	8m	32m	17kg
SSL-75	100W	4000K	10m	40m	19kg
SSL-76	120W	4000K	12m	48m	22kg



SSL-72



SSL-73




SSL-74



SSL-75



SSL-76



DIALUX carte de simulation de route



Elite 1

Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 6000LM/8000LM/10000LM/12000LM
Core technology: ALS2.1 / TCS 1.0
Warrenty: 3 years





The internet is always on
wherever you are, one-click control



Elite 1

The internet is always on wherever you are,
one-click control

Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 6000LM/8000LM/10000LM/12000LM
Core technology: ALS2.1 / TCS 1.0
Warrenty: 3 years



Support APP/WEB, Remote management
Fault warning, Automatic push node fault to APP/WEB
Automatic Statistics energy consumption to the server
Gateway with GNSS, search the lighting on map quickly
Setup by APP and control the statues of the lighting



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SIL-60	60W	4000K	7m	24m	14kg
SIL-80	80W	4000K	8m	30m	18.5kg
SIL-100	100W	4000K	10m	40m	19kg
SIL-120	120W	4000K	12m	48m	21.5kg



SIL-120




SIL-100



SIL-80



SIL-60



DIALUX road simulation map


ATLAS 1M SERIES

Simple, but durable

10+ days continuous lighting even in rainy day
3 lighting modes to fit what you need
Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 2000LM/3000LM/4000LM/5000LM/6000LM/7000LM/8000LM/9000LM/10000LM
Core technology: ALS2.0 / TCS 1.0
Warranty: 3years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-32M	20W	6000K	3m	15m	7.55kg
SSL-33M	30W	6000K	3m	15m	8.7kg
SSL-34M	40W	6000K	4m	15m	10.05kg
SSL-35M	50W	6000K	5m	15m	12.55kg
SSL-36M	60W	6000K	6m	22m	13.4kg
SSL-37M	70W	6000K	7m	28m	15.8kg
SSL-38M	80W	6000K	8m	28m	19.4kg
SSL-39M	90W	6000K	9m	32m	19.7kg
SSL-310M	100W	6000K	10m	32m	20kg

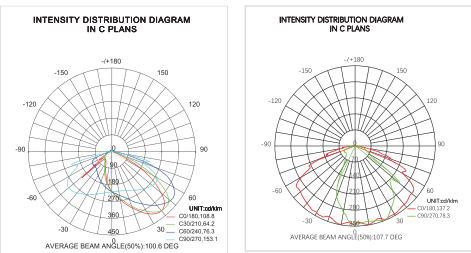


SSL-32~34

SSL-35~310

DIALUX road simulation map





ATLAS 2 SERIES

Saving your custom tariffs by SKD

Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 8000LM/12000LM
Core technology: ALS2.3 / TCS 1.0
Warrenty: 3 years

SKD shipping



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-42	80W	4000K	8m	32m	17.3kg
SSL-43	120W	4000K	12m	32m	21.5kg

DIALUX carte de simulation de route





TITAN 2

Split solar street light special design for high latitude areas!

High Brightness Split solar street light 40W-150W

Material: Aluminium alloy+PC


Solar cell: Mono-crystalline

Battery: Li-ion battery with 2000 lifespan

LED: 4000LM/6000LM/8000LM/10000LM/12000LM/15000LM

Core technology: ALS 2.4 / TCS 2.0 / FAS 1.0

Warranty: 3years




Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-64	40W	4000K	4m	20m	12kg
SSL-66	60W	4000K	6m	25m	12kg
SSL-68	80W	4000K	8m	30m	20.5kg
SSL-610	100W	4000K	10m	35m	20.5kg
SSL-612	120W	4000K	12m	42m	28kg
SSL-615	150W	4000K	15m	50m	28kg

DIALUX road simulation map



ARGES

10+ days continuous lighting even in rainy day
Classic-pro with professional LENS and brighter lighting
Material: Die casted Aluminium+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 3000LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 3years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-06M	30W	6000K	3m	12m	7.8kg

DIALUX road simulation map



SSL-06M

UFO

10+ days continuous lighting even in rainy day
Remote control with 3 lighting modes
360 ° lighting
Material: Die casted Aluminium+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 2000LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 3 years




Model type	LED power	Colour temperature	mounting height	Install distance	Luminaire net weight
SLL-12N1	20W	6000K	3m	10m	6kg

DIALUX road simulation map



SLL-12N1

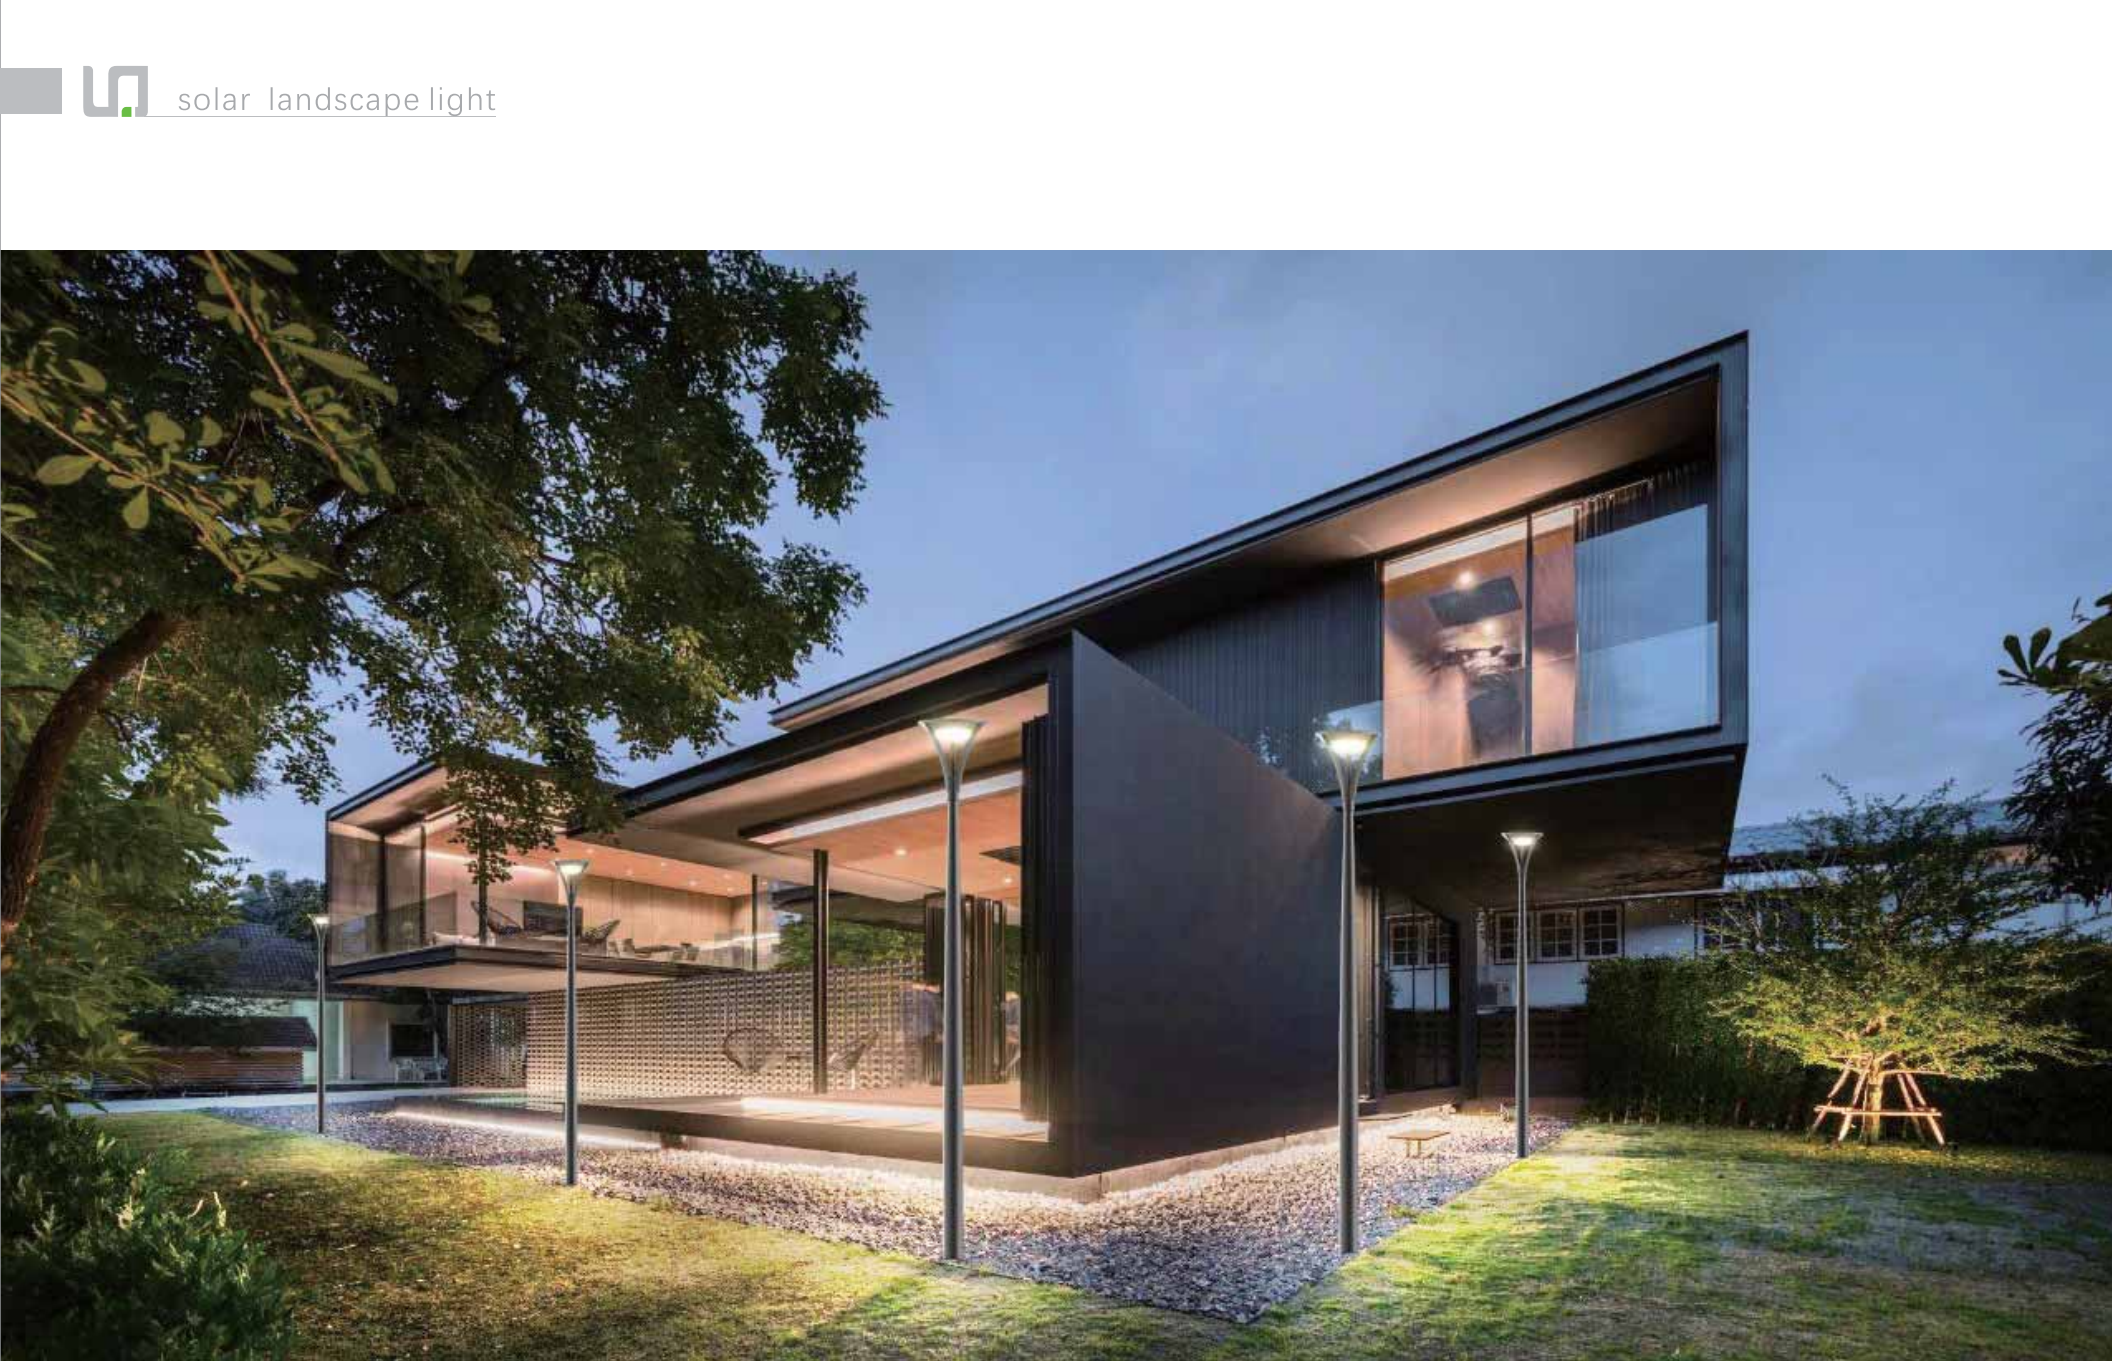

SLL-31 Working Well In 0°C ~ 45°C

SLL-31H Working Well In -20°C ~ 60°C

More Brighter, More Durable
360°lighting Decoration and Lighting All In One

Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 3000Lumens
Core technology: ALS2.4 / TCS 1.0
Warranty: 3 years



       					
Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SLL-31	30W	4000K	3.5m	3-3.5m	5.5kg
SLL-31H	30W	4000K	3.5m	3-3.5m	5.5kg






HALO series 1

Bright Solar Plaza Light

Sresky Unique Patent Design for Cold and Hot area

Material: Aluminium alloy+PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 2000 lifespan
LED: 2000Lumens
Core technology: ALS2.1 / TCS 1.0
Warranty: 3 years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SLL-09	20W	4000K	3.5m	14m	4.5kg




Halo 2

Large Area Lighting
Special design in Very Cold Area application

Material: Aluminium alloy+PC
Solar cell:Mono-crystalline
Battery:Li-ion battery with 2000 lifespan
LED: 6000Lumens
Core technology: ALS2.1 / TCS1.0 / Bluetooth / Anti-brid
Warrenty:3 years

SKD shipping




SLL-26

High Bright Solar Outdoor Light

Bluetooth + APP control + anti-brid function



DIALUX carte de simulation de route

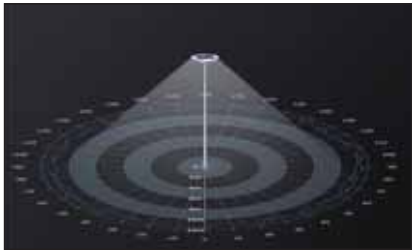

Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SLL-26	60W	4000K	6-12m	24m	19.5kg






Feel it's brightness.



SCL-01N

Illuminate your courtyard



10+ days continuous lighting even in rainy day,
Sensitive PIR sensor,
Remote control with 3 lighting modes
Material: PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 1000LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 2 years



Model type	LED power	Colour temperature	mounting height	Install distance	Luminaire net weight
SCL-01N	10W	6000K	3m	12m	2.86kg



DIALUX road simulation map





SCL-03


Brighter & More durable

Material: Aluminium alloy+PC
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 3000LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 3 years



Model type	LED power	Colour temperature	Luminaire net weight
SCL-03	30W	4000K	1.7kg


personalized colour



HONOR SERIES

18th Century Stylish Design

7+ days continuous lighting even in rainy day
2 PIR motion sensor for more sensitive detection
Build-in Solar panel keep appearance more elegant
Material: Die casted Aluminium
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 2000LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 2 years



Model type	LED power	Colour temperature	mounting height	Install distance	Luminaire net weight
SLL-10N	20W	6000K	3m	14m	6.9kg



You are right! It's solar light with invisible solar panel!

DEFENDER 1



SOLAR HD WIFI CAMERA

DEFENDER 1

solar wifi camera standing by for all day

Material: PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 1000LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 2 years

- Solar Power Supply
- Wi-fi 2.4ghz
- Sony Sensor : imx323
- Notification : Pir Activated
- Working Status Indicator
- Operating Time >90days
- Color Images Day & Night
- Video: 1080p H.264
- Duplex Communication
- Cloud Storage




Model type	LED power	Colour temperature	Luminaire net weight
SIC-103CW	10W	4000K	1.7kg



DEFENDER 2



SOLAR HD 4G
CAMERA



DEFENDER 2
4G wireless solar powered IP camera

Material: PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 1000LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 2 years



Model type	LED power	Colour temperature	Luminaire net weight
SIC-105CG	10W	4000K	1.3kg







MIRAGE 1

Brighter & More durable

Material: Aluminium alloy+PC
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 50LM
Core technology: ALS2.1 / TCS 1.0
Warranty: 1 year



Model type	LED power	Colour temperature	Luminaire net weight
SGL-07PRO	0.5W	3000K	2.0kg

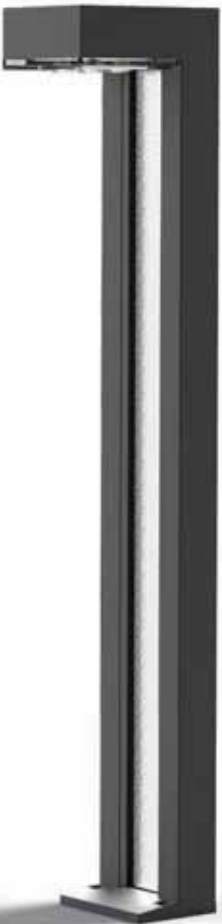

SGL-07PRO

SWL-05PRO

Brighter & More durable

Arm design for larger lighting area
Material: Aluminium alloy+PC
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 1000Lumens
Core technology: ALS2.1/TCS 1.0
Warranty: 1 year



Model type	LED power	Colour temperature	Luminaire net weight
SWL-05PRO	10W	3000K	0.5kg



personalized colour



SWL-06PRO

Brighter & More durable

Arm design for larger lighting area
Material: Aluminium alloy+PC
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED: 2000Lumens
Core technology: ALS2.1/TCS 1.0
Warranty: 2 years



Model type	LED power	Colour temperature	Luminaire net weight
SWL-06PRO	20W	3000K	1.16kg




personalized colour



Mars 1

Small body and High brightness

Material: ABS
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED : 1000Lumens
Core technology: ALS 2.1 / TCS 1.0
Warrenty: 1 year



Model type	LED power	Colour temperature	mounting height	Luminaire net weight
SWL-11	10W With PIR	4000K	2.5m	0.3kg



Multi installation methods

Application angle adjustable for lighting direction change



Cable Tie



Cable Tie



Screw






2000LUMENS SUPER BRIGHT EMERGENCY SOLAR WALL LIGHT
Scientific Light Distribution

Mars 2

DO AS YOU WISHES,WORKING LIKE A MAGIC CUBE
Widely application outdoor
Various angles adjustable for Multi-directional lighting


Material: ABS + PC
Solar cell: Mono - crystalline
Battery: Li-ion battery with 1500+ lifespan
LED : 2000Lumens
Core technology: ALS 2.3 / TCS 1.0
Warrenty:1 year



Moving
Horizontally




Vertical
Sliding



Model type	LED power	Colour temperature	mounting height	Luminaire net weight
SWL-12	20W	4000K	3m	0.5kg



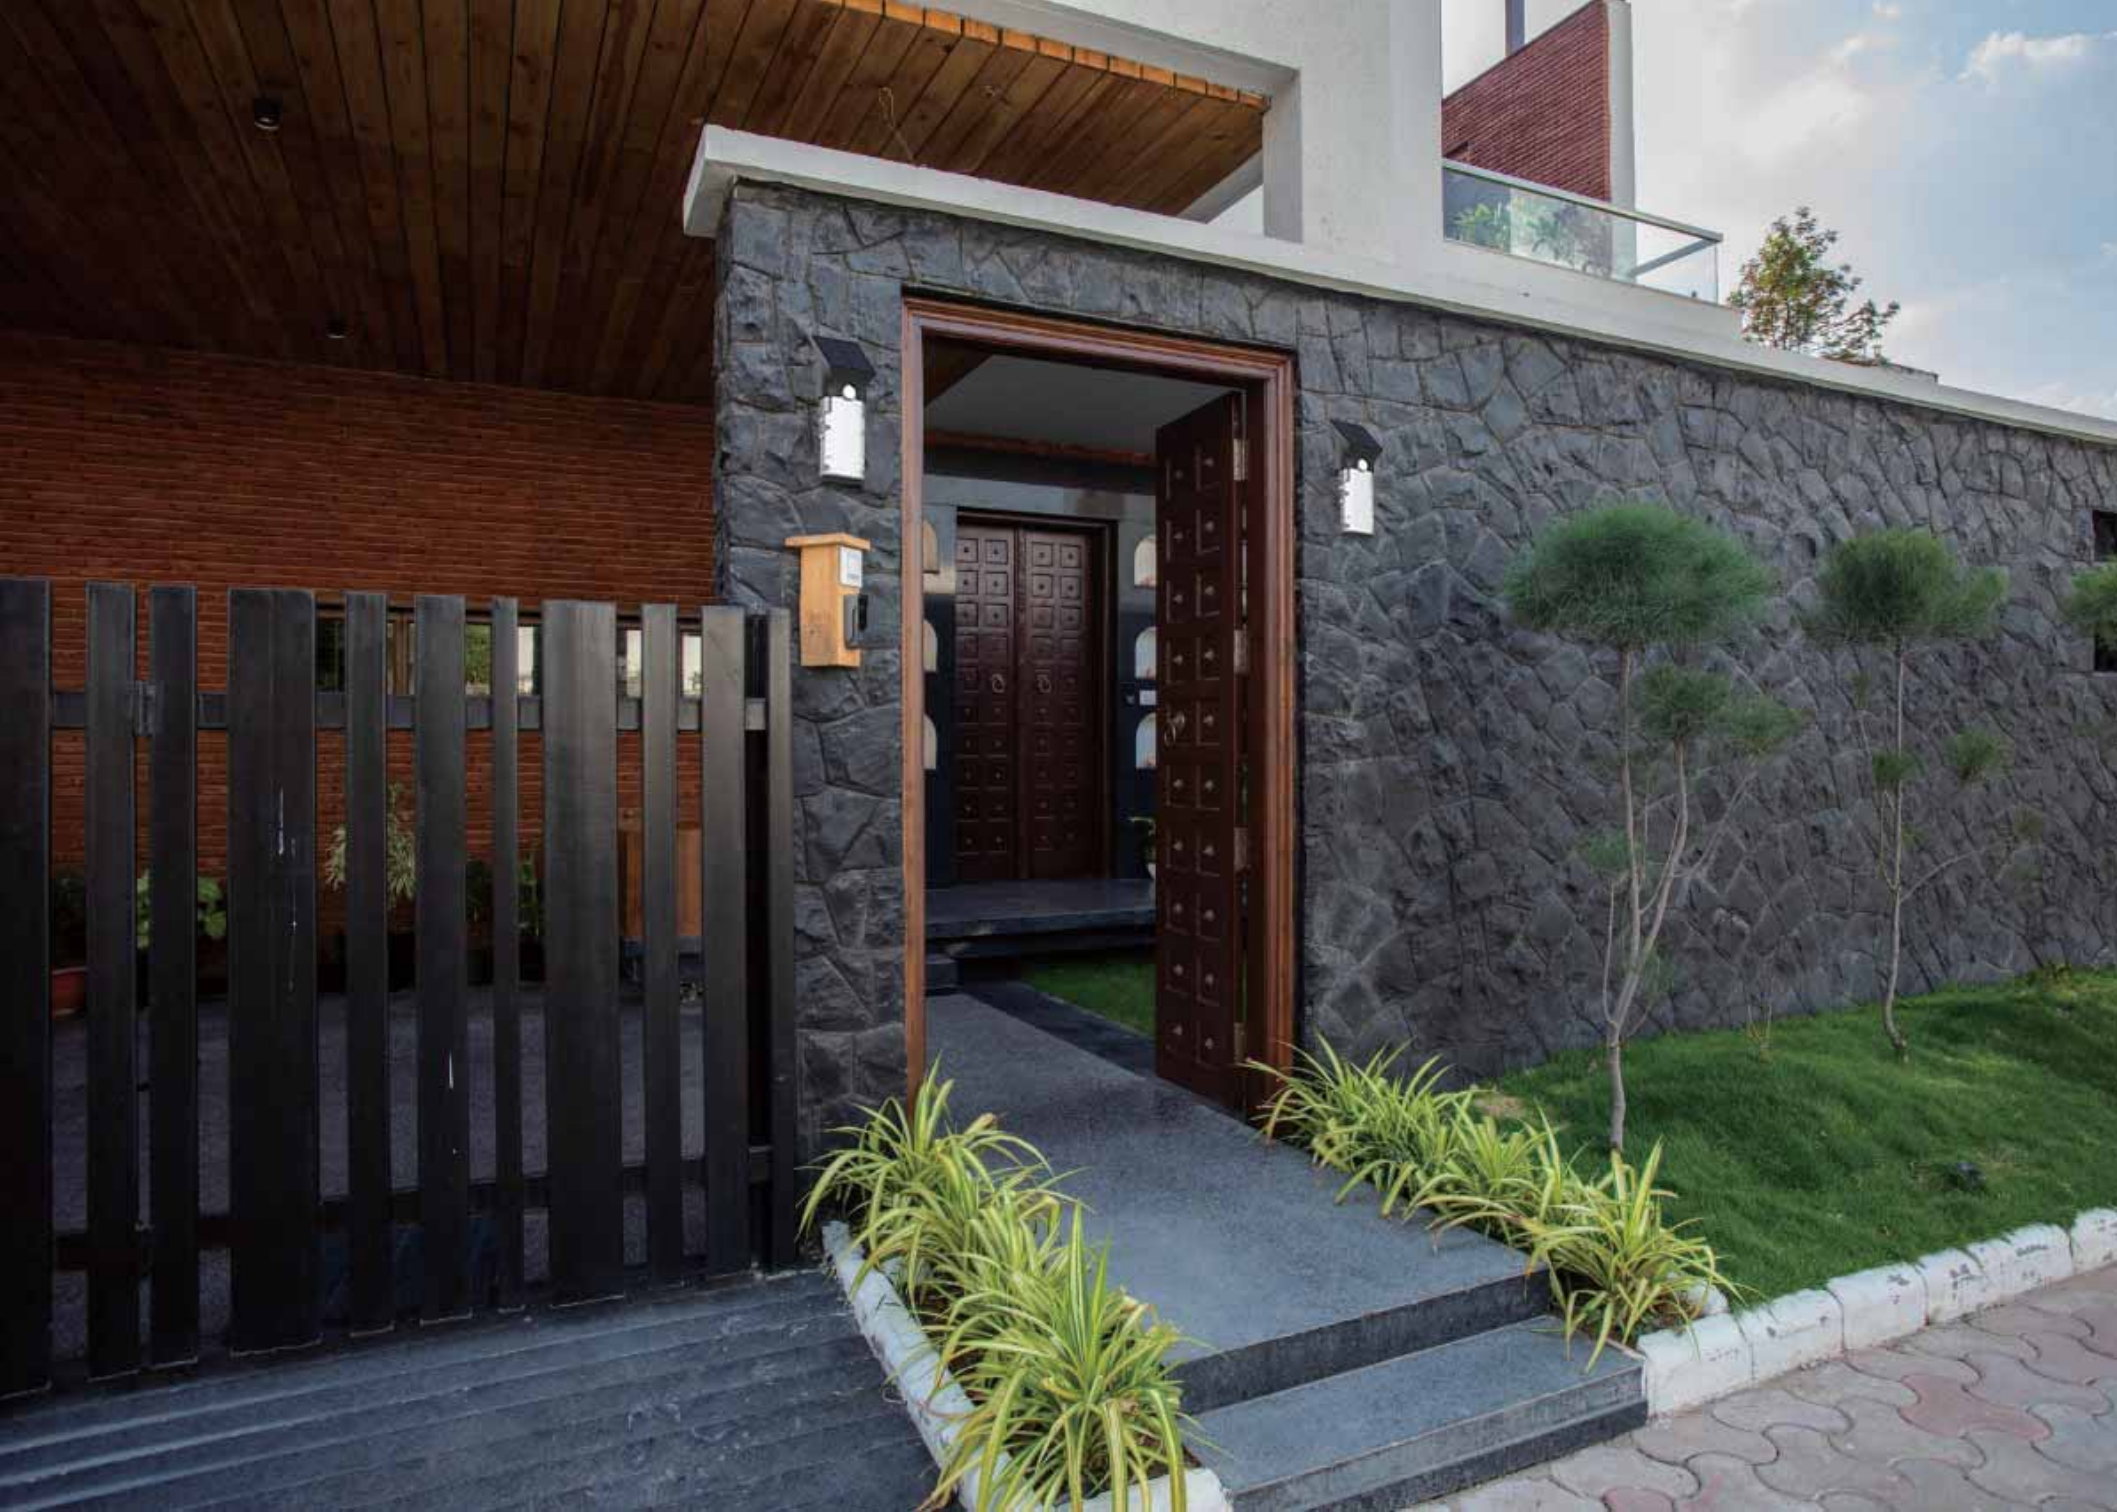

SWL-15PL

More brighter & More durable

2 in 1: PIR wall light/ Portable light

Material: ABS + PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED : 1000Lumens
Core technology: ALS2.3 / TCS 1.0
Warrenty:1 year



Model type	LED power	Colour temperature	mounting height	Luminaire net weight
SWL-15PL	10W	4000K	1.6m	0.5kg





“Solar Garden Light”

PEAR SERIES

Illuminate your secret garden

7+ days continuous lighting even in rainy day
Warm White for lighting & decoration
Material: Die casted Aluminium
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1500+ lifespan
Core technology: ALS 2.3 / TCS 1.0
Warranty: 2years



Model type	LED power	Colour temperature	PIR	Install distance	Luminaire net weight
ESL-15PRO	1W	3000K	No	5m	1.15kg
ESL-25PRO	1W	3000K	No	5m	1.5kg



ESL-15N



ESL-25N

*“Solar
flood
light”*



Amazing in the brightness




Install on the wall


URANUS PRO SERIES

Amazing in the brightness

Remote control the brightness and timer
Battery power indicator
Material: Aluminium alloy+PC
Solar Cell: Poly-crystalline
Battery : Li-ion battery with 1500+ lifespan
LED : 20W/40W/60W
Core technology: ALS 2.3 / TCS 1.0
Warranty: 2 years



Model type	LED power	Colour temperature	mounting height	Install distance	Luminaire net weight
SWL-20PRO	30W	5700K	6m	19m	1.18kg
SWL-40PRO	60W	5700K	10m	26m	2.17kg



DIALUX road simulation map





**AMAZING IN TECHNOLOGY,
AGAIN!**

BEETLES

Solar Wall Light



Sunlight collection cover design for fast charging
3 lighting mode choice
Battery power indicator
PIR motion sensor and Ray sensor
Material: High temperature resistant PC
Solar cell: Mono-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED : 400Lumens
Core technology: ALS2.1 / TCS 1.0 / Sunlight collection
Warranty: 1 year



Model type	LED power	Colour temperature	mounting height	Install distance	Luminaire net weight
SWL-03PRO	25W	6000K	4m	10m	0.65kg





RGB Solar Garden Light


Courtyard, Garden, Park, Street,
Roadway, pathway, Parking Lot, Private
road, Sidewalk, Public square, plaza,
Campus, Airfield, Farm & Ranch,
Perimeter Security, Wildlife area,
Remote Area, Military Base.



URANUS 2

RGB Decoration flood light

Material: Aluminium alloy+PC
Solar Cell: Poly-crystalline
Battery : Li-ion battery with 1500+ lifespan
LED : 40LED, RGB
Core technology: ALS2.1 / TCS 1.0
Warranty: 2 years



Model type	LED power	Luminaire net weight
SLL-22	40LED, RGB	2.0kg






ESL-06K

Best choice for garden decorative project !

3+ days continuous lighting even in rainy day,
Best choice for garden decoration
Material: Die casted Aluminium+PC
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1500+ lifespan
LED : 500Lumens
Core technology: ALS2.1 / TCS 1.0
Warranty: 1year



Model type	LED power	Colour temperature	Luminaire net weight
ESL-06K	0.5W	3000K	0.5kg



Core-value
Respect for personal innovation, establish correct moral concept,
Service and customer-value-oriented to meet different customer needs

Vision
Become the Strongest company in solar energy applications

Mission
Provide good solar products for humans

Solar our life.