



BEETLES

SOLAR WALL LIGHT



INTRODUCTION

Product specifications



01 FRONT COVER

02 CATALOG

03 MAIN
ADVANTAGES

04 SPECIFICATIONS

05 EXPLODED VIEW

06 DIMENTION FIGURE

07 MORE DETAILS

08 CORE
TECHNOLOGY


09 PACKAGE DETAIL

10 APPLICATION



Product Advantage

ALS Technology Guarantees 10 Continuous Working Nights
TCS Technology Ensures Longer Battery Lifespan

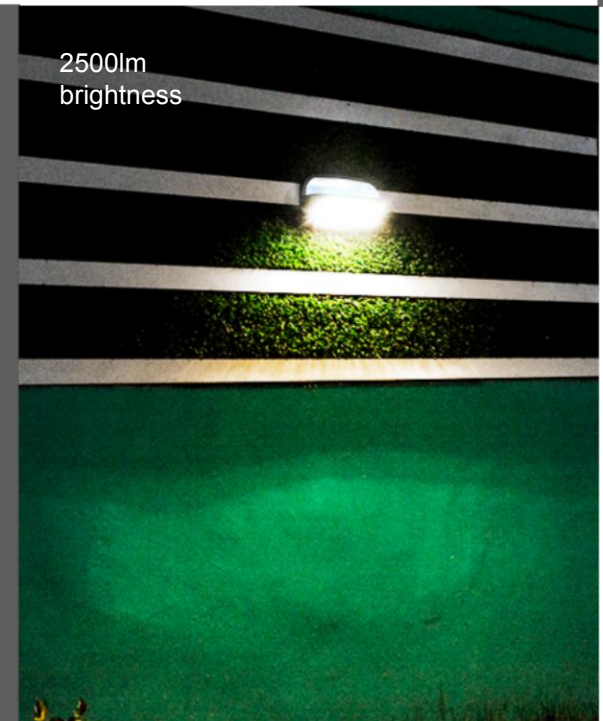

Item : SWL-03PRO		Fixture Power : 2500LM	
Solar panel			
Power	Monocrystalline , 4.8V/1W		
Li-ion battery			
Capacity	3.7V14.8WH 2.0AH/PC		
Charging/Discharging Temp	0~45°C / 0~60°C		
Charging Time	18H		
LED (OSRAM)	2835 50pcs		
Color Temp	4000K , Ra 80+		
Efficiency	190lm/W		
UV LED	-		
Performance			
Lighting Time in Rainyday	>10 days		
Control Mode	Button Switch , ON/OFF Long Press 1.5s		
Lighting Mode	M1 : 50LM+PIR (2500LM) ; M2 : 0LM +PIR (2500LM) ; M3 : 50LM Till Dawn		
Mode Indication	Red LED : M1: One Blink M2: Two Blink M3: Three Blink		
Capacity Indication	-		
PIR	120° 6m		
Core technology	ALS 2.4		
Self-Cleaning Function	-		
IP/IK Class	IP65		
Installation Height			



Solar Panel



Product Shell




Led Plate



Optical Lens





Battery Pack

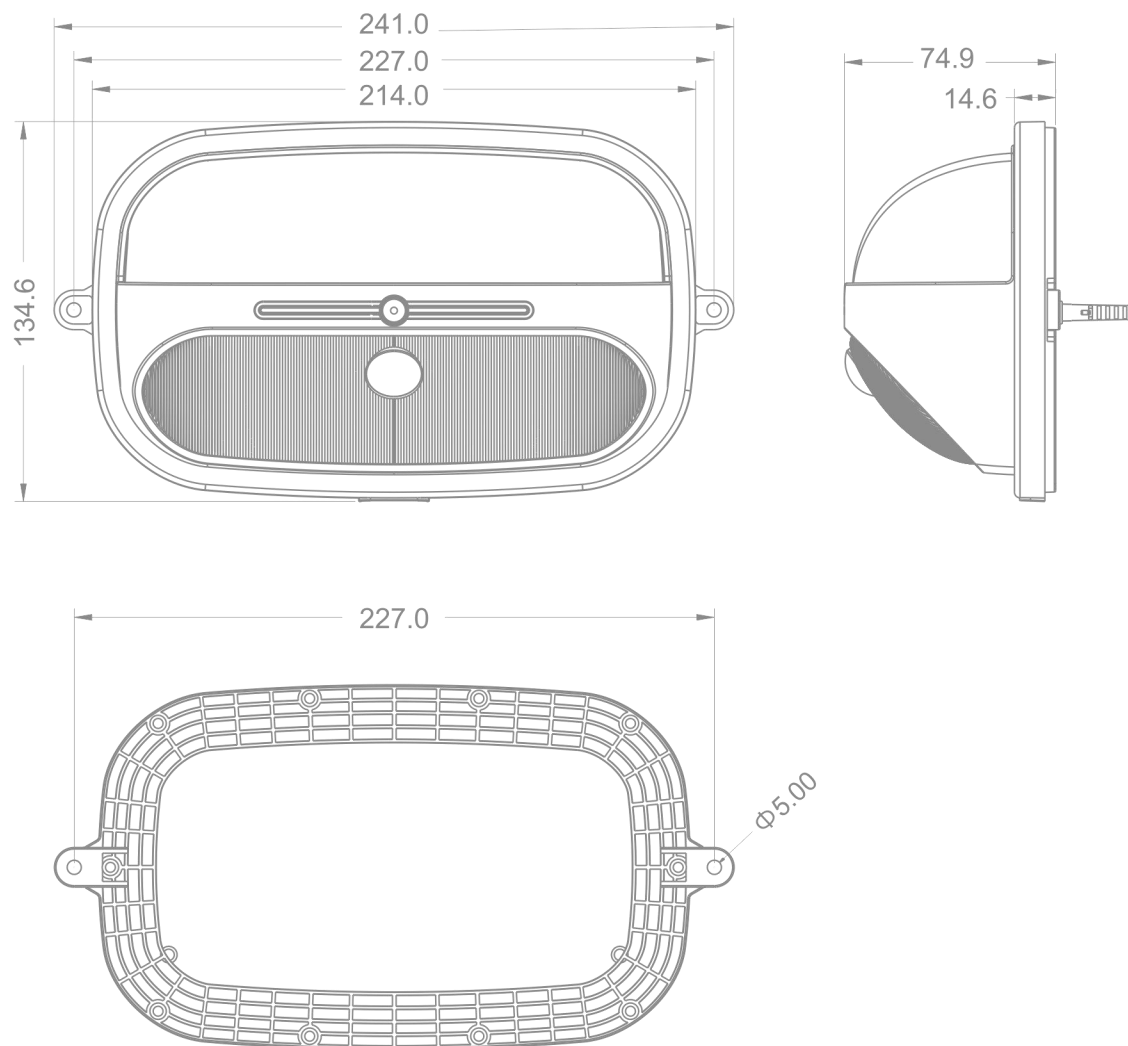

Detail Benefits

- Charging in daytime and lighting from dusk to dawn
- Multi operating modes for choosing
- Sensitive PIR sensor

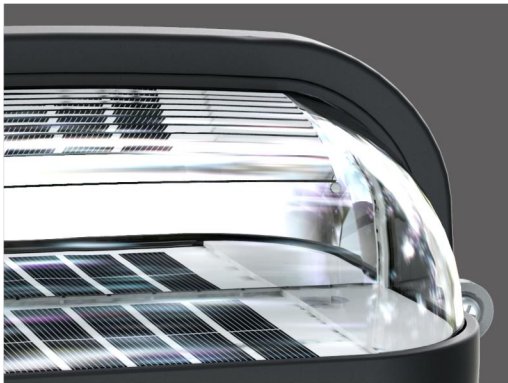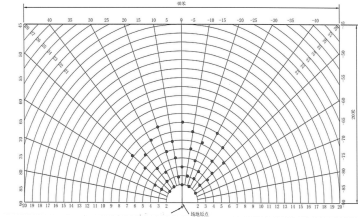

Sunlight collector
Solar Charging Efficiency :>19%




Switch
PIR : > 3m , 120°




Side details




A Great Company should always pay the highest attention to the every detail design , and the craftsmanship spirit should be filled in the whole design process and mass production.

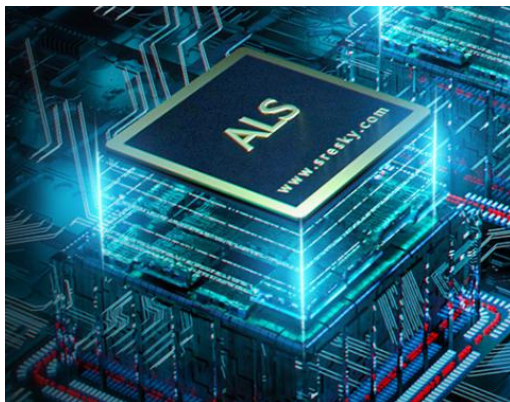


ADVANTAGE OF ALS

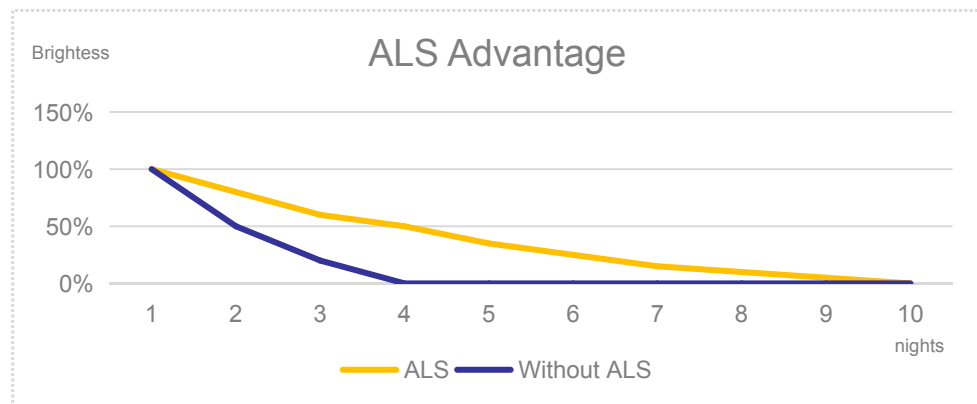

ADVANTAGE OF TCS

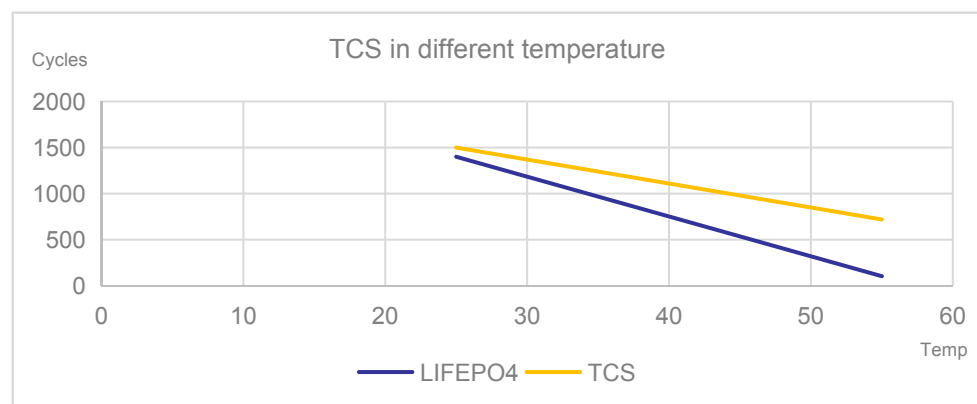

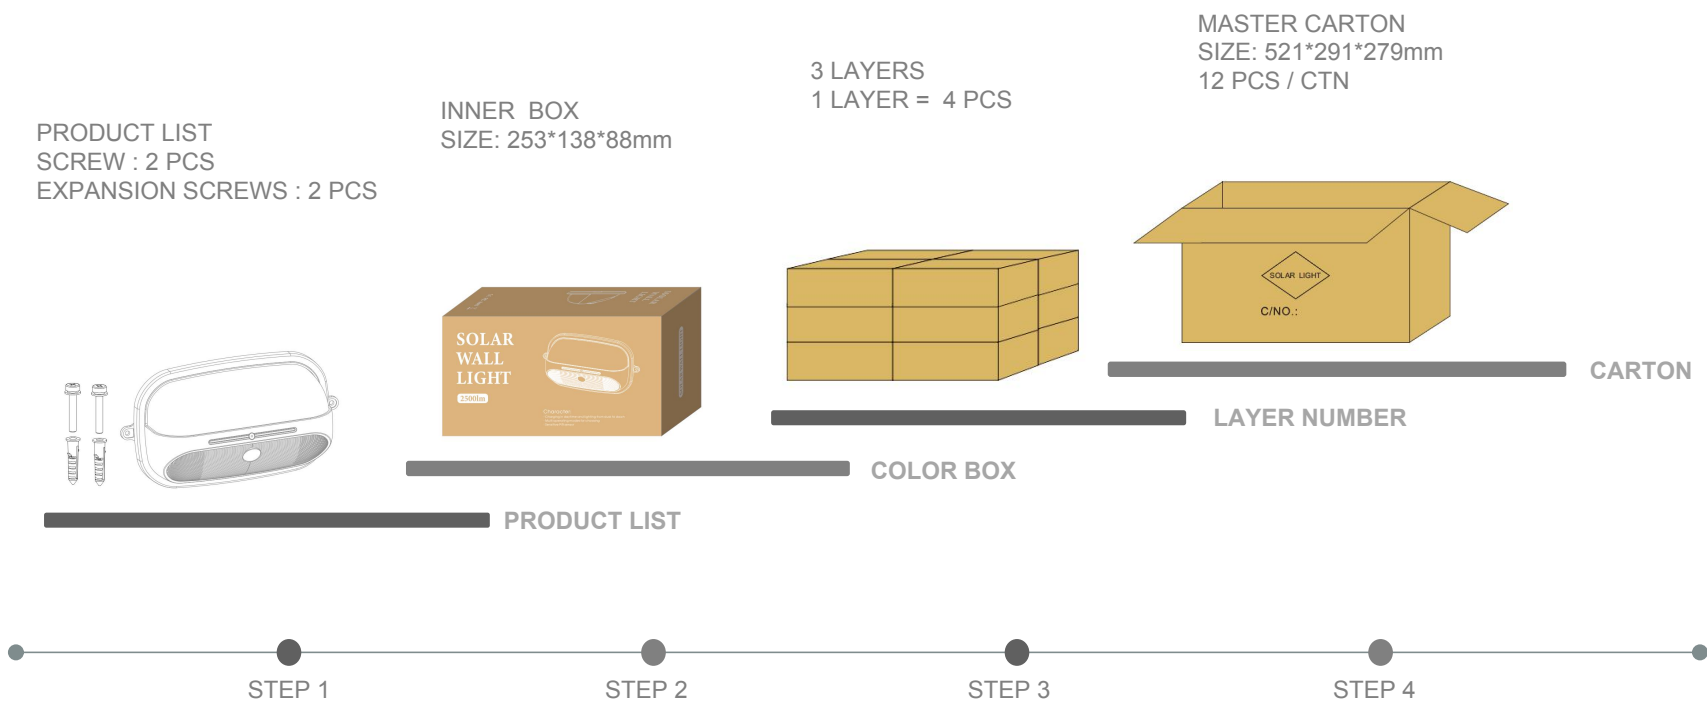

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-03 PRO	INNER BOX	1	1	1	253*138*88	0.52	0.72
	CARTON	12	12	1	521*291*279	6.24	8.64

Net weight and gross weight
are for reference only

S / O / L / A / R / L / I / G / H / T

THANKS
VERY
MUCH

