

Moving
Horizontally



Vertical
Sliding

MARS 2
SOLAR WALL LIGHT



INTRODUCTION

Product specifications

01

FRONT
COVER

02

CATALOG

03

MAIN
ADVANTAGES

04

OTHER
ADVANTAGES

05

SPECIFICATIONS

06

EXPLODED
VIEW

07

OPTICAL
FIGURE

08

DIMENTION
FIGURE

09

MORE DETAILS

10

ADVANTAGES OF
CONTROLLER

11

PACKAGE
DETAIL

12

LAST PAGE



2000LUMENS SUPER BRIGHT
EMERGENCY SOLAR WALL LIGHT


Scientific Light Distribution





Product Advantage

Turn up, down, left and
right light wherever you
want Easy your
installation

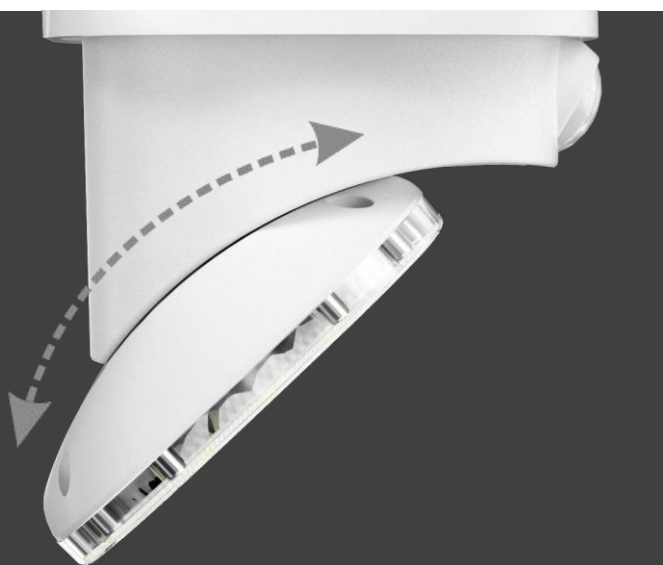

Vertical sliding

**DO AS YOU WISHES,
AMAZING LIKE A MAGIC CUBE.**




Moving Horizontally





Item : SWL-12		Fixture Power : 20W
Solar panel		
Power	Epoxy Mono-Crystalline , 1W	
Li-ion battery		
Capacity	3.7V 14.8WH 2AH/PC	
Charging/Discharging Temp	0~40°C/-20~60°C	
Charging Time	20H	
LED (OSRAM)	2835 39pcs ;	
Color Temp	4000K , Ra 80+	
Efficiency	170lm/W	
UV LED	-	
Performance		
Lighting Time in Rainyday	>10days	
Control Mode	Button Switch , ON/OFF Long Press 1.5s	
Lighting Mode	M1 : 50+PIR (2000 lm) / M2 : 0+PIR (2000 lm) /M3:50lm Till dawn	
Mode Indication	-	
Mode Indication	M1 : Flash for one time , M2 : Flash for two times ; M3 : Flash for three times	
Capacity Indication	-	
PIR	120° , >5m	
Core technology	ALS 2.1 / TCS 1.0	
Solar Panel Autoclean	-	
IP/IK Class	IP65 / IK10	
Install Height	3m	

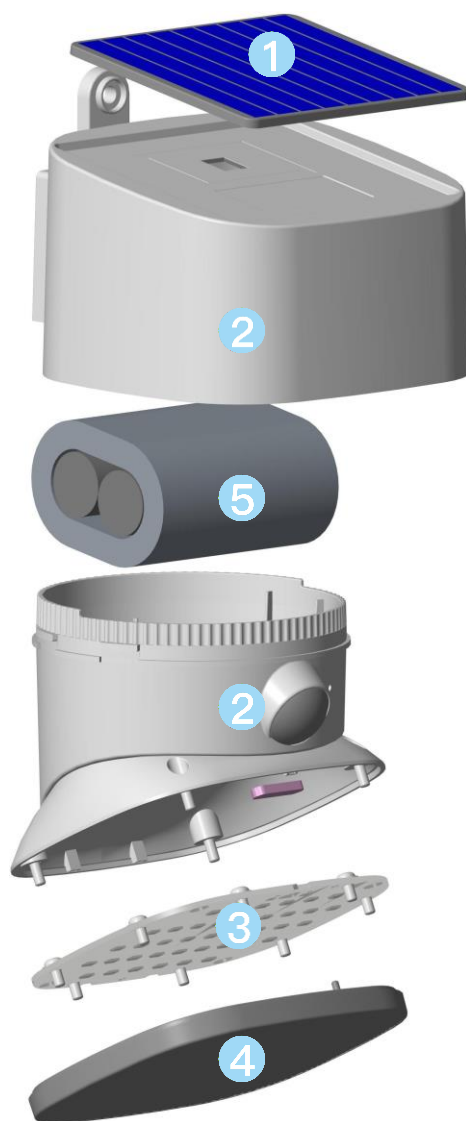

Solar panel



product shell



Led plate




optical lens




battery pack





Road Simulated Diagram



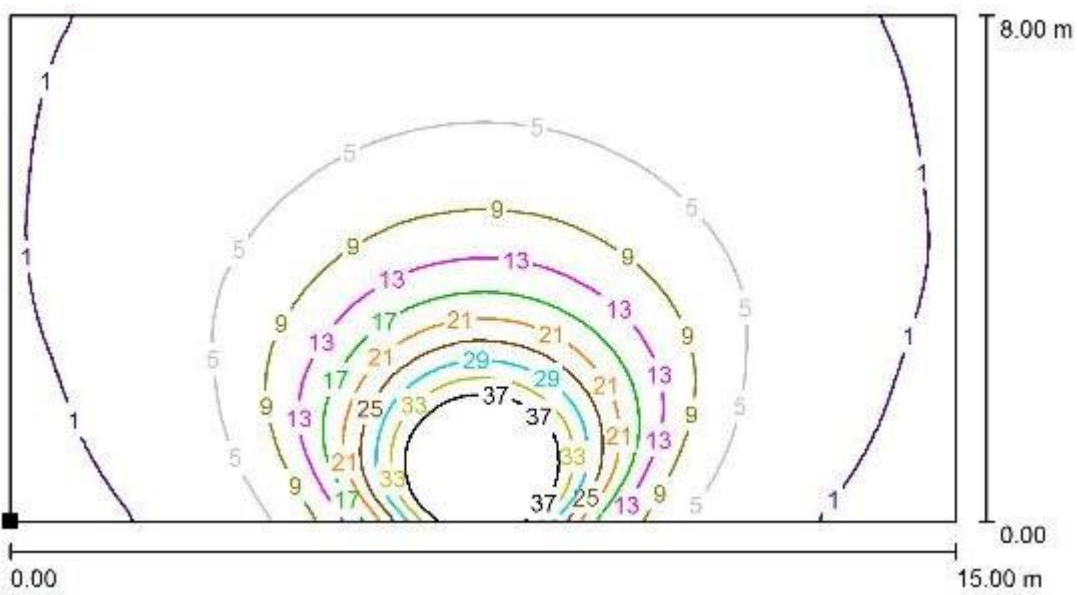


Illumination Curve

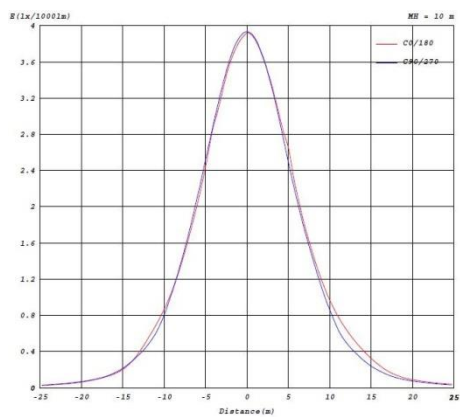


Luminance Distribution

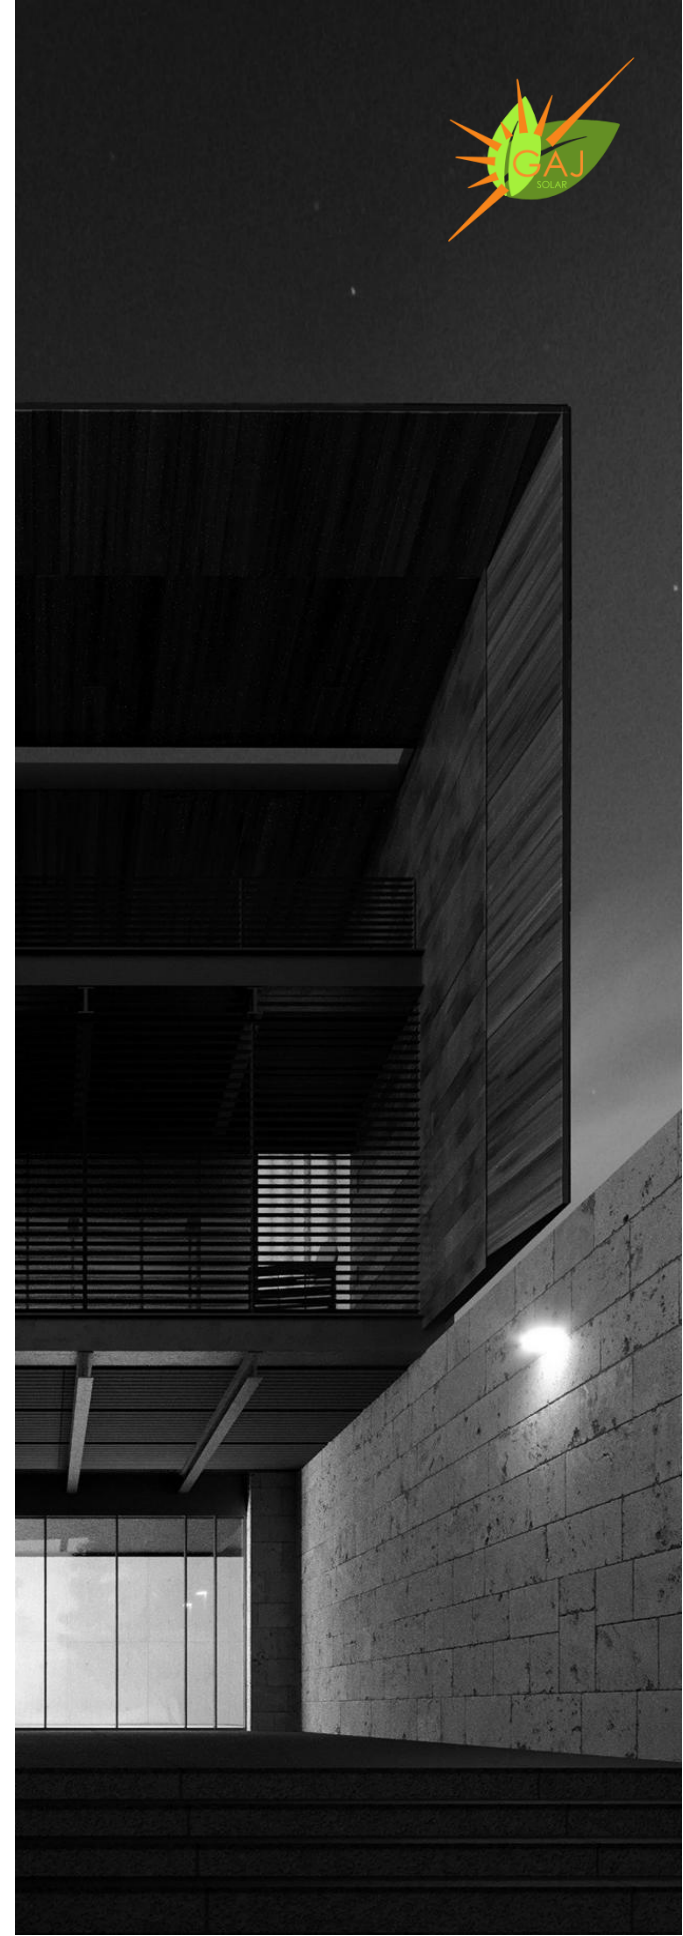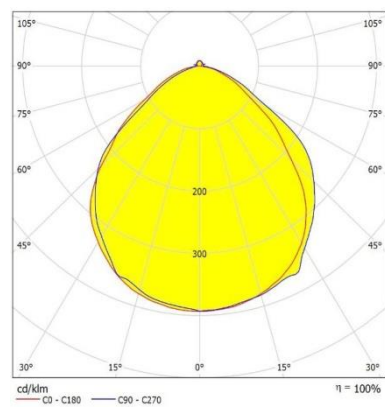

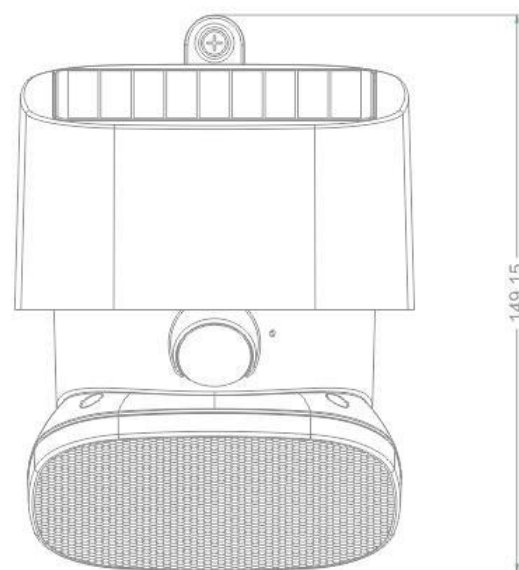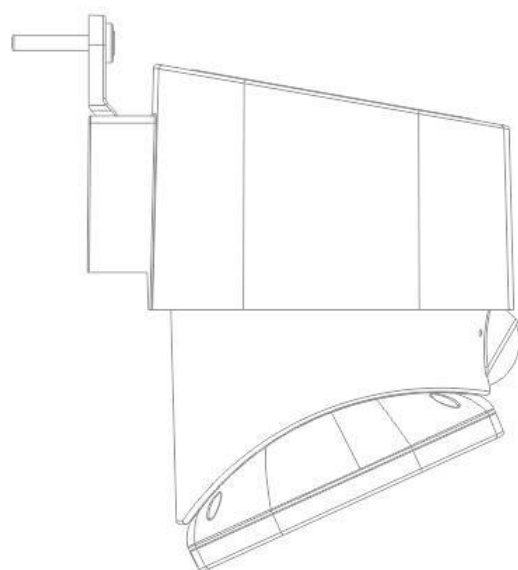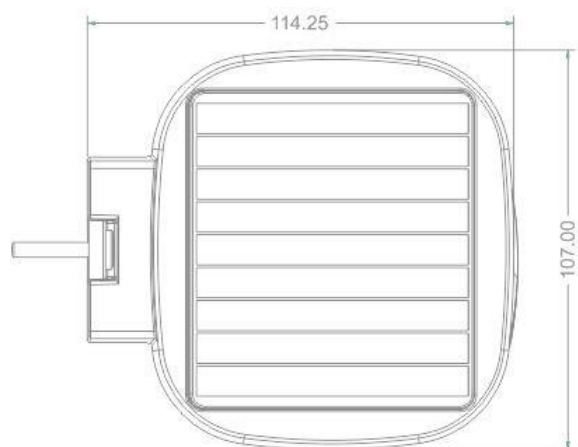




Advantage in every detail

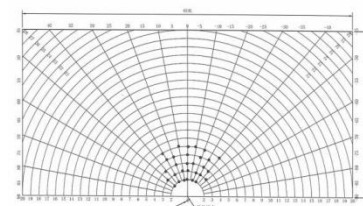

Monocrystalline
Solar Charging Efficiency :>21%

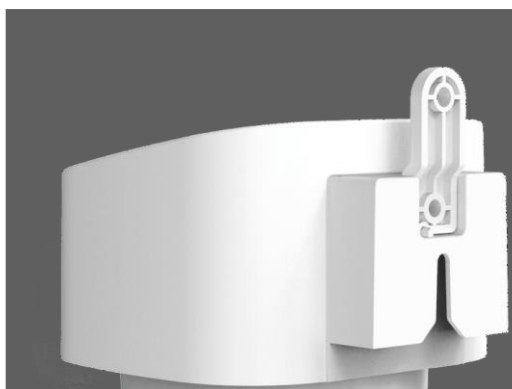


Easy to install




High sensitivity PIR sensor
Switches



Vertical sliding

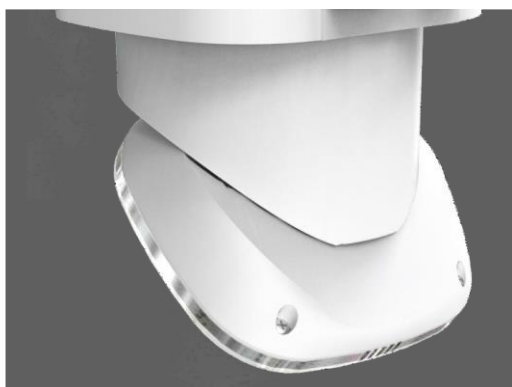


Back details

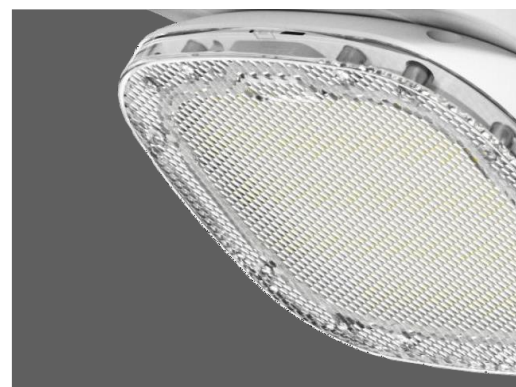


High lumen LEDs
190lm/W



A Great Company should always pay the highest attention to the every detail design , and the craftsmanship spirit should be filled in the whole design process and mass production.

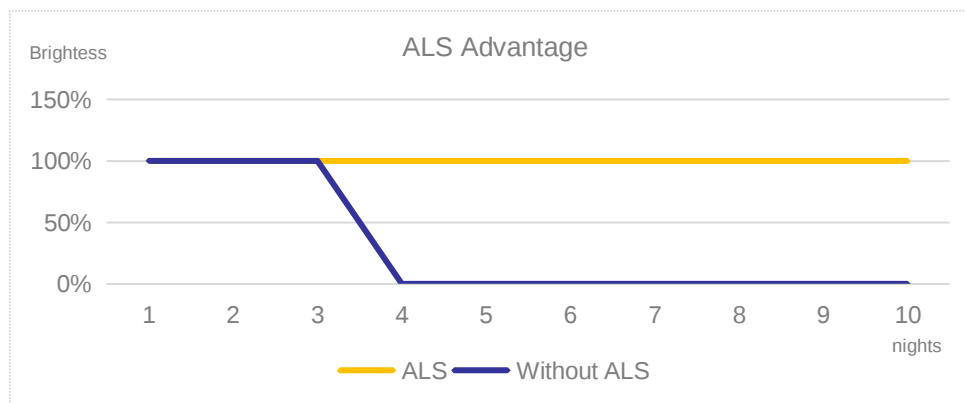


ADVANTAGE OF ALS

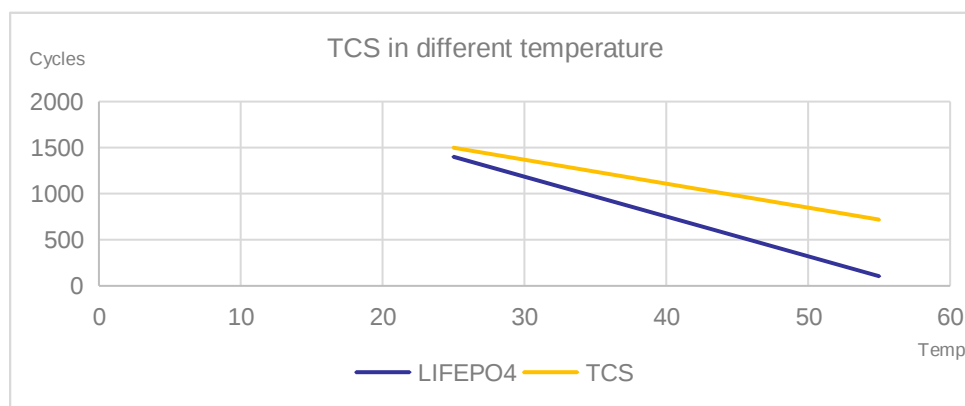

ADVANTAGE OF TCS



PRODUCT LIST
SCREW : 3PCS
EXPANSION SCREWS : 2PCS
ACCESSORIES : 1PC
PIN: 1PC




PRODUCT LIST

INNER COLOR BOX
SIZE: 113*125*140mm
1PCS/1 BOX




COLOR BOX

2 LAYERS
1 LAYER = 12 BOXES



MASTER CARTON
SIZE: 467*387*298mm
24PCS/CTN

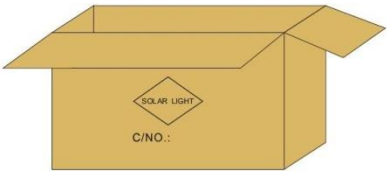

CARTON

LAYER NUMBER

STEP 1

STEP 2

STEP 3

STEP 4

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-12	COLOR BOX	1	1	1	113*125*140	0.5	0.55
	CARTON	24	24	1	467*387*298	12	12.5

Net weight and gross weight
are for reference only

S / O / L / A / R / L / I / G / H / T



THANKS
VERY
MUCH