



Install each lamp 25M between



>>> Solar Light



ATLAS SERIES

Simple, but durable

10+ days continuous lighting even in rainy day
3 lighting modes to fit what you need
Material: Aluminium profile
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1,000+ cycles
Core technology: ALS2.0/TCS
Warrenty: 3years




DIALUX road simulation map






Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-32	20W	6000K	3m	15m	7.55kg
SSL-33	30W	6000K	3m	15m	8.7kg
SSL-34	40W	6000K	4m	15m	10.05kg
SSL-35	50W	6000K	5m	15m	12.55kg
SSL-36	60W	6000K	6m	22m	13.4kg
SSL-37	70W	6000K	7m	28m	15.8kg
SSL-38	80W	6000K	8m	28m	19.4kg
SSL-39	90W	6000K	9m	32m	19.7kg
SSL-310	100W	6000K	10m	32m	20kg



SSL-32~35



SSL-36~310



SSL-32



SSL-33



SSL-34



SSL-35




SSL-36




SSL-37



SSL-38



SSL-39




SSL-310



CLASSIC SERIES
The real thing

10+ days continuous lighting even in rainy day
 Remote controller with 32 lighting modes
 6+ years continuous selling in global market
 Material: Die casted Aluminium
 Solar cell: Poly-crystalline
 Battery: Li-ion battery with 1,000+ cycles
 Core technology: ALS2.0/TCS
 Warrenty: 3years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-01N	10W	6000K	2.5m	5m	4.5kg
SSL-02N	20W	6000K	3m	9m	7kg
SSL-03N	30W	6000K	4m	11m	10kg
SSL-04N	50W	6000K	6m	16m	16kg
SSL-05N	80W	6000K	8m	21m	18.5kg


DIALUX road simulation map





ARGES SERIES
CLASSIC update


10+ days continuous lighting even in rainy day
 Classic-pro with professional LENS and brighter lighting
 Material: Die casted Aluminium
 Solar cell: Poly-crystalline
 Battery: Li-ion battery with 1,000+ cycles
 Core technology: ALS2.0/TCS
 Warrenty: 3years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-06N	30W	6000K	3m	12m	7.5kg
SSL-07N	45W	6000K	5m	15m	10kg
SSL-08N	60W	6000K	6m	22m	12.5kg
SSL-09N	100W	6000K	8m	24m	13.5kg


DIALUX road simulation map



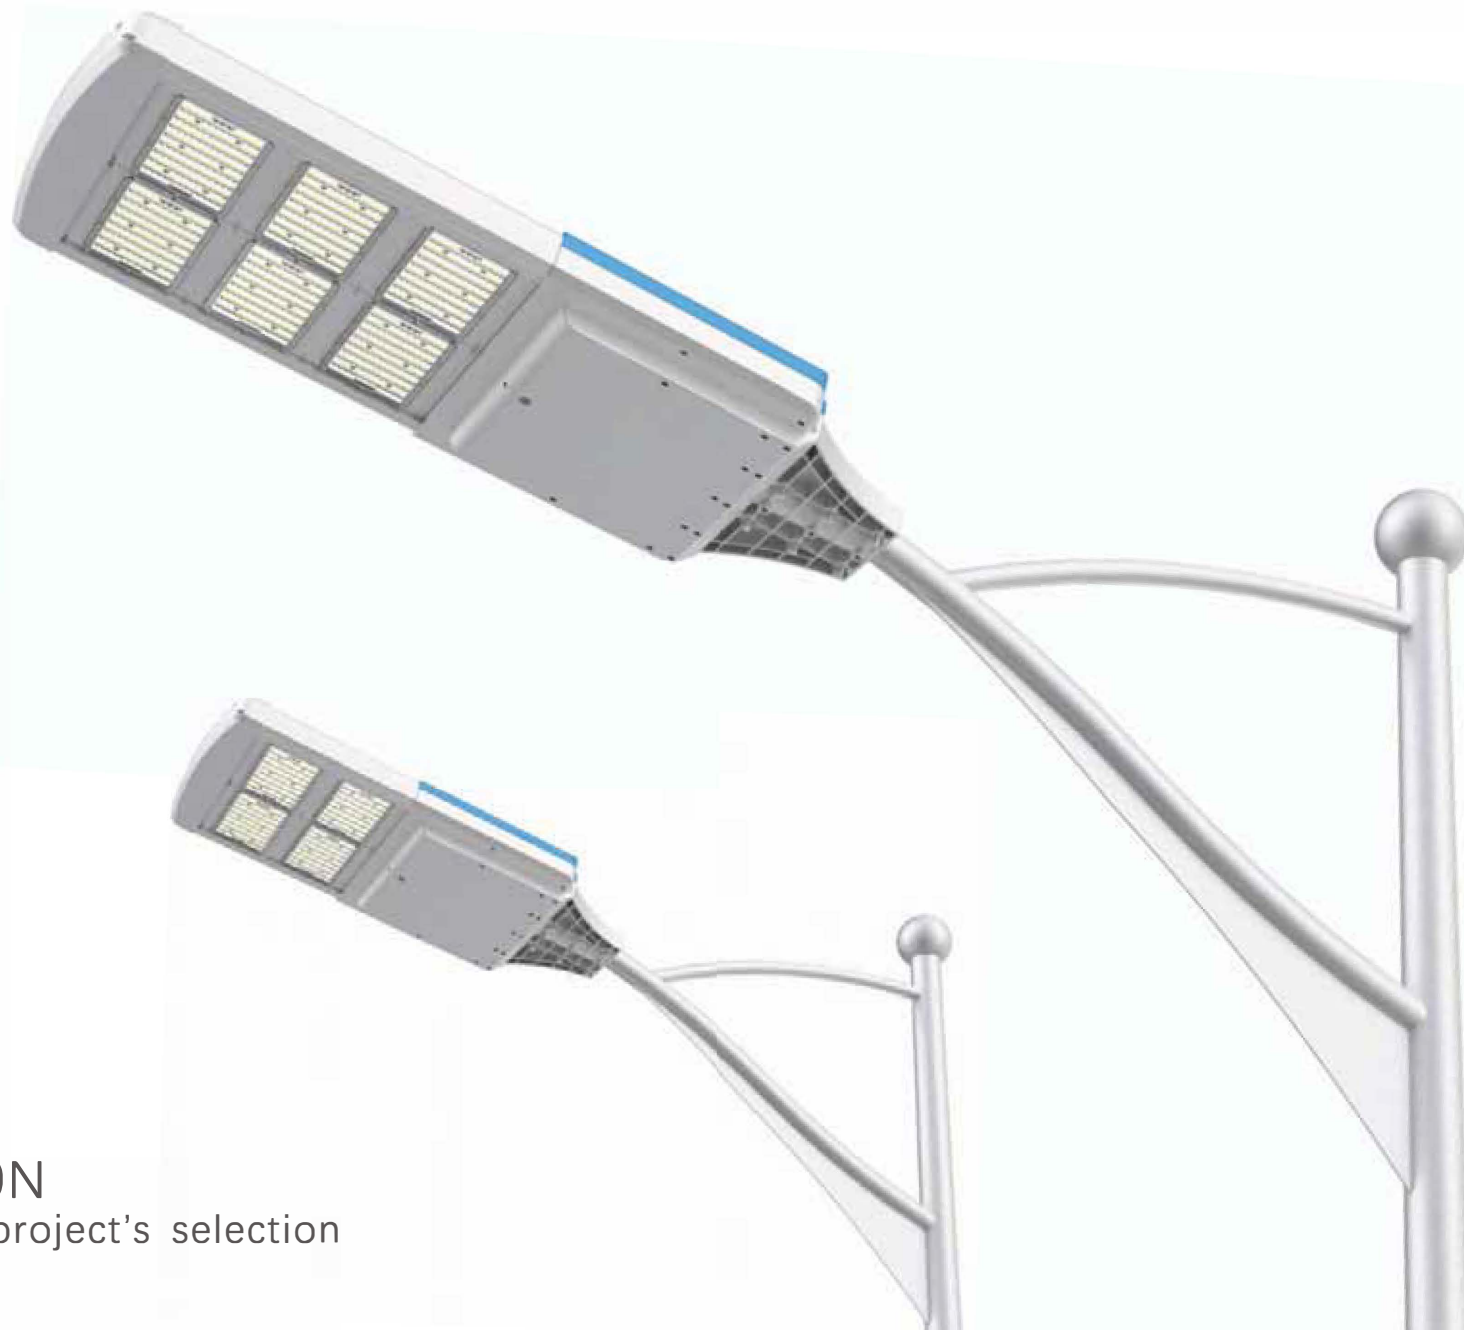

ESL-20N/30N/40N

5+ years government project's selection





TITAN SERIES

Right choice for government project

10+ days continuous lighting even in rainy day
Remote controller with 10 lighting modes
Bright beyond imagination
Material: Aluminium profile
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1,000+ cycles
Core technology: ALS2.0/TCS
Warrenty: 3years




DIALUX road simulation map





Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SSL-22	20W	6000K	3m	15m	22.9kg
SSL-23	30W	6000K	4m	10m	26.9kg
SSL-24	40W	6000K	5m	20m	31.4kg
SSL-25	50W	6000K	6m	24m	38.7kg
SSL-26	60W	6000K	7m	24m	41.7kg
SSL-27	70W	6000K	8m	27m	46.3kg
SSL-28	80W	6000K	8m	30m	49.7kg



SSL-22



SSL-23



SSL-24



SSL-25



SSL-26



SSL-27



SSL-28




Install on the wall

Amazing in perfect use


URANUS SERIES

Amazing in perfect use


Left power gauge by LED indicator
Indoor and outdoor free using
Remote control with more function
Material: Aluminium profile
Solar cell: Poly-crystalline
Battery: Li-ion battery with 500 cycles
Core technology: ALS2.0/TCS
Warrenty: 1years

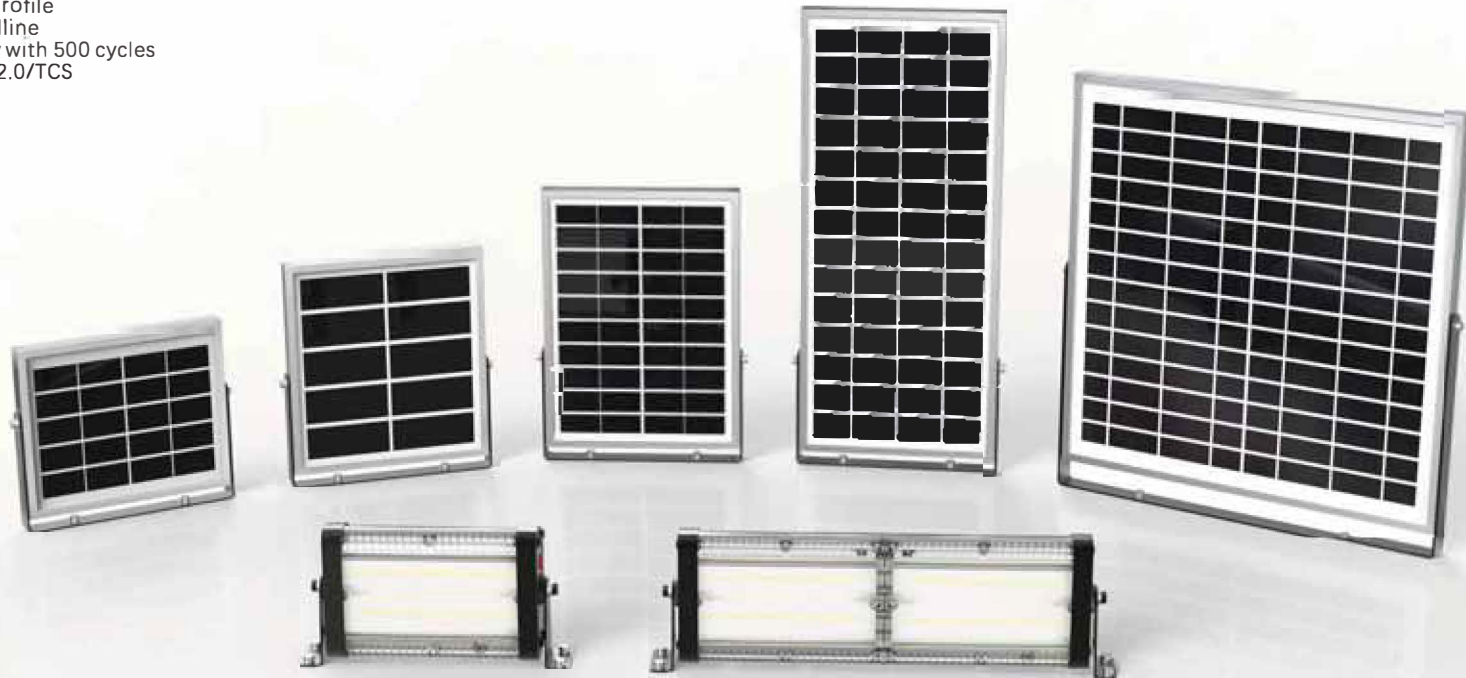

Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SWL-10	10W	6000K	4m	12m	1kg
SWL-20	20W	6000K	5m	15m	1.1kg
SWL-30	30W	6000K	6m	19m	1.18kg
SWL-40	40W	6000K	10m	26m	2.17kg
SWL-50	50W	6000K	12m	30m	2.7kg



DIALUX road simulation map





SML-04T

Never stop lighting

10+ days continuous lighting even in rainy day,
Sensitive PIR sensor, Easy install and using by separated
solar panel and remote control

Material: Die casted Aluminium

Solar cell: Poly-crystalline

Battery: Li-ion battery with 1,000 cycles

Core technology: ALS2.0/TCS

Warrenty: 1years



CE FC RoHS

Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SML-01T	10W	6000K	3m	9m	2.13kg

SML-04N

Never stop lighting

10+ days continuous lighting even in rainy day,
 Sensitive PIR sensor, Easy install by seperated solar panel
 Material: Die casted Aluminium
 Solar cell: Poly-crystalline
 Battery: Li-ion battery with 1,000 cycles
 Core technology: ALS2.0/TCS
 Warrenty: 1years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SML-04	10W	6000K	3m	9m	2.13kg



Solar decorative light

Courtyard, Garden, Park, Street,
Roadway, pathway, Parking Lot, Private
road, Sidewalk, Public square, plaza,
Campus, Airfield, Farm & Ranch,
Perimeter Security, Wildlife area,
Remote Area, Military Base.



RGB outdoor LED lighting with 7 colors, 9 color changing modes for choosing

SLL-02N

Solar decorative Light

RGB outdoor LED lighting with 7 colors,
9 color changing modes for choosing
Material: Die casted Aluminium
Solar cell: Poly-crystalline
Battery: Li-ion battery with 500 cycles
Core technology: ALS2.0/TCS
Warrenty: 1years



Model type	LED power	Colour temperature	Luminaire net weight
SLL-02N	3W	6000K	2.73kg



AMAZING IN TECHNOLOGY,

AGAIN!

BEETLES

Solar Yard Light



Left lighting days showing by LEDs indicator
10+ days continuous lighting even in rainy day
Small body, Big power
Material: Plastic
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1,000+ cycles
Core technology: ALS2.0/TCS/sunlight collecting technology
Warrenty: 1years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SWL-03	4W	6000K	4m	10m	0.65kg





Fell it's brightness..





PEARL SERIES

Illuminate your secret garden

7+ days continuous lighting even in rainy day

SGL series with PIR sensor

Material: Die casted Aluminium

Solar cell: Poly-crystalline

Battery: Li-ion battery with 1,000+ cycles

Core technology: ALS2.0/TCS

Warrenty: 1years



ESL-15N



SGL-01N



SGL-03N



SGL-04N



ESL-25N



SGL-02N

7+ days continuous lighting even in rainy day
 SGL series with PIR sensor
 Material: Die casted Aluminium
 Solar cell: Poly-crystalline
 Battery: Li-ion battery with 1,000+ cycles
 Core technology: ALS2.0/TCS
 Warrenty: 1years



Model type	LED power	Colour temperature	PIR	installing distance	Luminaire net weight
ESL-15N	1W	3000K	No	5m	1kg
ESL-25N	4W	3000K	No	5m	1.5kg
SGL-01N	1W	3000K	No	5m	1.75kg
SGL-02N	4W	3000K	Yes	5m	2.33kg
SGL-03N	4W	3000K	Yes	5m	2.07kg
SGL-04N	4W	3000K	Yes	5m	2.1kg





SDL-02N

Illuminate your secret garden


Material: Die casted Aluminium

Solar cell: Poly-crystalline

Battery: Li-ion battery with 1,000+ cycles

Core technology: ALS2.0/TCS

Warrenty: 1years




Model type	LED power	Colour temperature	installing distance	Luminaire net weight
SDL-02N	20Lumens	3000K	5m	0.6kg





UFO SERIES

Simple, the best view



SLL-12N



SLL-14N



SLL-16N

10+ days continuous lighting even in rainy day
 Remote control with 32 lighting modes
 360 ° lighting
 Material: Die casted Aluminium
 Solar cell: Poly-crystalline
 Battery: Li-ion battery with 1,000+ cycles
 Core technology: ALS2.0/TCS
 Warrenty: 2years



Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SLL-12N	20W	6000K	3m	10m	6kg
SLL-14N	30W	6000K	4m	14m	15kg
SLL-16N	50W	6000K	6m	18m	27kg

DIALUX road simulation map





WahaJ

HONOR SERIES

Back to 18th century

7+ days continuous lighting even in rainy day

2 PIR sensors to cover large area

Build-in solar panel for keeping original appearance

Material: Die casted Aluminium

Solar cell: Poly-crystalline

Battery: Li-ion battery with 1,000+ cycles

Core technology: ALS2.0/TCS

Warrenty: 2years

DIALUX road simulation map



SLL-10N



SLL-11N



SLL-21N

Back to 18th century





You are right! It's solar light with invisible solar panel!



HONOR SERIES

Back to 18th century

7+ days continuous lighting even in rainy day

2 PIR sensors to cover large area

Build-in solar panel for keeping original appearance

Material: Die casted Aluminium

Solar cell: Poly-crystalline

Battery: Li-ion battery with 1,000+ cycles

Core technology: ALS2.0/TCS

Warrenty: 2years



CE FC RoHS

Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SLL-21N	20W	6000K	3m	14m	7.2kg

SLL-21N



CE FC RoHS

Model type	LED power	Colour temperature	mounting height	installing distance	Luminaire net weight
SLL-10N	20W	6000K	3m	14m	6.9kg
SLL-11N	20W	6000K	3m	14m	6.7kg



SLL-11N



SLL-10N



SLL-08N/17N

Solar wall wash light-0.5m/1m

Advertising your advertisement!




SLL-17N



SLL-08N

SLL-08N-17N

Solar wall wash light-0.5m/1m



Professional wall wash LENS design, 2 lighting modes to fit your need, Adjustable angle for different using


Material: Aluminium profile

Solar cell: Poly-crystalline

Battery: Li-ion battery with 1,000 cycles

Core technology: ALS2.0/TCS

Warrenty: 1years



Model type	LED power	Colour temperature	installing distance	Luminaire net weight
SLL-08N	3W	6000K	2m	1.7kg
SLL-17N	6W	6000K	3m	3.3kg



DIALUX road simulation map



SWL-01N

It's different

7+ days continuous lighting even in rainy day. Sensitive PIR sensor,
2 lighting modes to fit what you need
Material: Plastic & Aluminium
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1,000 cycles
Core technology: ALS2.0/TCS
Warrenty: 1years



Model type	LED power	Colour temperature	Luminaire net weight
SWL-01N	10W	6000K	1.5kg



SWL-02N

7+ days continuous lighting even in rainy day, Sensitive PIR sensor,
2 lighting modes to fit what you need
Material: Plastic & Aluminium
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1,000 cycles
Core technology: ALS2.0/TCS
Warrenty: 1years



Model type	LED power	Colour temperature	Luminaire net weight
SWL-01N	10W	6000K	1.5kg



SML-02N

7+ days continuous lighting even in rainy day, Sensitive PIR sensor,

2 lighting modes to fit what you need

Material: Plastic & Aluminium

Solar cell: Poly-crystalline

Battery: Li-ion battery with 1,000 cycles

Core technology: ALS2.0/TCS

Warrenty: 1years



Model type	LED power	Colour temperature	Luminaire net weight
SWL-01N	10W	6000K	1.5kg



ESL-06K


Best choice for garden decorative project !

3+ days continuous lighting even in rainy day,
 Unique aluminium solar step light in market
 Material: Die casted Aluminium
 Solar cell: Poly-crystalline
 Battery: Li-ion battery with 1,000 cycles
 Core technology: ALS2.0/TCS
 Warrenty: 1years



Model type	LED power	Colour temperature	Luminaire net weight
ESL-06K	0.5W	6000K	0.5kg



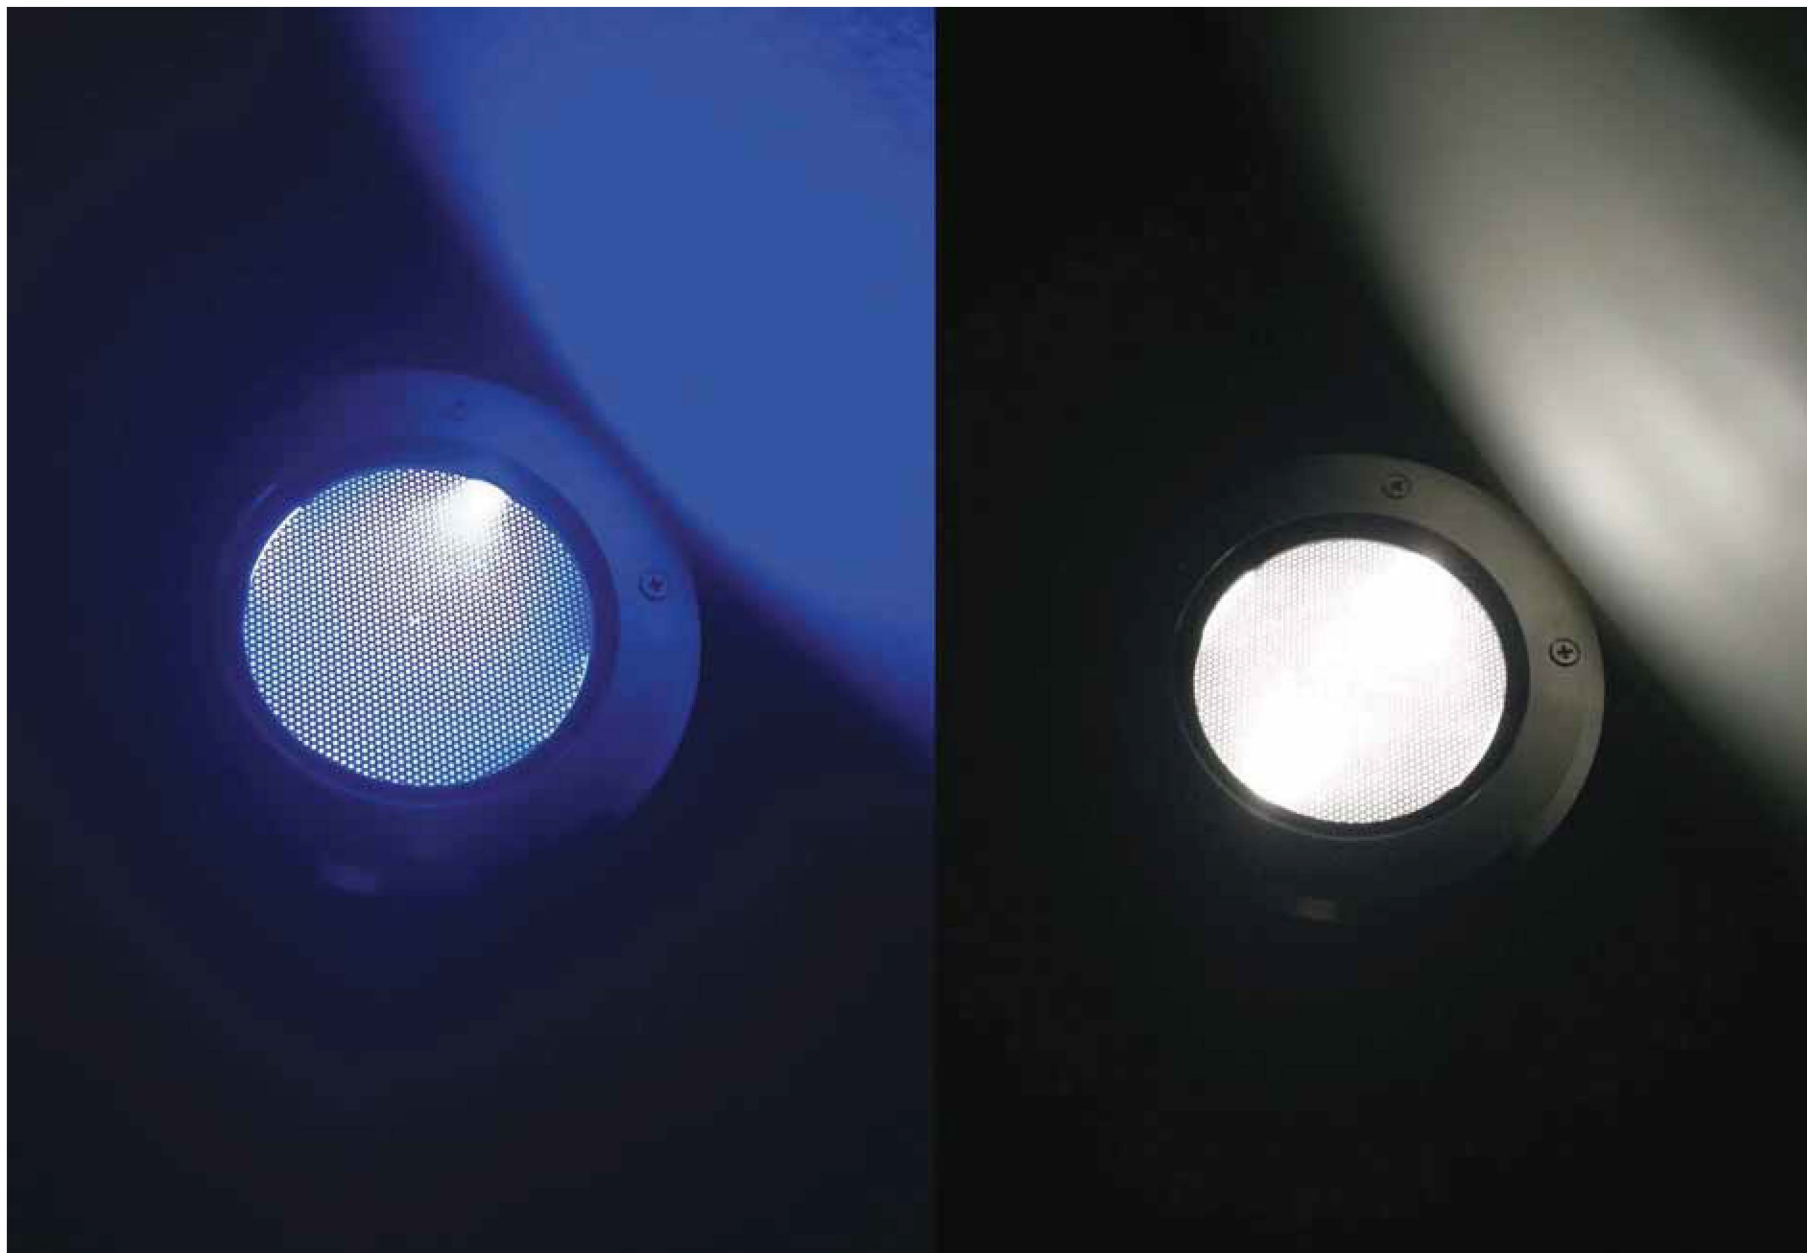

Plaza, Park, Garden, Street, Walkway, Bank of swimming pool etc.

SLL-05N

Solar colorful underground light

Soft lighting by LED panel light,
Standard size for easy installation,
White and blue color changing
when people go through
Size: $\Phi 170 \times 55 \text{mm}$

SLL-15N

Solar underground light

Soft lighting by LED panel light,
Standard size for easy installation
Size: $\Phi 170 \times 55 \text{mm}$

ESL-01

Solar underground light

Soft lighting by LED panel light,
Standard size for easy installation
Size: $\Phi 128 \times 58 \text{mm}$



Model type	LED power	Colour temperature	Luminaire net weight
SLL-05N	0.3W	6000K	1.16kg
SLL-15N	0.3W	6000K	1.16kg
ESL-01	0.2W	6000K	0.58kg

Material: Die casted Aluminium
Solar cell: Poly-crystalline
Battery: Li-ion battery with 1,000 cycles
Core technology: ALS2.0/TCS
Warrenty: 1years





GAJ SOLAR

Suite#3410, Citadel ToWer,
Business Bay, Dubai, UAE,

E: bj@gaj.solar; M: +971-56-1111309; T: +971-4-3380789; WWW.GAJ.solar