


Model 4RTBT

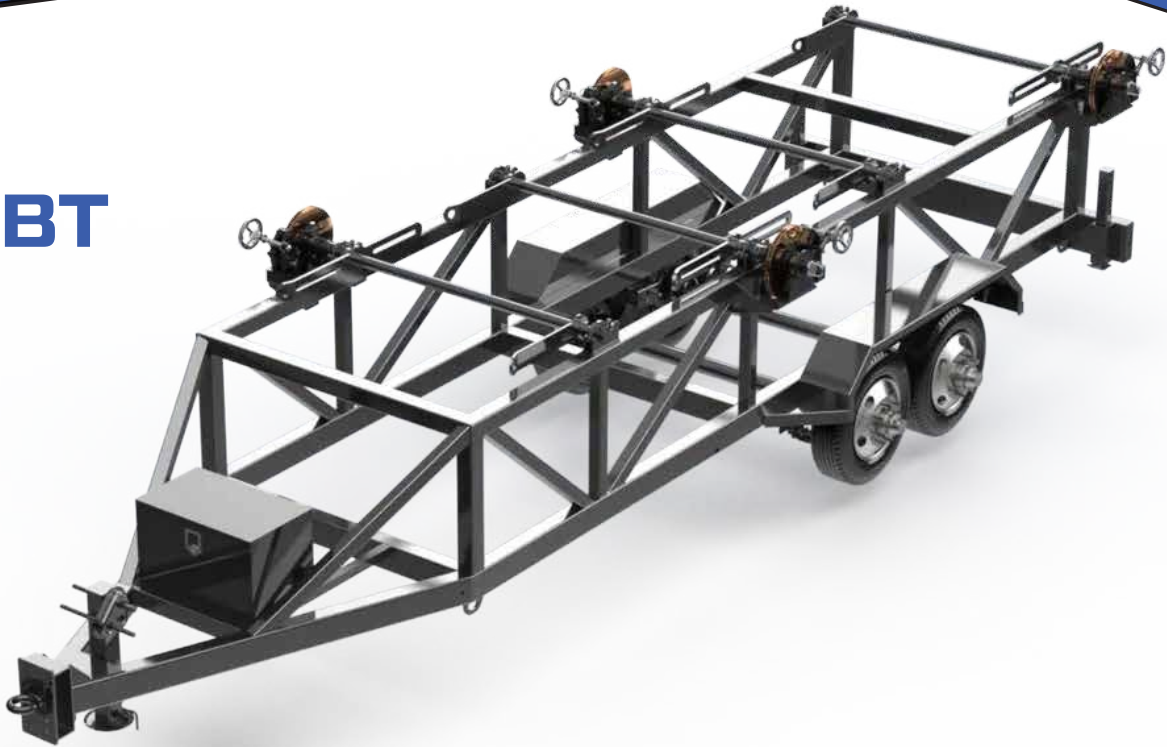

4 REEL TRAILER/BRAKE TENSIONER

SPECIFICATIONS

Length: 27'

Width: 99" OAW

Height: 7' 2"

Running Gear: Two 8,000 lb. single wheel axle with oil bath hubs

Brakes: 12 3/4" x 5" electric with self-charging break-away system

Landing Gear: 12,000 lb. static drop leg jack

Rear Jacks: Manual pin type

Wheels: 16" 8-hole Steel

Tires: 235/80R 16" 14-Ply

Frame: 6x4x3/16 with 4x4x3/16 posts and 3x3x3/16 diagonal rectangular tubing

Coupling System: 42,000 lb capacity x 2 1/2" pintle eye, adjustable in 2 1/4" increments

Lights: Sealed beam with waterproof wiring in nylon tubing

G.V.W.R.: 18,240 lbs.

Empty Weight: 5000 lbs.

Payload: Approximately 13,240 lbs.

CAPACITY

Quantity: Four

Max. Reel Diameter: 48"

Max. Reel Width: 58"

Max. Reel Weight: 3,300 lbs. (each)

Quantity: Three

Max. Reel Diameter: 72"

Max. Reel Width: 58"

Max. Reel Weight: 4,400 lbs. (each)

Spindle Diameter: 2 7/16" w/ locking collars

Reel Brakes: Manually actuated caliper 16" diameter Disc

Reel Loading: Quick change type without adjusting reel brake assembly