

Resetting the ENS900i to Factory Default Settings

Instructions for IP Communications (Cabled Ethernet):

1. Disconnect the main power connection.
2. Disconnect the Ethernet Cable
3. Using a paperclip or tweezers, short the on/off pin on the PCB. Wait 10 seconds while connected
4. Remove the shorting tool (paperclip or tweezers)
5. The ENS900i will perform a series of adjustments and reset to factory settings
6. You may now begin the programming steps as found in the user guide.

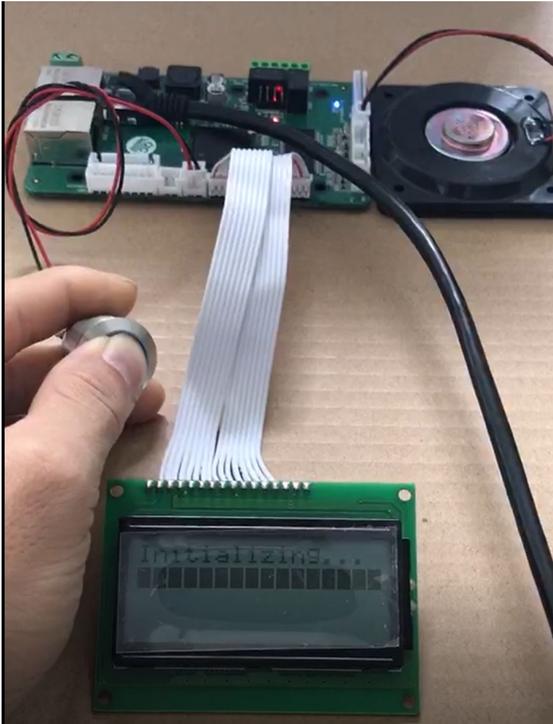


IMAGE: Two Pin Short using a push button as an example

Instructions for VoLTE (cellular 4G connections):

1. Send a text message to the device 555-555-5555 with the following code: **9999#99#**
2. The ENS900i will perform a series of adjustments and reset to factory settings
3. You may now begin the programming steps as found in the user guide.

Note: If SMS text messaging is unresponsive, you may complete steps 1-6 of the IP Communications process to reset the ENS900i to factory default settings.