



### **10 Ton Tag-A-Long Deck-Over Equipment Trailer**

**Model:** 8.525T10TT

**GVWR:** 22,000 lbs. (estimated weight – 6,500 lbs.)

**Load capacity:** 15,500 lbs.

**Main Frame:** 10" I-Beam (W10 x 19)

**Tilt Bed Main Frame:** 8" x 4" x ¼" tube

**Inside cross members:** 6" channel

**Top cross members:** 3" channel (16" OC) pierced tube bed frame

**Deck Height / Width:** 34" x 102"

**Tilt bed:** 20' wood (knife edge rear approach w/ drop down ICC bumper light bar)

**Front Stationary:** 5' wood

**Cylinders:** (2) gravity feed self-dampening cushion cylinder w/ flow-control (w/ lock-out)

**Sides:** 6" channel w/ stake pockets and rub rail

**Jack:** (2) Dual Ram 12K drop leg

**Coupler:** adjustable ¾" plate hitch w/ 3" pintle eye (60K)

**Axles:** (2) 10,000 lb. spring suspension, oil bath with electric brake

**Wheels:** 16" dual, 8 lug

**Tires:** (8) - 235 80 R 16 E, 10 ply radials

**Boarding Step:** Front driver side

**Storage:** tool tray w/ solid bottom & locking lid in tongue

**Floor:** 2" x 8" Pressure treated pine

**Breakaway kit:** 12 Volt battery, with charge wire and LED test light

**Safety chains:** (2) 3/8" w/ hook and closures

**Wiring:** run in conduit tubing with junction boxes and neatly spliced

**Lights:** LED

**Paint:** cleaned, primed and painted 100% Black

**Warranty:** 1 year with MSO provided



## FEATURES & HIGHLIGHTS




TOOL TRAY, SEALED WIRING, 12K JACK  
LED LIGHTS, BOARDING STEP



GOOSENECK PACKAGE AVAILABLE  
CROSSMEMBERS 16" ON CENTER



EASY LOAD APPROACH ANGLE

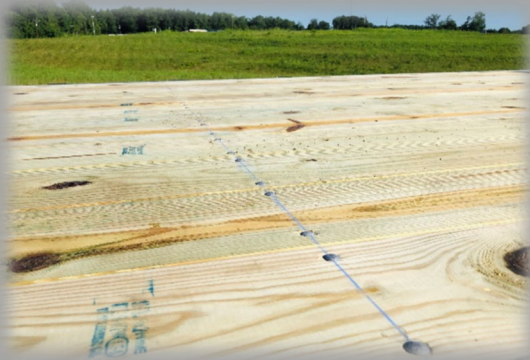

PRESSURE TREATED PINE FLOOR



TWIN CYLINDER W/ B&A LATCH