


1800 1030 244

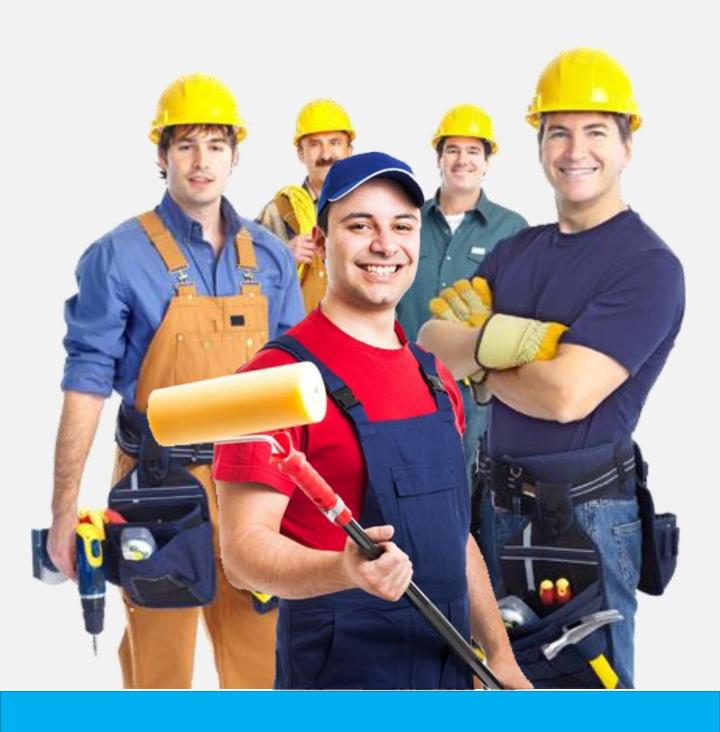

MAGIC ZONE

Your Budget Our Mission


We are manufacturer of some products We are project distributor for some products We are dealer of some products We are trainer for new products We are applicator for making houses



Adhesive



Ready Plaster










































AAC BLOCK

- Cost Saving 30 % to 35 %
- Lightweight
- Termite / Pest Resistant
- Long lasting
- Sound Proof
- Acoustic Performance
- Precision
- Seismic Resistant
- Eco-Friendly and Sustainable
- Thermally Insulated & Energy Efficient
- Fire Resistant
- Easy Workability and Design Flexibility
- Eco-friendly & Faster Construction

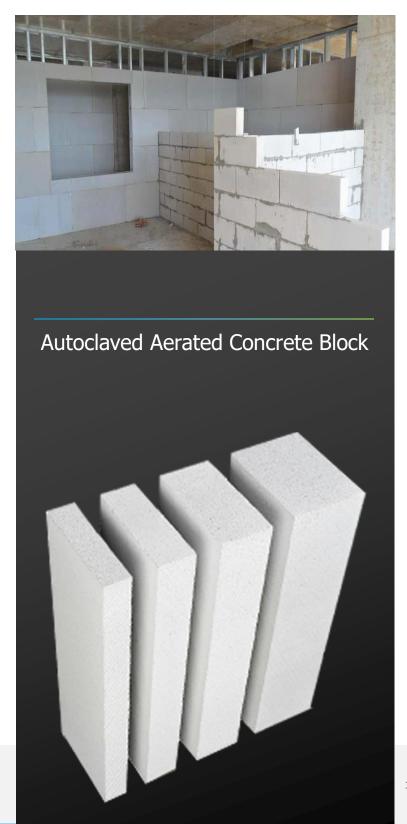











MAGIC ZONE

Creation Pvt Ltd

We are providing professional mason training for aac blocks installation. No chargeable...





Badu Road, Madhyamgram, Kolkata - 700128




- Termite / Pest Resistant
- Low Maintenance
- Lightweight
- Fire Resistant
- Thermally Insulated & Energy Efficient
- Eco-friendly & Sustainable
- Seismic Resistant
- Soundproof
- 30 % Save on Wall Plaster



(+91) 9875300773 (+91) 6289904092 account@magiczoneindia.com



Size Chart 1st

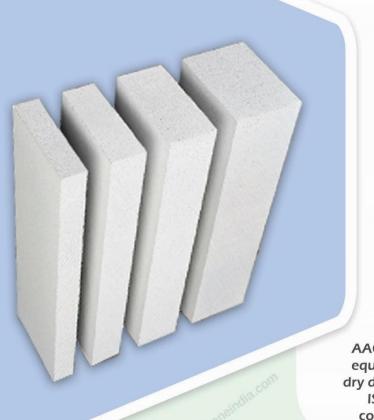



MAGIC ZONE

CREATION PVT LTD

WWW.MAGICZONEINDIA.COM

AAC block compressive strength greater than equal to 4 newton per square millimeter, Over dry density 551 to 650 kg per meter cubic as per IS 2185 Indian Standard Specification for concrete masonry units PART 3 autoclaved.

BLOCK



AAC **BLOCK**



INSTALLATION TOOLS



SIZE

600mm (24")	250mm (10")	75mm (3")	88.88	PCS Per Cubic Meter
600mm (24")	250mm (10")	100mm (4")	66.66	PCS Per Cubic Meter
600mm (24")	250mm (10")	125mm (5")	53.33	PCS Per Cubic Meter
600mm (24")	250mm (10")	150mm (6")	44.44	PCS Per Cubic Meter
600mm (24")	250mm (10")	200mm (8")	33.33	PCS Per Cubic Meter
600mm (24")	250mm (10")	250mm (10")	26.66	PCS Per Cubic Meter
600mm (24")	200mm (8")	100mm (4")	83.33	PCS Per Cubic Meter
600mm (24")	200mm (8")	125mm (5")	66.66	PCS Per Cubic Meter
600mm (24")	200mm (8")	150mm (6")	55.55	PCS Per Cubic Meter
600mm (24")	200mm (8")	200mm (8")	41.66	PCS Per Cubic Meter
600mm (24")	200mm (8")	250mm (10")	33.33	PCS Per Cubic Meter

1 CUBIC METER AAC BLOCK = APPROXIMATE 426 PCS RED CLAY BRICKS

Badu Road, Madhyamgram, Kolkata - 700128



CALL US NOW +1800 1030 244



(+91) 9875300773 (+91) 6289904092 account@magiczoneindia.com

Size Chart 2nd





MAGIC ZONE

CREATION PVT LTD

WWW.MAGICZONEINDIA.COM

AAC block compressive strength greater than equal to 4 newton per square millimeter, Over dry density 551 to 650 kg per meter cubic as per IS 2185 Indian Standard Specification for concrete masonry units PART 3 autoclaved.

BLOCK ADHESIVE



AAC BLOCK



INSTALLATION TOOLS



SIZE

600mm (24")	250mm (10")	75mm (3")	88.88	PCS Per Cubic Meter
600mm (24")	250mm (10")	100mm (4")	66.66	PCS Per Cubic Meter
600mm (24")	250mm (10")	125mm (5")	53.33	PCS Per Cubic Meter
600mm (24")	250mm (10")	150mm (6")	44.44	PCS Per Cubic Meter
600mm (24")	250mm (10")	200mm (8")	33.33	PCS Per Cubic Meter
600mm (24")	250mm (10")	250mm (10")	26.66	PCS Per Cubic Meter
600mm (24")	200mm (8")	100mm (4")	83.33	PCS Per Cubic Meter
600mm (24")	200mm (8")	125mm (5")	66.66	PCS Per Cubic Meter
600mm (24")	200mm (8")	150mm (6")	55.55	PCS Per Cubic Meter
600mm (24")	200mm (8")	200mm (8")	41.66	PCS Per Cubic Meter
600mm (24")	200mm (8")	250mm (10")	33.33	PCS Per Cubic Meter

1 CUBIC METER AAC BLOCK = APPROXIMATE 426 PCS RED CLAY BRICKS

Badu Road, Madhyamgram, Kolkata - 700128





(+91) 9875300773 (+91) 6289904092 account@magiczoneindia.com

AAC Block Adhesive

- Long working time
- No curing required after block work is done
- Improved adhesion between



AAC Block Application Tools

Our own manufacturing



MAGIC ZONE

Tools For AAC Block Installation



High carbon steel and spring steel metal with carbide tipped. A hacksaw is a fine-toothed saw, originally and mainly made for cutting aac blocks

ABOUT US

We are the Quality Hand tools Manufacturer in India and offers engineering excellence for the world's most demanding industries. Our tools range includes bucket trowel, cutting tools, grooving tools, rubber hammer and rubbing tools etc. As a leader in tools manufacturing Industry, we always focus on Quality and customer satisfaction Which makes us different from other tools manufacturing companies.



High carbon steel and spring steel metal bucket trowel for laying AAC block adhesive Thickness - 4", 5", 6", 8", 10"

MAGIC ZONE

Creation Pvt Ltd

Your Budget Our Mission



CONTACT WITH US

1800 1030 244



Hand held tool is use for wall chasing which is designed for routing of wire and plumbing works.



Rotary Hammer .. Rated Voltage: 220 V~, Rated Frequency: 50Hz , Input Power : 600W, No-Load Speed: 850r/min



Made of rubber with large wooden handle, It is a tool of preference for AAC blocks workers.





GET IN TOUCH

Badu Road, Madhyamgram, Kolkata - 700128



(+91) 9875300773 (+91) 6289904092 www.magiczoneindia.com

NOTCH TROWEL

4mm / 6mm / 8mm

Rs 180/- Rs 250/-

SAVE RS 70

WATER LEVEL SCALE

Rs 650/- Rs 850/-

SAVE RS 200

RUBBING TOOL

Rs 630/- Rs 730/-

SAVE RS 100







CARBIDE TIPPED HAND SAW

Rs 1400/- Rs 1650/-

SAVE RS 250



BUCKET TROWEL

4" - 460

5" - 490/- I 8" - 555/-

6" - 525/- I 10" - 590/-

SAVE RS 110



RUBBER

HAMMER

Rs 350/- Rs 410/-

SAVE RS 60



GROOVING

TOOL

Rs 630/- Rs 730/-


SAVE RS 100



Fly Ash Bricks

We are among st the leading supplier of Fly Ash Brick. We offer a high quality range of Fly Ash Bricks. Supplied all across in bulk with the best rate in the market, demand of our products is increasing at a rapid rate. The accurate size bricks provided by us give the correct. That's why we have a wide range of premium quality Fly Ash bricks.

By keeping our track with the current market developments, we are betrothed in presenting a wide consignment of Eco Friendly Bricks. In tune with the universally acclaimed standards of quality and durability, these are built with utmost perfection and excellence. Our clients can get these from us at most reasonable rates.

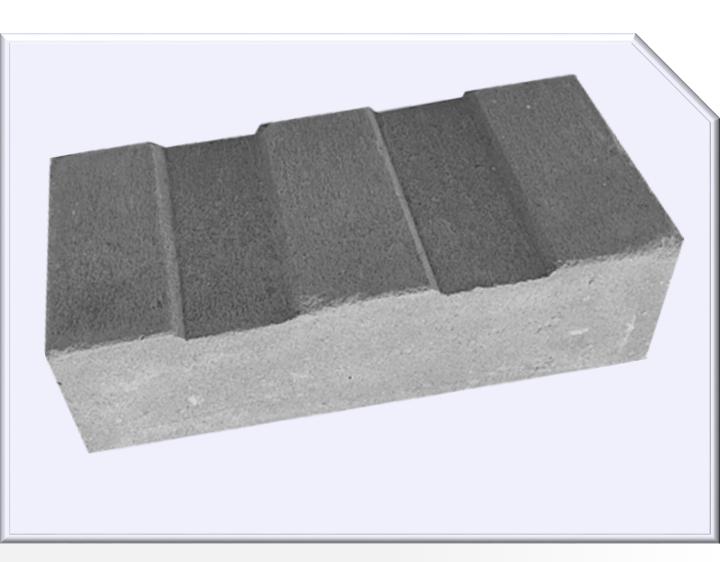



Size

190mm x 90mm x 90mm

230mm x 110mm x 70mm

250mm x 120mm x70mm




Tile & Stone Adhesive





Tile adhesive is a premixed blend of exceptionally well-chosen ordinary portland cement, well-graded fine sand, and added substances to improve its basic properties for laying tiles and giving it more strength and flexibility. Superior tile Adhesives can be utilized to lay tiles on existing tiles, on finished concrete, on wooden substrates, or other unique substrates. However, each type of tile adhesive is made for a different type of surface application to give the best output to users based on the usage areas and atmosphere. Tile Adhesive can be utilized for fixing a wide range of tiles and stones over different substrates. These Tile Fixing Adhesives are prepared to-blend, self-restoring, and with astounding adhesion properties. Their superior bonding strength prevents shrinkage, breaks, and slippage of tiles.

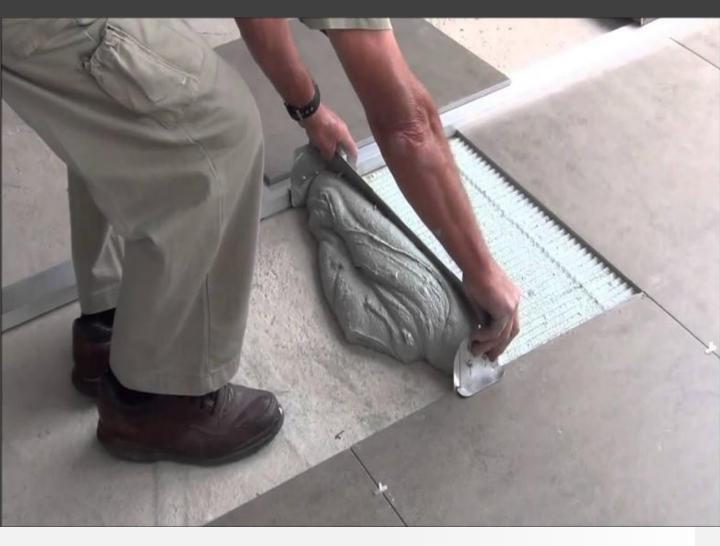

Tile & Stone Adhesive

Use tile adhesive & save your costly tiles

Tile Type

- Ceramic Tiles
- Vitrified Tiles
- Glass MosaicTiles
- Low PorousStones
- Natural Stones
- Metal Tiles
- EngineeredStones

Tile Surface

Surface

- Internal Cement floor
- Internal Wood / plywood floor
- Internal Wood / plywood wall
- Internal Metal floor / Wall
- Internal Concrete / plaster wall
- Internal Gypsum wall board wall
- Internal Cement backer board wall
- Internal Calcium silicate board Wall
- Internal wall Concrete (more than M25 grade) & metal
- Wall: Spot bonding method
- External Concrete / cement floor
- External Concrete / plaster wall
- External wall Concrete (more than M25 grade) & metal
- Wall: Spot bonding method
- Internal / External Swimming pool





Wall Putty





Kills Bacteria & Antimicrobial Wall Putty

The quality of the indoor environment is a determining factor for health, given that people spend most of their lives inside buildings. After several months of construction microorganisms like microalgae, fungi, lichens and mosses develop on surfaces. Nuvoco's Zero M GermiCheck — An antimicrobial wall putty, kills bacteria and keeps homes safe and bacteria-proof. It is produced by using food-grade antimicrobial additives which provides a safe environment.



Superior Coverage & Smooth Finish Putty

Wall Putty provides a smooth finish on the surfaces of walls, prevents cracks, flakes, peels, and dampness – on both interior and exterior walls – that occurs due to changes in the weather. Poly Rich Wall Putty provides extensive, superior coverage and saves the walls. Its high water repelling characteristic prevents dampness and formation of discolored patches, year after year.



Ultimate Whiteness & Premium Marble Finish Putty

Birla White Excel Putty is a premium quality base coat that helps cover the porosity of highly absorptive cement substrates. It offers ultimate whiteness to your walls in order to enhance the performance of topcoat emulsions, and also gives your walls a marble-like finish.



Waterproof Putty

WATERPROOF PUTTY is white cement based premium quality putty with some special unique properties. This ready to use, inimitable variety powder putty can be used externally or internally on concrete/mortar substrates to provide smooth aesthetic finish & extended life of top coat paints.



POP Powder







Imported Gypsum Plaster





White Cement










External Primer



Ready Mix Plaster

Ready Mix Plaster



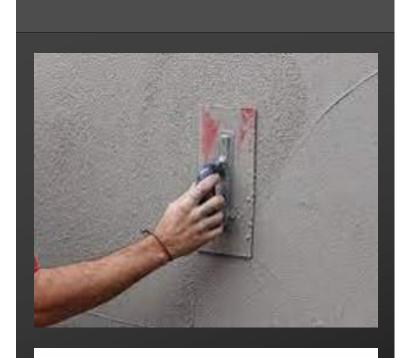



Ready Mix Plaster



Quality of ingredients

The main ingredient used in conventional cement sand plaster is sand. The quality of sand determines the quality and durability.

cement plaster	ready mix plaster
Sand is obtained from river beds and may contain slit and other organic impurities and most of the times they may not be graded.	Uses cement, clean and fine graded sand, fly ash and polymer additives.
May not be able to follow gradation of sand which may lead to cracks and other defects.	Graded sand is used in a ready mix plaster and can ensure quality and compactness in plastering.

Ready Mix Plaster

Plaster The strength of plaster depends on compactness that requires perfect packing of particles. The compactness of plaster is dependent on the gradation of particles of sand. If sand is not graded it is very difficult to achieve the required compactness which reduces the plaster strength significantly.

ready mix plaster

Cement sand plaster

<u> </u>	
Ingredients are procured loose, conveyed and mixed at site before application.	Ingredients are available in ready mix form. Only water to be added before application.
The quality of ingredients may vary due to possible change in sand sources. Additional labour charges incurred in ingredient shifting and mixing.	The quality of ingredients will be standard. The materials are ready mixed and can be easily conveyed and mixed at site.
Ingredient mixing proportions may vary due to manual mixing at the site. Very difficult to maintain proportions of ingredients at the site.	The ingredients are in ready mix form and the proportions will not vary. The proportions are maintained easily and hence the quality of plaster is also excellent.

Wastage of ingredients

cement sand plaster	ready mix plaster
The main ingredient sand is available in loose form and has to be stored. The wastage of sand is very high in conventional plaster. Cement plaster creates more wastages at site and housekeeping labor cost will be high.	Plaster material is available in ready mix form and very easy to store and convey for works. Ready-mix plaster generates less wastage. Housekeeping labour charges are less compared to cement plaster.

Cement plaster creates more wastages at site and housekeeping labor cost will be high.	Housekeeping labour charges are less compared to cement plaster.		
Ease of application			
cement sand plaster	ready mix plaster		
Cement plaster adhesion is less and hence application speed is low. and rebound wastage is very high	Ready mix plaster consists of polymer based additives and hence adhesion is very easy and application speed is fast. Rebound wastage is very less compared to conventional cement plaster.		
Requires a long curing period extending up to7 days	Polymeric content induces high water retention properties and hence requires on 3-4 days of curing.		

Local Hand Mix Plaster



Mixing - Hand Mix Cleaning - Hand Cleaning Sand Drying - No Ingredients - Sand + Cement

290 Kg = (Sand 240 kg + Cement 50 kg)

Sand 6 + Cement 1 (Sand Price 480 rs) + (Cement 350 rs) = **840/- rs**Total Coverage - **80 Square Feet**

10.50 Rs Per Square

Nuvoco (Lafarge) - Ready Mix Plaster



Mixing - Mixer Machine
Cleaning - Sand Cleaning Machine
Sand Drying - Sand Dryer Machine
Ingredients - Sand + Cement + Polymer +
Other Chemical to Increase Quality

290 Kg = (Ready Mix Plster 40 kg x 7.25 Bags)

Ready Mix Plaster 40 Kg Per Bag
Price - (Nuvoco Plaster) 230 Rs x 7.25 Bags = **1667/- rs**Total Coverage - 1 Bag Coverage 22 Square Feet x 7.25 Bags = **160 Square Feet**

10.40 Rs Per Square

Toll Free - 1800 1030 244

Save Crack



Dalmia Ready Mix Plaster



(Putty Not Required)

Dalmia Ready Mix Plaster (Putty Not Required)







CEILINGFAST



Ceiling Putty Cum Plaster



Berger Project Distributor

Putty, Paint & Primer













WHY YOU CHOOSE US?

- Professionalism: As an experienced waterproofing contractor, we have a team of technicians trained to conduct outstanding workmanship while delivering quality standards.
- Customer Satisfaction: One of our main priorities along with genuine workmanship is customer satisfaction. We operate on the philosophy of fulfilling and even going beyond our clients' expectations.
- Quality Service: A waterproofing specialist in Kolkata should be able to provide top-notch quality in all areas of waterproofing. We are committed to ensuring that our teams deliver exceptional service.



(+91) 9875300773

(+91) 6289904091

66

We provide waterproofing service for every Domestic & Industrial space.







MAGIC ZONE CREATION PVT LTD



CALL FOR MORE INFO 1800 1030 244



1st Floor, No.4, Star Green Tower, Sukanta Pally, Belghoria Express, Kolkata - 700065

info@magiczonecreation.com


magiczonecreation@gmail.com

Waterproofing Type

PU Roofkoat
Weathercoat Roofguard
Weathercoat Kool & Seal
Proshield – P/H/F
DampStop
Latex Shield 2K
Tankshield PW

Dampshield Elasto Illusion Sealer Latex Plus Crack Fill Paste Crack Fill Power Seal-O-Prime

Crack Repairing Solution

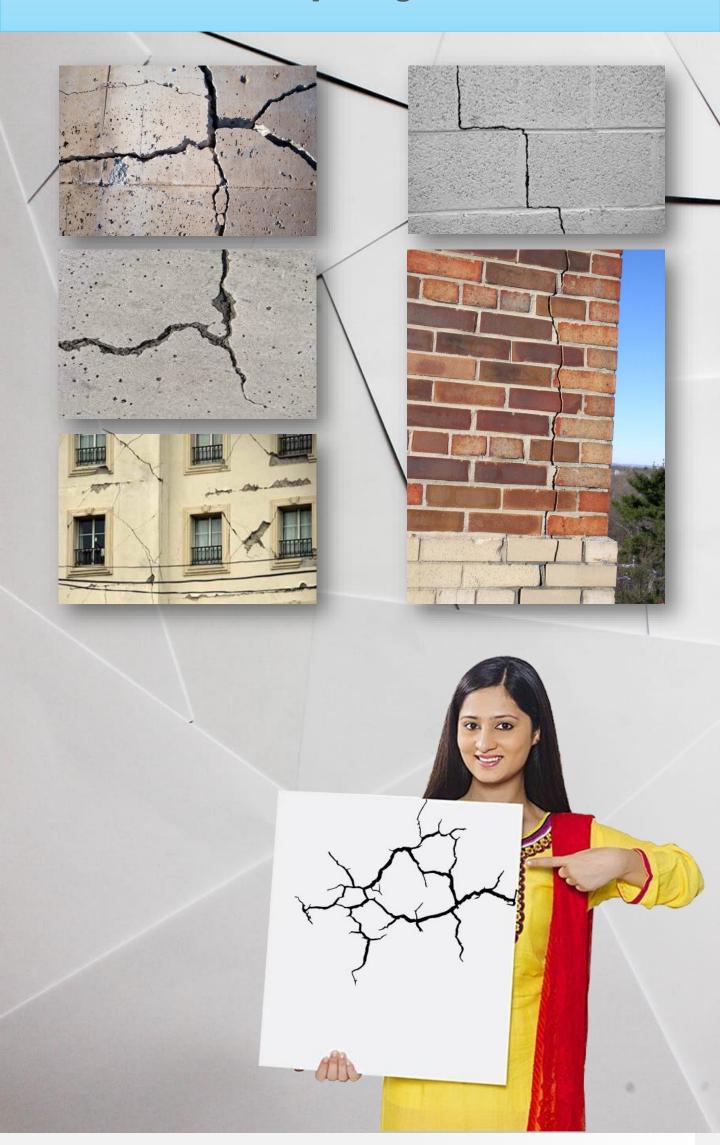

Flush Door































RCC Frame

Long Durability & Cost Effective



Long Durability & Cost Effective



RCC Window Frame



Long Durability & Cost Effective



RCC Window Frame




RCC Door & Window Frame







High Quality Optic Fiber

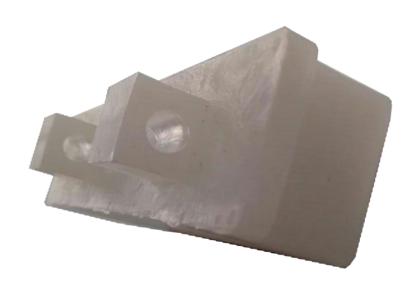

RCC Door Frame After Painting









Protect Your Roof



Protect Your Roof







Paver Block
















Kerb Block























Manufacturer

Distributor

Project Dealer

Contact (+91) 9875300773

E-Mail

info@magiczoneindia.com magiczoneindia@gmail.com



Magic Zone Creation Pvt Ltd

Badu Road, Madhyamgram, Kolkata, West Bengal 700128, India



www.magiczoneindia.com









Thank You