
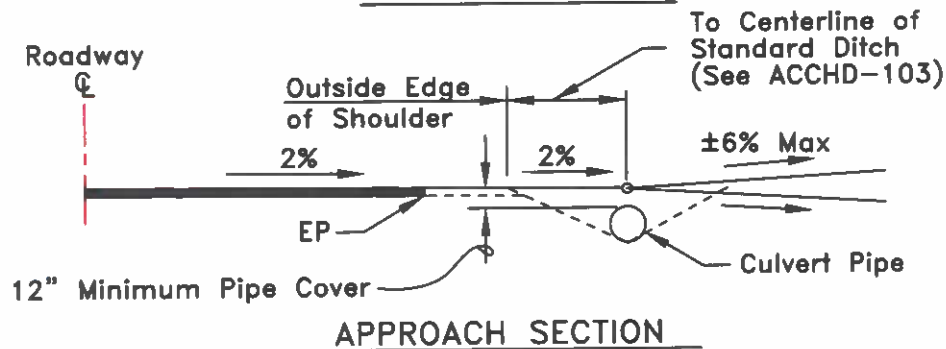


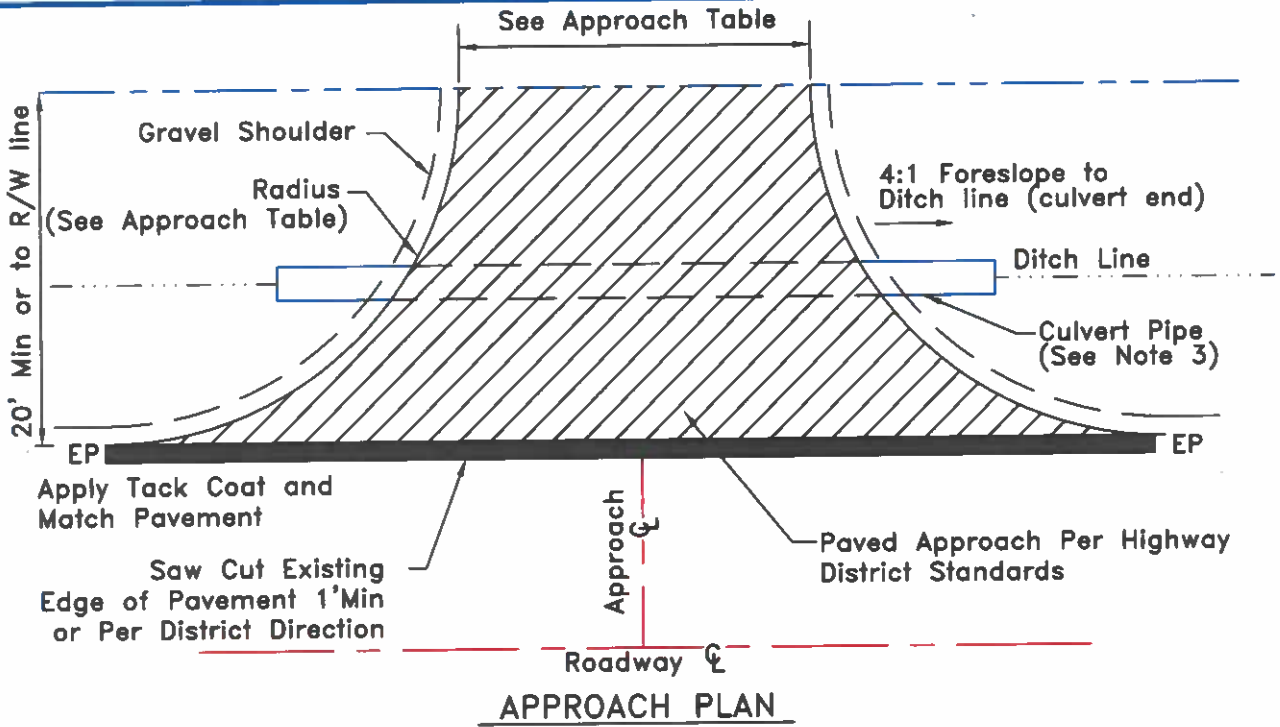

APPROACH TABLE

APPROACH TYPE	Appr Width*		Min**
	Min	Max**	Radius
Residential, Three or More	24'	30'	20'
Commercial (One Way)	20'	30'	20'
Commercial (Two Way)	24'	40'	20'

* Does not include required 2' gravel shoulder on each side of approach.

** Or based on applicable commercial design vehicle.

PAVED APPROACH

STRUCTURAL SECTION **

2.5" Surfacing (Required)
6" Base
9" Subbase

**COMMERCIAL APPROACH OR RESIDENTIAL APPROACH
SERVING THREE (3) OR MORE PROPERTIES**

N.T.S.

NOTES:

- Approaches spacing shall conform to section 3000 of the ACCHD Manual.
- Ingress/Egress by forward motion only.
- Culvert pipe shall be 12" min. diameter. Culvert pipe shall extend to the intersection of the ditch line and the 4:1 approach foreslope. Pipe material shall be either 0.064" thick corrugated steel, 0.060" corrugated Aluminum or Class V reinforced concrete.
- For approach serving primarily commercial trucks refer to section 3061.050.
- Serving One (1) Commercial Property or Three (3) or More Residences.

REVISED 01/22

ASSOCIATION OF
CANYON COUNTY
HIGHWAY DISTRICTS
CANYON COUNTY, IDAHO

COMMERCIAL & MULTIPLE
RESIDENTIAL APPROACH

STANDARD DRAWING
ACCHD-106