


# DRYER LIGHT REPLACEMENT

**THORESON**  
**MCCOSHMC**


# TECH

AUTOMATED INTELLIGENCE




## T-D Series Dryer


PROCESS TEMP = 69°F      DRYER IS ON  
 PROCESS SETPT = 70°      DEWPOINT = -40°F

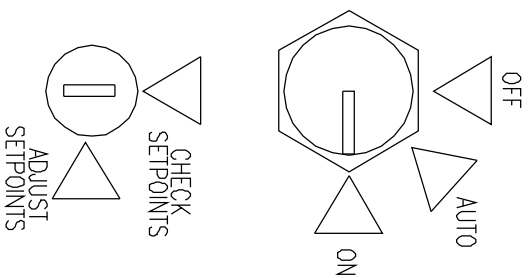

- TEMPERATURE SETPOINTS
- TIME/AUTOSTART SETPOINTS
- DEWPOINT SETPOINTS
- OPTIONAL SETPOINTS

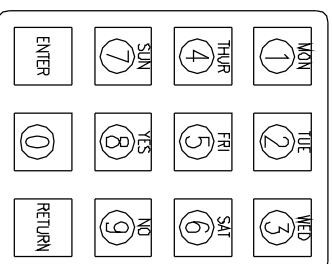

- 2) 415002 LIGHT, W22U-12I-WLA , 12V AMBER
- 1) 415003 LIGHT, W22U-12I-WLR , 12V RED
- 1) 415009 TAG, PROCESS
- 1) 415010 TAG, REGEN
- 1) 415011 TAG, ALARM

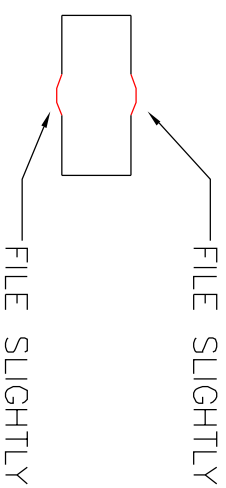

- 1) DISCONNECT POWER FROM THE UNIT.
- 2) DISCONNECT THE WIRES FROM THE EXISTING LIGHTS.
- 3) REMOVE THE LIGHTS FROM THE TOUCH PAD.
- 4) FILE THE CENTER OF THE HOLE SLIGHTLY TO ALLOW THE LIGHT TO BE INSERTED.
- 5) INSTALL THE LIGHT WITH THE PROPER TAG AND RECONNECT THE WIRING. THE TERMINAL WILL NEED TO BE REMOVED FROM THE WIRE SO IT CAN BE WIRED TO THE LIGHT.