

78 Positions

Product Specification
 Material :Glass-Filled Thermoplastic PBT,UL94V-0 rated
 Insulator :Brass
 Contact :Brass
 Shell : Steel, 100 μ " Tin Over 50 μ " min Copper
 Clinch Nut: Brass, 100 μ " min Nickel Plated.
 Screwlock :Brass, 100 μ " min Nickel Plated.

Electrical
 Contact Resistance :20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance :1000
 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60HZ for 1 minute
 Current Rating :3 AMP
 Voltage Rating :250 VAC/rms 60HZ

DIMENSION TABLE


POSITIONS	A	B	C	D	E	F
15	30.81	24.99	16.92	16.33	2.29	19.20
26	39.20	33.30	25.25	24.70	2.29	27.70
44	53.05	47.04	38.96	38.40	2.29	41.10
62	69.40	63.50	55.42	54.80	2.41	57.30

~~Cobb Technology~~

REV.	1.0	Initial Release	ECN. NO.	N. Boon	DR. BY	03-July-2006	DATE
REV.	1		ECN. NO.	2			

MAT'L:	FINISH:	TITLE :	D Sub High Density DIP Straight
SCALE:	NTS	SHEET:	1/4
DR:	N. Boon	REV.:	1.0
DATE:	03-July-2006		

f: Position of Clinch Nut





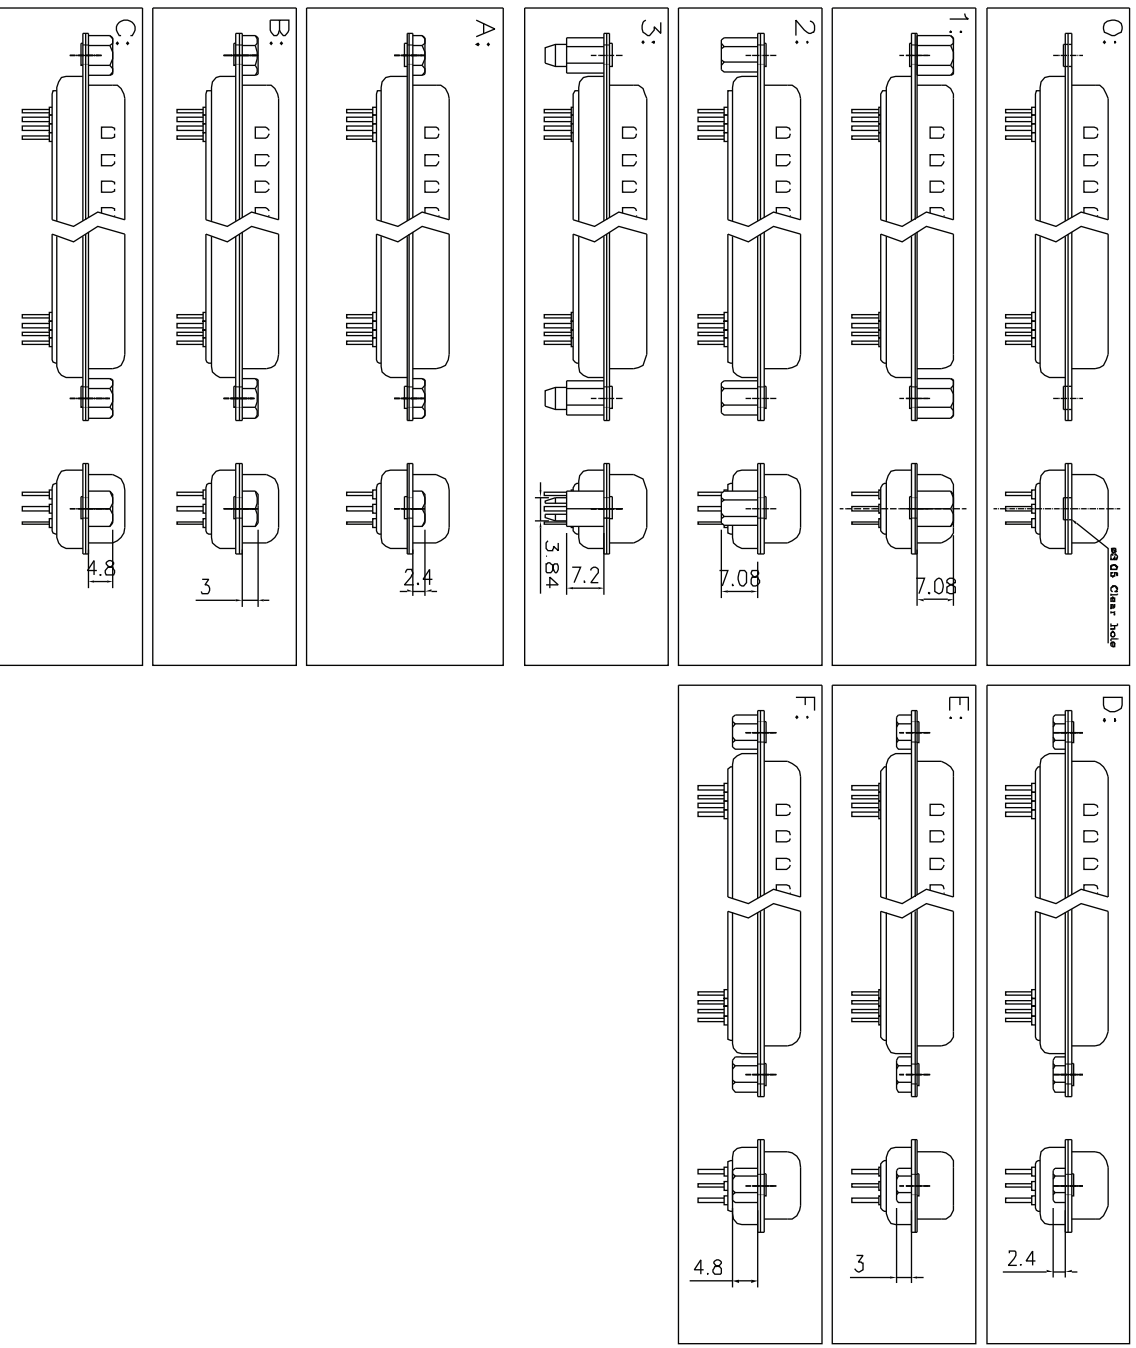


1.0	Initial Release	N. Boon	03-July-2006
REV.	ECN. NO.	DR BY	DATE
1			
2			
3			
4			
5			

Cobb Technology

MAT'L:	FINISH:	TITLE :	D Sub High Density DIP Straight
		X.	±0.38 X ⁹ ±3 ⁹
		X.X	±0.25 X.X ⁹ ±1.0 ⁹
		X.XX	±0.13
		UNIT:	mm
		SCALE:	NTS
		SHEET:	3/4
		DR:	N. Boon
		REV.:	1.0
		DATE:	03-July-2006
		PART NO.:	105-XXXXXXXXXXXX
		DWG. NO.:	105-XXXXXXXXXXXX
		CHKD.:	
		APPD.:	

PCB LAYOUT PATTERN

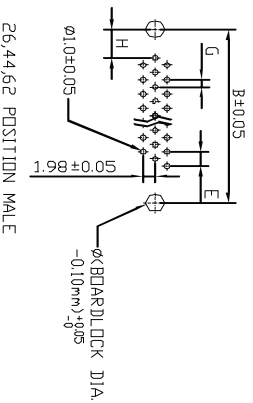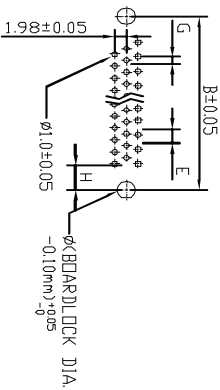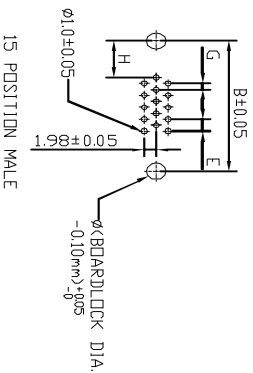

Positions	G	H
15M/F	1.145	7.04
26M/F	1.145	6.88
44M/F	1.145	6.88
62M/F	1.205	7.00

1.0 Initial Release
 ECN. NO. N. Boon
 DR.BY DR.BY
 DATE 03-July-2006

MAT'L.: **Cobb Technology**

FINISH:

TITLE : D Sub High Density DIP Straight

X. ±0.38 X^ø ±3^ø
 X.X ±0.25 X.X^ø ±1.0^ø
 X.XX ±0.13

UNIT: mm
 SCALE: NTS
 SHEET: 4/4
 DR: N. Boon

APPO.:
 CHKO.:
 PART NO : 105-xxxxxxxxxxxx
 DWG. NO.: 105-xxxxxxxxxxxx
 REV.: 1.0
 DATE: 03-July-2006