



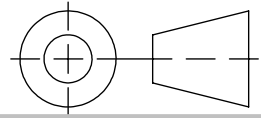
REVISIONS				
ZONE	REV.	DESCRIPTION	BY	DATE
	A	INITIAL RELEASE	BC	7/31/2019

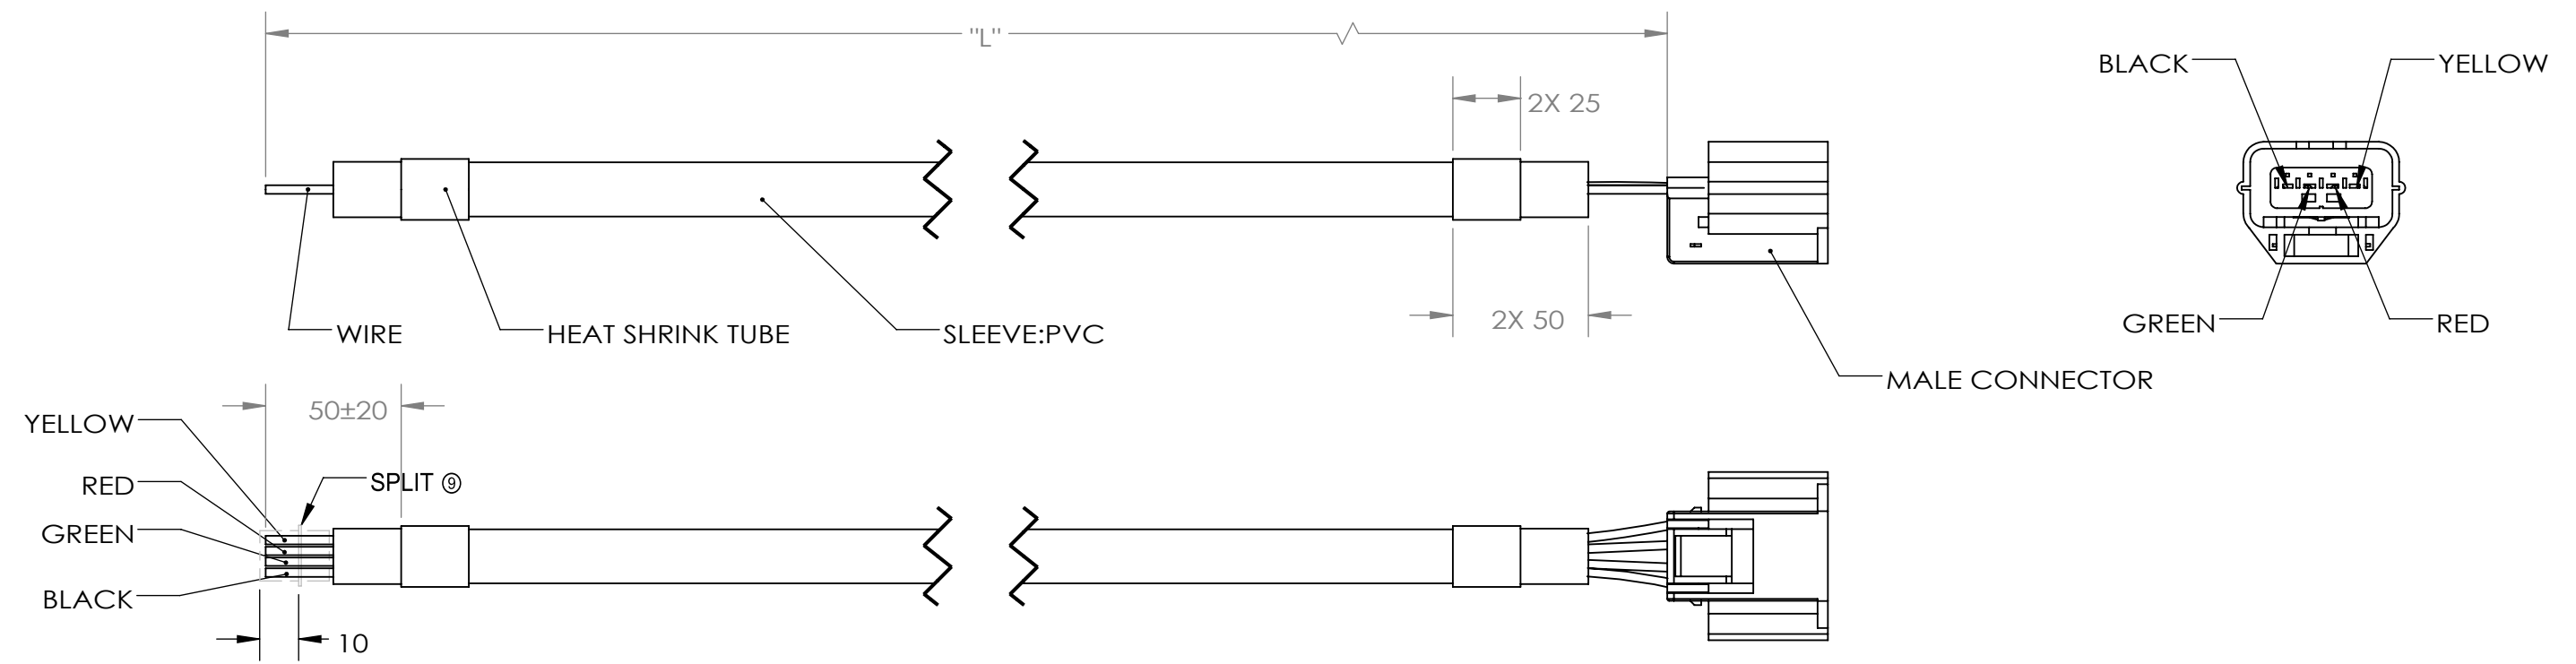

NOTES:

1. WIRE: UL2464; 22AWG(17/0.16); OD:1.6±0.10; Max 80 Deg C
2. CABLE IS NOT BRUISED AND CRUSHED;
3. CABLE PASS THE CONTINUITY TEST 100%;
4. WIRE AND TERMINAL SHOULD CRIMPING FIRM, SHOULD BE ABLE TO WITHSTAND THE FORCE OF 30N FOR 1 MINUTE WITHOUT SHEDDING;
5. BETWEEN THE TERMINAL AND THE BASE HOLE SHOULD BE ABLE TO WITHSTAND THE FORCE OF 15N FOR 1 MINUTE WITHOUT SHEDDING;
6. BETWEEN THE TERMINAL AND THE CONNECTOR SHOULD BE ABLE TO WITHSTAND THE FORCE OF 60N FOR 1 MINUTE WITHOUT SHEDDING;
7. IP67 REQUIRED.
8. SPLIT REPRESENTS CONDUCTOR WITHIN THE WIRE INSULATOR
9. USE YAZAKI 7283885330 HOUSING OR EQUIVALENT.
10. USE YAZAKI 7116441602 TERMINAL OR EQUIVALENT.
11. USE YAZAKI 7158316660 WIRE SEAL OR EQUIVALENT.
12. HEAT SHRINK TUBE IN 2 PLACES AS NEEDED.

Part Number Length Designation	
LENGTH	
-1	1 METER
-2	2 METERS
-10	10 METERS
0.52	20 INCHES

PROPRIETY AND CONFIDENTIAL  THIS DRAWING CONTAINS INFORMATION WHICH IS THE EXCLUSIVE PROPERTY OF COBB TECHNOLOGY. REPRODUCTION OR USE BY OTHERS IS NOT PERMITTED WITHOUT THE EXPRESS WRITTEN CONSENT OF COBB TECHNOLOGY.	UNLESS OTHERWISE SPECIFIED  DIMENSIONS ARE IN MILLIMETERS  TOLERANCES: WHOLE NUMBERS ±.5 .X ±0.15 .XX ±0.10 .XXX ±0.050 ANGLES ± 1°	APPROVALS DESIGNED: B.C. 7/31/19 DRAWN: B.C. 7/31/19 CHECKED: ENGR APPR: MFG APPR: QA APPR:	DATE 7/31/19 7/31/19	  TITLE <b>YAZAKI 4-PIN CONNECTOR WITH CABLE</b>		
	THIRD ANGLE PROJECTION 	DO NOT SCALE DRAWING	MATERIAL: <b>See notes</b>			SIZE <b>B</b>
			FINISH: <b>See notes</b>	SCALE 1:5	SHEET 1 OF 1	