

ATASEE®

LET THE FIRE BEWARE


With its journey of manufacturing of Fire fighting equipments, commencing from 2010, AGGARWAL FIRE SAFETY INDUSTRIES (INDIA) with brand name ATASEE, has expanded its business overseas. ATASEE brand of Aggarwal Fire Safety Industries (INDIA) is Accredited with 14nos. Approvals from Bureau of Indian Standard. Aggarwal Fire Safety industries (INDIA) is Certified for the Quality compliances, ISO 9001: 2008. With a constant endeavor to provide quality products in the field of Fire Protection, company has dedicated itself to the technological up gradation. Owing to the dedication of its team, ATASEE brand has gradually emerged as a leader in quality products. Committed to protect lives, property & businesses, ATASEE has sustained its repute by emerging as a quality products & services provider and guarantees for the Best.

The top Management of ATASEE is a judicious combination of exemplary individuals. The passion to excel and the wealth of experience & knowledge of the Management team render a glow to the brand. It is under their vision and guidance, company has scaled great heights in the market of Fire Protection equipments. Our dedicated team members, involved in technological advancement, manufacturing and sales are the backbone of the company. Our team members take great pride in being the part of the company which is growing with sustainability in quality.

Owing to the detailed knowledge of the market, we are able to cater to the clientele PAN India & overseas. We have a strong support of our dealers who have partnered us in gaining the reputation of ATASEE brand. The company's business is supported by a wide marketing and distribution network, and has established a reputation for strong customer support. In order to gain confidence of our dealers & clients, all our products are manufactured with company's state-of-the-art technology and undergo rigorous testing.

It is the ongoing quest for excellence that helps us to do whatever possible to keep you and your loved ones safe.

BIS APPROVALS

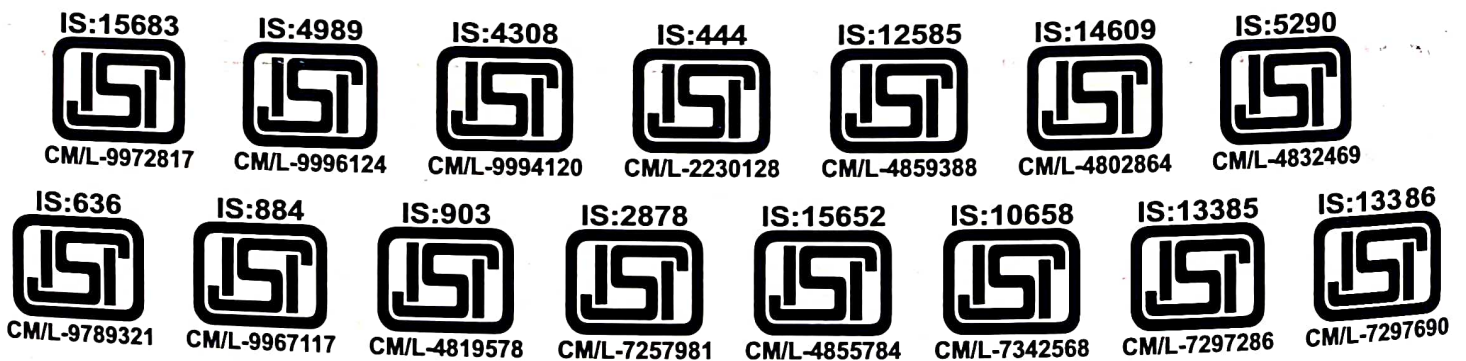

**DRY POWDER ABC TYPE
FIRE EXTINGUISHERS (STORED PRESSURE)**


ATASEE®

LET THE FIRE BEWARE

IS:15683



CM/L-9972817

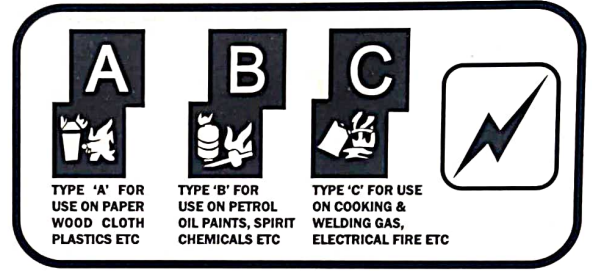

Description	BIS spec.	Discharge Time (Sec.)	Jet Length (Meters)	Test Pressure Kgf/Cm ²
ABC - 1 Kg.	15683	6 - 8	2 - 3	35
ABC - 2 Kg.	15683	6 - 8	2 - 3	35
ABC - 4 Kg.	15683	6 - 8	6 - 7	35
ABC - 6 Kg.	15683	10 - 2	6 - 7	35
ABC - 9 Kg.	15683	12 - 18	6 - 7	35


CARBON DI-OXIDE FIRE EXTINGUISHERS

ATASEE
LET THE FIRE BEWARE

IS:15683



CM/L-9972817

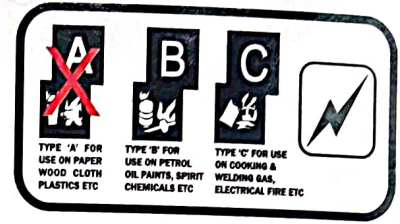

IS:2878



CM/L-7257981

APPLICATION:-

Class B Fires: Fires involving flammable liquids & liquefiable solids like Solvents, Petrol, Diesel, Paints, Rubber, wax, lac & all volatile liquids.

Class C Fires: Fires involving flammable gases, liquefied flammable gases and electrical equipments/systems.

DRY POWDER (BC), WATER & FOAM TYPE FIRE EXTINGUISHERS (STORED PRESSURE)

IS:15683



CM/L-9972817






WATER TYPE



MECHANICAL FOAM



BC DRY POWDER



Available Capacities :

BC Dry Powder : 4 Kg, 6kg, 9kg

Water Type : 9 Ltr.

Foam Type : 9 Ltr.

APPLICATION:-

Class A Fires: Fires involving flammable solid material like Wood, Cloth, Paper, Plastic, etc.

Class B Fires: Fires involving flammable liquids & liquefiable solids like Solvents, Petrol, Diesel, Paints, Rubber, wax, lac & all volatile liquids.

Class C Fires: Fires involving flammable gases, liquefied flammable gases and electrical equipments/systems.


CLEAN AGENT FIRE EXTINGUISHER

ATASEE[®]
LET THE FIRE BEWARE

IS:15683



CM/L-9972817

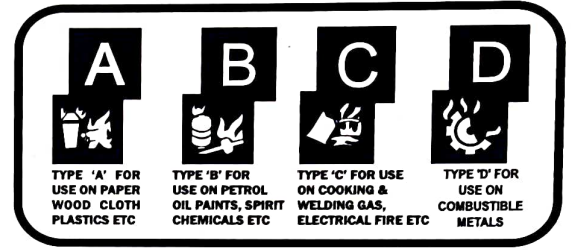

ALSO AVAILABLE IN
AUTOMATIC MODULARS

APPLICATION:-

Class A Fires: Fires involving flammable solid material like Wood, Cloth, Paper Plastic, etc.


Class B Fires: Fires involving flammable liquids & liquefiable solids like Solvents, Petrol, Diesel, Paints, Rubber, wax, lac & all volatile liquids.

Class C Fires: Fires involving flammable gases, liquefied flammable gases and electrical equipments/systems.

Class D Fires: Combustible metals such as potassium, sodium, aluminium, and magnesium

Available Capacities : 1 Kg, 2Kg, 4kg, 6 Kg & 9 Kg

KITCHEN TYPE FIRE EXTINGUISHER

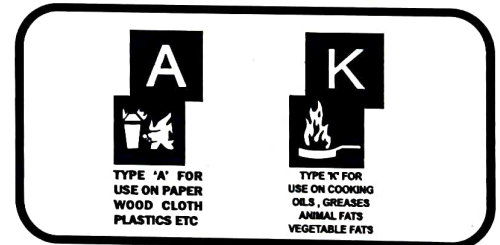

APPLICATION:-


Class A Fires: Fires involving flammable solid material like Wood, Cloth, Paper Plastic, etc.

Class K Fires: Cooking oils and greases such as animal fats and vegetable fats


Available Capacities : 1 Kg, 2Kg, 4kg, 6 Kg & 9 Kg

**SINGLE OUTLET
LANDING VALVES TYPE A**

ATASEE[®]
LET THE FIRE BEWARE

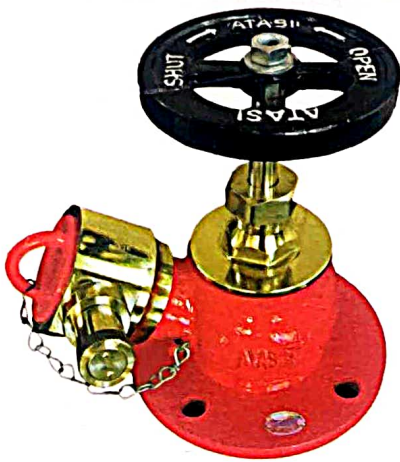

GUN METAL

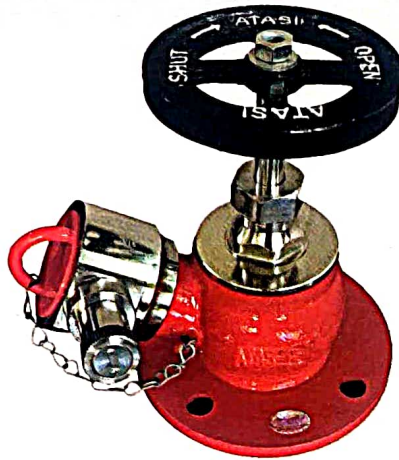

STAINLESS STEEL

IS:5290



CM/L-4832469

Technical Specification

Material : Gun metal LTB-2 & Stainless steel
Size : 63 mm

Specification : Conforming to IS 5290

Performance Test

Hydraulic Test : Tested at 21 Kg/cm²

Water Test : Tested at 14 Kg/cm²

Flow Test : 900 LPM discharge at 7kgf/cm²

**ALSO AVAILABLE IN
ALUMINIUM**

**BRANCH PIPE NOZZLE
HOSE DELIVERY COUPLING**

IS:903



CM/L-4819578



Stainless Steel



Aluminium



Gun Metal

Technical Specification

FIRE HOSE DELIVERY COUPLING

Material : Gun metal LTB-2, Stainless steel & Aluminium
Size : 63 mm

Specification : Conforming to IS 903

Performance Test

Hydraulic Test : Tested at 21 Kg/cm²

Water Test : Tested at 14 Kg/cm²



Aluminium



Stainless Steel



Gun Metal

Technical Specification

BRANCH PIPE WITH NOZZLE

Material : Gun metal LTB-2, Stainless steel & Aluminium
Size : 63 mm

Specification : Conforming to IS 903

Performance Test

Hydraulic Test : Tested at 21 Kg/cm²

Water Test : Tested at 14 Kg/cm²

HOSES

ATASEE[®]
LET THE FIRE BEWARE

RRL HOSE



IS:636

CM/L-9789321



THERMOPLASTIC HOSE



IS:12585


CM/L-4859388




FIRST AID HOSE REEL DRUMS

IS:884


CM/L-9967117

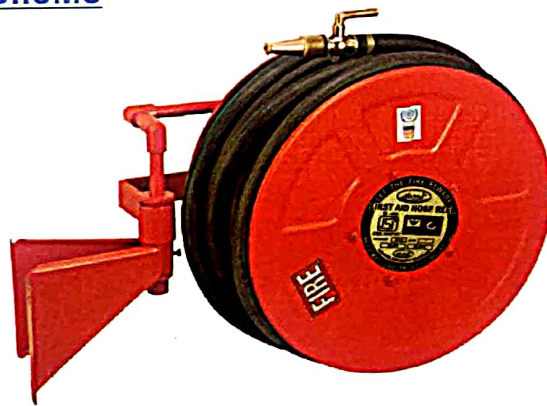

INDIAN STYLE

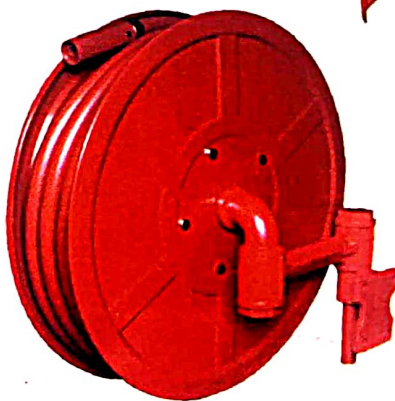


MANUAL SWING ARM

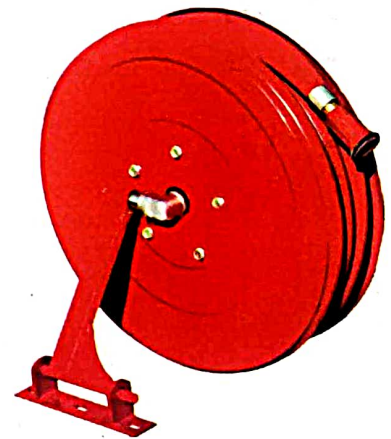


FIXED ARM

FIRE BRIGADE IN LET CONNECTIONS


ATASEE[®]
LET THE FIRE BEWARE

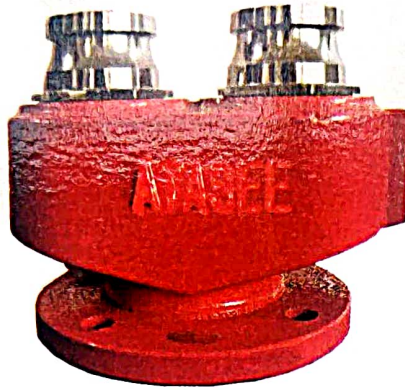

2 WAY COLLECTION HEAD

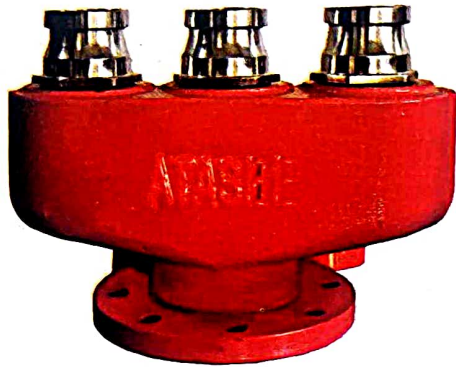


3 WAY COLLECTION HEAD

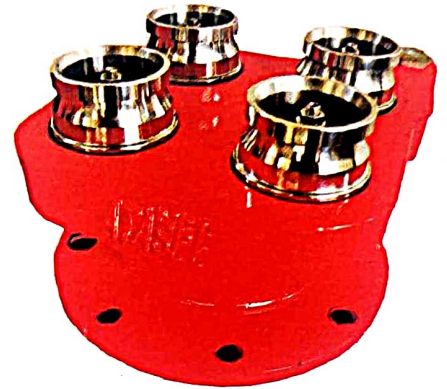

4 WAY COLLECTION HEAD


FIRE HOSE CABINETS/FRAMES

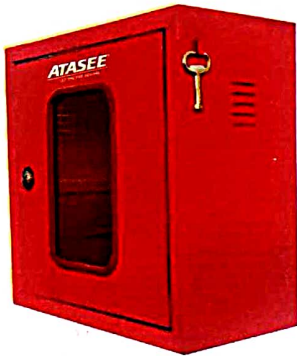

Size : All sizes of boxes/Frames fabricated as per standards & client's specification

Type : Single Door/Double Door type with locking arrangement front glass and key.

FIRE DETECTION SYSTEM



SMOKE DETECTOR



HEAT DETECTOR




FIRE ALARM PANEL

Available in 2 Zone, 4 Zone, 6 Zone, 8 Zone

FLEXIBLE SPRINKLER HOSE FITTINGS

ATASEE
LET THE FIRE BEWARE

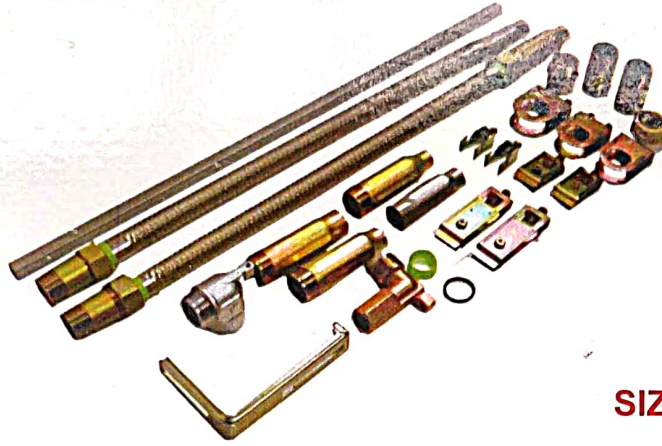


ECHASE-FLEX

SIZES : 700mm to 1800mm


AUTOMATIC SPRINKLERS



PENDENT TYPE

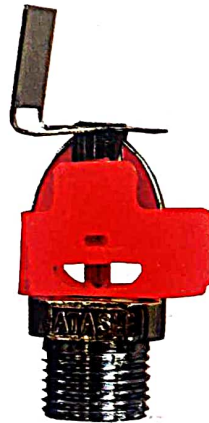

SIDE-WALL TYPE

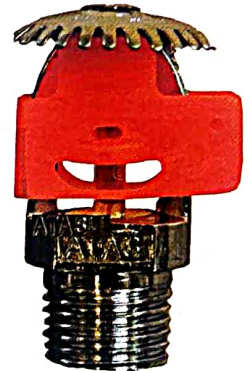


UPRIGHT TYPE

HIGH VOLTAGE - INSULATING MAT
TOTAL SAFETY UPTO 66 KV Z

IS:15652




CM/L- 4855784

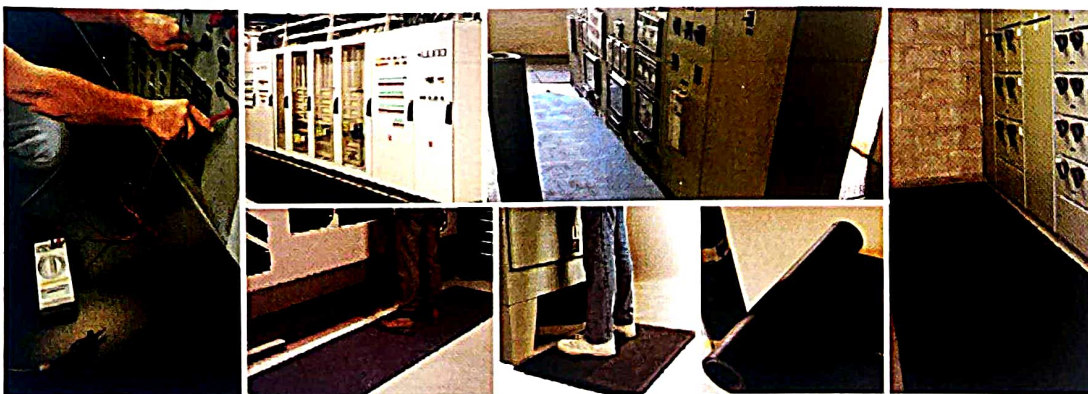

SI No.	Class/Use Voltage's	Category	Recommended Thickness (mm)
1.	A/0 to 3.3 KV	III	2.0
2.	B/3.3 to KV	III	2.5
3.	C/11 to 33 KV	III	3.0

TROLLEY MOUNTED FIRE EXTINGUISHER

IS:10658

 CM/L-7342568



**DCP (BC)
 TYPE FIRE
 EXTINGUISHER**

IS:13385

 CM/L-7297286



**WATER
 TYPE FIRE
 EXTINGUISHER**

IS:13386

 CM/L-7297690



**M/FOAM (AFFF)
 TYPE FIRE
 EXTINGUISHER**



Capacity (Ltrs.)	Discharge Time (Sec.)	Jet Throw (Meters)	Discharge Qty. (Min.)	Test Pressure Kg/Cm ²	Gas Cartridge Used/Cylinder
DCP 25	25-30	6	80%	35	499gms./1 Kg.
DCP 50	40-50	8	85%	35	2 Kg.
DCP 25	50-60	10	85%	35	2 Kg.

Description (Ltrs.)	Discharge Time (Sec.)	Jet Length Throw (Meters)	Water Discharge	Test Pressure Kg/Cm ²	Gas Cartridge Used/Cylinder
W/CO ₂ 50 Ltr.	60-180	10	95%	35	300gms./2 Kg.

Capacity (Ltrs.)	Discharge Time (Sec.)	Jet Length Throw (Meters)	Water Discharge	Test Pressure Kg/Cm ²	Gas Cartridge Used/Cylinder
M/Foam 50 Ltr.	40-180	10	90%	35	300gms./2 Kg.

AUTOMATIC MODULAR TYPE FIRE EXTINGUISHERS

ATASEE
LET THE FIRE BEWARE

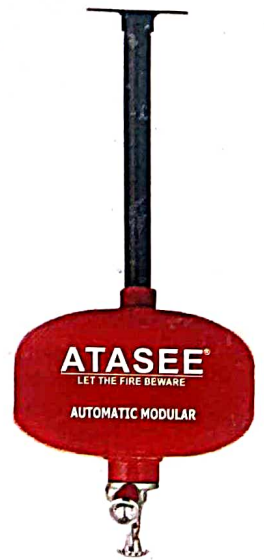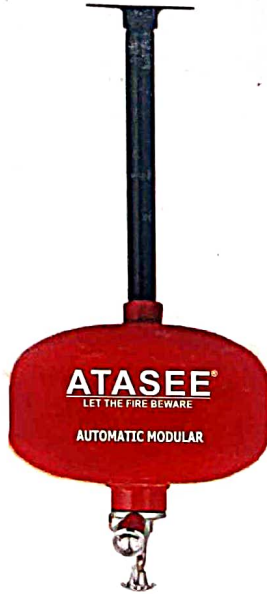

AVAILABLE IN : ABC POWDER , BC POWDER , CLEAN AGENT
CAPACITY : 2KG , 5KG , 10KG

FIRE FIGHTING CHEMICAL AND POWDERS

IS:4989



CM/L-9996124




AFFF FOAM

IS:4308



CM/L-9994120



**DRY CHEMICAL
POWDER BC TYPE**

IS:14609



CM/L-4802864



**DRY CHEMICAL
POWDER ABC TYPE**

