


# AMCO ALUMINUM DIE-CAST LED REFLECTOR

## STREET LIGHT (LED)




| AMCO Model    | Power |
|---------------|-------|
| D3AL(LED)-30W | 30W   |
| D3AL(LED)-50W | 50W   |

| Specification              |                     |
|----------------------------|---------------------|
| Input Voltage              | AC90 - 260V 50/60Hz |
| Light Efficiency           | 95- 100Lm/W         |
| Color Temperature          | 3000K/4500K/6000K   |
| Operating Temperature      | -40°C - +60°C       |
| Power Factor               | >0.95               |
| Color Rendering Index (Ra) | >72                 |
| Viewing Angle              | 120°                |
| IP Grade                   | IP65                |

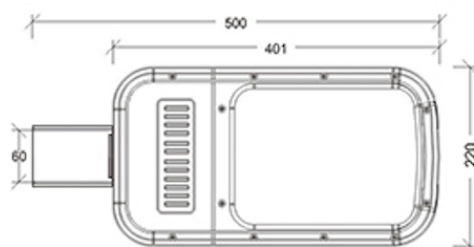

| AMCO Model     | Power |
|----------------|-------|
| D3AL(LED)-60W  | 60W   |
| D3AL(LED)-80W  | 80W   |
| D3AL(LED)-120W | 120W  |

| Specification              |                     |
|----------------------------|---------------------|
| Input Voltage              | AC90 - 260V 50/60Hz |
| Light Efficiency           | 95- 100Lm/W         |
| Color Temperature          | 3000K/4500K/6000K   |
| Operating Temperature      | -40°C - +60°C       |
| Power Factor               | >0.95               |
| Color Rendering Index (Ra) | >72                 |
| Viewing Angle              | 120°                |
| IP Grade                   | IP65                |

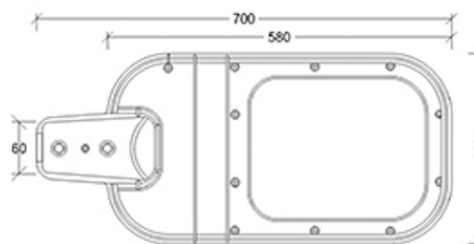

| AMCO Model     | Power |
|----------------|-------|
| D3AL(LED)-140W | 140W  |
| D3AL(LED)-160W | 160W  |
| D3AL(LED)-180W | 180W  |

| Specification              |                     |
|----------------------------|---------------------|
| Input Voltage              | AC90 - 260V 50/60Hz |
| Light Efficiency           | 95- 100Lm/W         |
| Color Temperature          | 3000K/4500K/6000K   |
| Operating Temperature      | -40°C - +60°C       |
| Power Factor               | >0.95               |
| Color Rendering Index (Ra) | >72                 |
| Viewing Angle              | 120°                |
| IP Grade                   | IP65                |

