



ELEMENTS STRIPES & SOLIDS




ELEMENTS



100 % PREMIUM ACRYLIC THE PERFECT COMBINATION OF TOP QUALITY DESIGN AND TECHNICAL FUNCTIONALITY

Sattler exclusively uses solution-dyed premium acrylic for its awning fabrics. Following our recommended care and maintenance program will ensure years of performance, even in the harshest outdoor environments.





AWNINGS FROM SATTLER SOLUTION-DYED ACRYLIC ENSURE QUALITY IN EVERY FIBRE.

Solution-dyed means that the pigment is already added to the yarn during the manufacturing process. Therefore, colours are stronger and last longer with Sattler fabrics.

With inherent UV resistance, solution dyed acrylics ensure years of outdoor performance and stability.

Combined with TEXgard, Sattler's exclusive finish acts as a protective shield to the fabric, water beads off the surface and provides a dirt resistant finish.

In our ELEMENTS range, **textured acrylic yarns** are woven together. This creates a unique textile character.

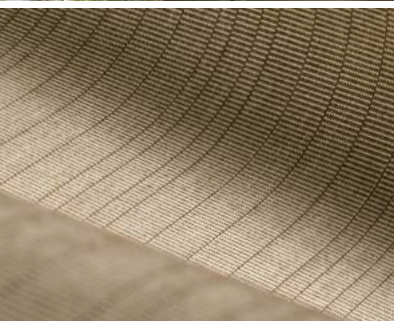

100 % ACRYLIC STAPLE FIBRE

ELEMENTS STRIPES



320 930
Wheat



320 931
Seagrass



320 973
Botany



320 953
Breezy



320 992
Darwin



320 923
Seagull




320 925
Flint



320 974
Melbourne



320 954
Portland



320 993
Dubbo




320 994
Karratha



320 671
Tamborine



364 598
Emerald



320 715
Morocca



320 556
Cairns



320 820
Devonport



320 812
Newcastle



315 052
Yellow White



315 167
Red White



315 422
Blue White



315 105
Black White



Sattler quality awning fabrics are the result of years of continuous research and development.



Outstanding water, dirt and fungal repellency. Easy clean performance that helps your awning perform for years to come.




"Sattler Design-Selector" helps you to make a fast and convenient pre-selector of your favorite designs.



Quality in every fibre. Our top quality awning fabrics are made from 100 % solution dyed acrylic.



Tested to the worlds strictest UV standard 801, skin protection is the aim.



With energy savings of 80% possible, Sattler awning fabrics are the smart solution.



Environment & Sustainability: certified according to ISO 14001 & Öko-Tex




10 year warranty on functionality, durability and colour fastness on all fabrics. For peace of mind performance. Ask your consultant for further information.

ELEMENTS SOLIDS



314 010
White



314 028
Kembla




314 941
Pewter



314 364
Stawell



314 051
Stradbroke



314 083
Hammersley



314 085
Bourke



314 398
Charcoal



314 402
Meteor



314 638
Pepper



314 154
Black



314 403
Cappuccino



314 819
Stone



314 917
Toffee



314 016
Chocolate



314 020
Linen



314 919
Toast



314 814
Beach



314 851
Smooth Cream



314 325
Parchment



314 003
Yellow



314 001
Red



314 347
Crimson



314 763
Burgundy



314 624
Wilderness



314 362
Heritage Green



314 546
Denim



314 414
Ocean



314 006
Regal Blue



FACTS

QUALITY

314 / 315 / 320 / 364 ELEMENTS

APPLICATIONS



Retractable awning



Basket awning



Sun sail



Umbrella



Drop blind



Conservatory awnings

| | | |
|---------------------------|------------------------------|--------------------|
| Base fabric | 100 % PAN | DIN 60 001 |
| Width | 120 cm | |
| Tensile strength warp | 145 daN/5 cm | DIN EN ISO 13934-1 |
| Tensile strength weft | 100 daN/5 cm | DIN EN ISO 13934-1 |
| Light fastness | min. 7/8* | DIN EN ISO 105-B02 |
| Water repellency | Note: 100 | EN 24 920 |
| Water column | 370 mm | EN 20 811 |
| Weave | L 1/1 | DIN ISO 9354 |
| Total weight | 290 g/m ² | DIN EN 12127 |
| Weather fastness | ● min. 7/8* ● min. 4-5/5* | DIN EN ISO 105-B04 |
| Declaration of conformity | EN 13 561 | |



Oil and dirt repellency

* white on request

Note: Subject to change in view of technical upgrades. Values indicated without tolerance levels are nominal values with a tolerance range of ±5%. All data presented here is given to the best of our current knowledge for guidance purposes and is not legally binding.

Care & Cleaning



Never clean with high-pressure cleaners



Never roll up or fold whilst wet



Remove loose dirt regularly



Clean with a mild soapy water solution