



Outdoor Shades


Specialist in blinds


Made of durable materials to protect your space with waterproof, sun-proof, wind-proof and mildew-proof properties. Creates fly-free, bug-free enclosed patio space where you enjoy your outdoors without annoyance of sun, flies, heavy-weather conditions, wind. It is customizable to outdoor light and requirements.

Fabric Shading Effect

Display image of openness factor

Bigger openness factor, more transparency

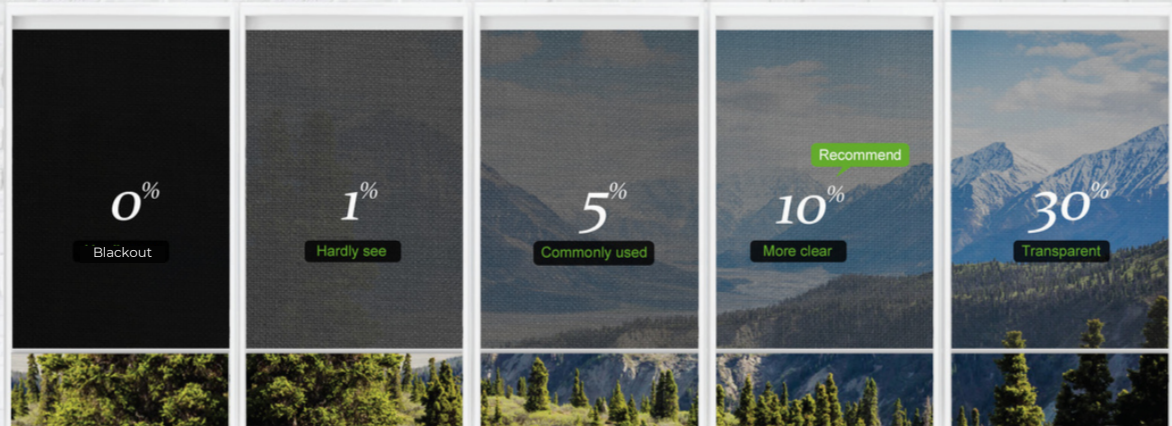


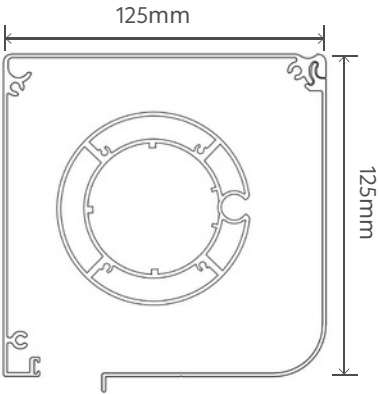

Cover Cap

A | ZS-125 series


680mm ≤ width ≤ 4500mm
500mm ≤ height ≤ 5600mm

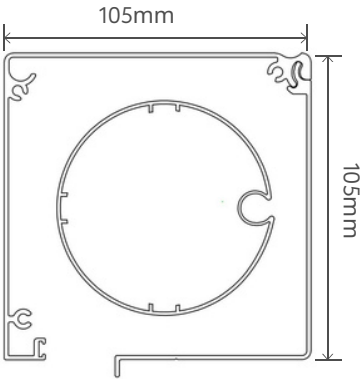

Cover Cap

B | ZS-105 series

680mm ≤ width ≤ 4000mm
500mm ≤ height ≤ 3000mm

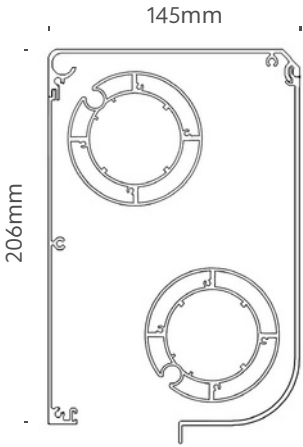


Cover Cap


C | ZS - double layer series

680mm ≤ width ≤ 4000mm
500mm ≤ height ≤ 3000mm


5 Size Roll Tubes Suitable
For Different Blind Sizes

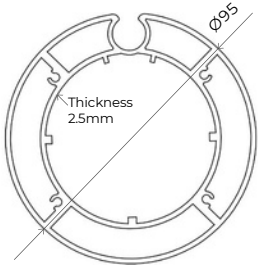


95 DAT




75 DAT



78 SAT




73 SAT



70 SAT

Solid And Durable

Oxidation-Resistant Coating
Color-Stable Finish

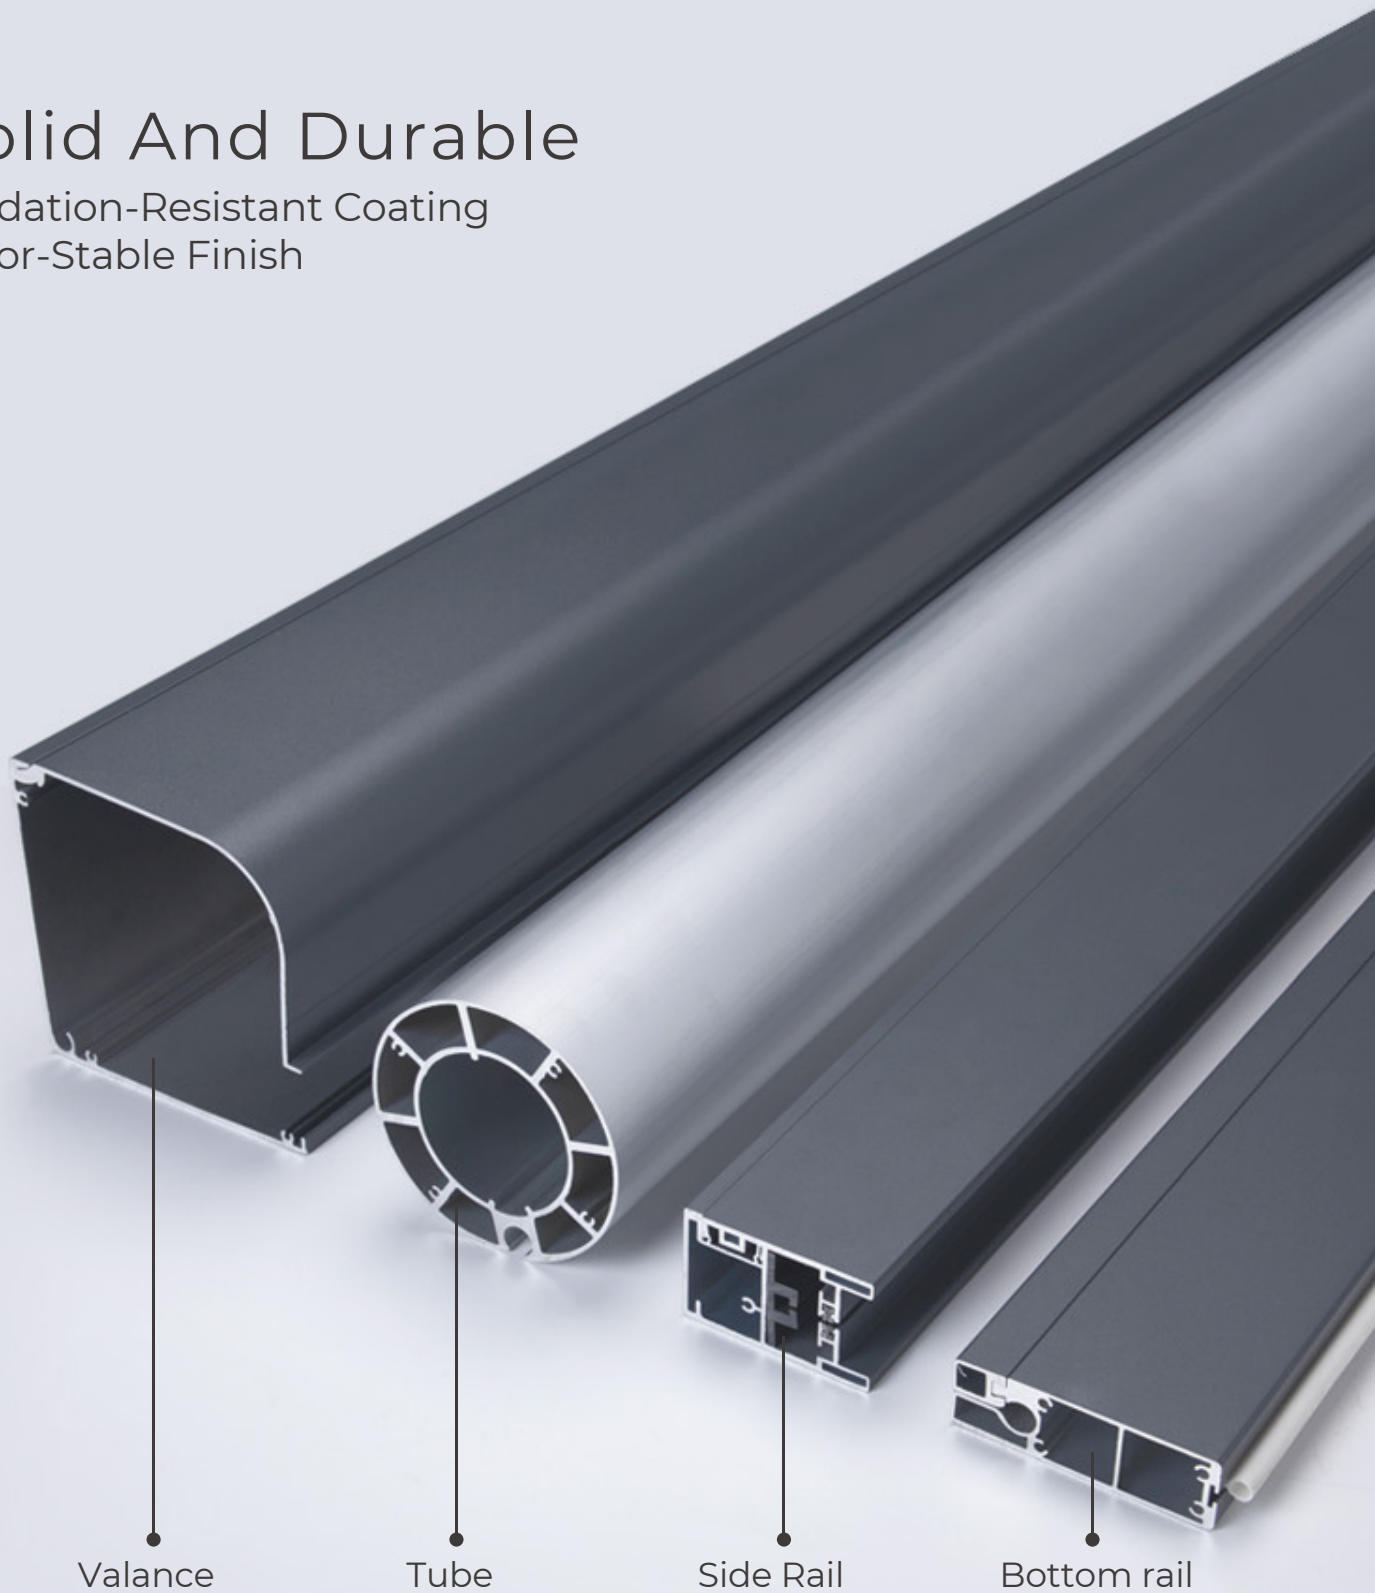


Valance

Tube


Side Rail

Bottom rail


Variations of Color Choices



Black



Coffee




Dark gray



Metallic Gray




Light gray



White




90° Corner Joint Solution

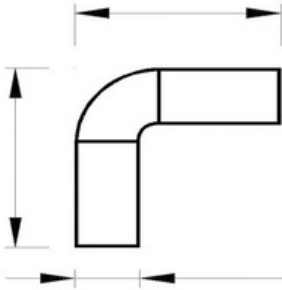

Applicable to 105/125 series, designed for precision alignment with frame edges.



Flat Surface Splice Solution

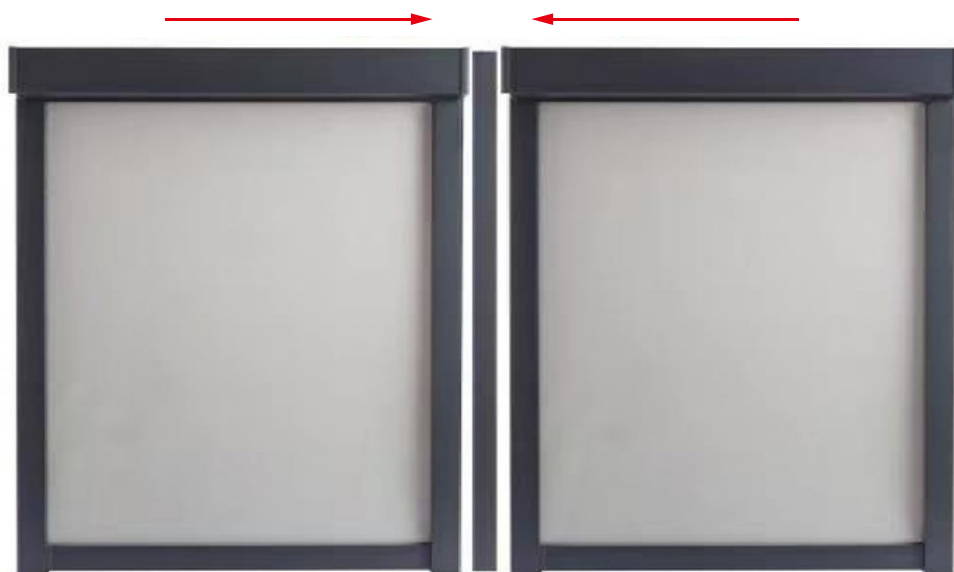


custom-engineered square tubes for structural integration



Control System



Remote Control

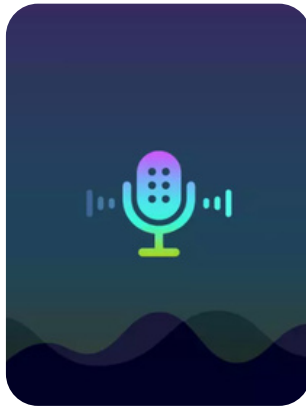

Voice Control with
Alexa or Google



Mobile APP for
automation or
scheduling



Wind-Light-Rain
Sensor
integration

Remote Control

One-touch operation | 3 preset modes | UV protection, sun shading, thermal insulation.

Voice Control

Hands-free smart control | Full remote functionality via voice commands.

Mobile APP

Remote access from anywhere | Hassle-free operation

Wind-Light-Rain Sensor

Automatically monitors wind force, light intensity, and rainfall | Syncs with smart hub for automated adjustments

Hardwired motor

110V or 220V




Cable Exit Options





Installation Options

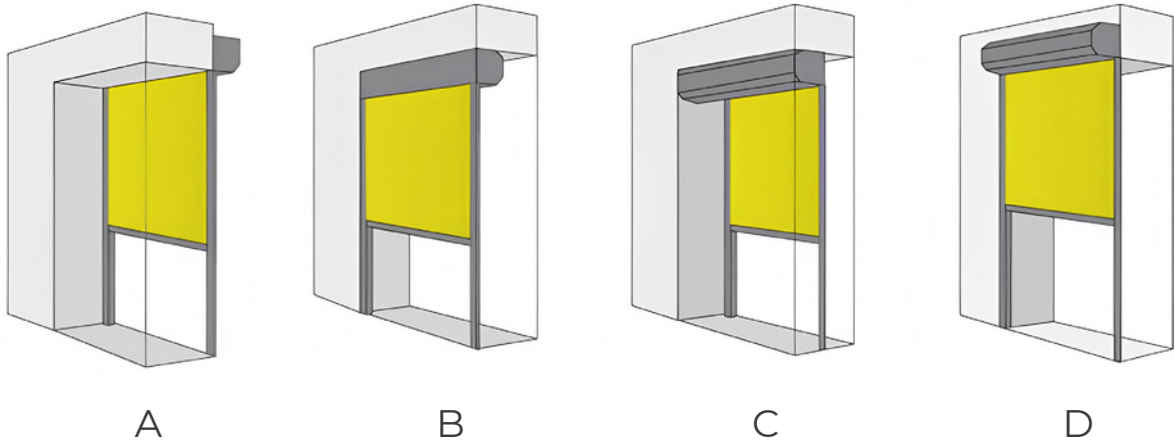

Installation Methods

