

Protector™ Series

Diesel Generator Set

1 of 18

INCLUDES:

- Two Line LCD Multilingual Digital Evolution™ Controller (English/Spanish/French/Portuguese) with external viewing window for easy indication of generator status and breaker position.
- Isochronous electronic governor
- Sound attenuated aluminum enclosure
- Smart battery charger
- UV / Ozone resistant hoses
- $\pm 1\%$ voltage regulation
- Integrated base tank options are available with run times over 90 hours without having to refuel*
- Five year limited warranty
- UL 2200 / UL142 / ULC S601 Listed
- Meets code requirements for external vent and fill

Standby Power Rating

Model RD015 - 15 kW 60 Hz
Model RD020 - 20 kW 60 Hz
Model RD030 - 30 kW 60 Hz
Model RD048 - 48 kW 60 Hz (single-phase only)
Model RD050 - 50 kW 60 Hz (three-phase only)



QUIET-TEST



*Assembled in the USA using domestic and foreign parts

Meets EPA Emission Regulations
CA/MA Emissions Compliant

* Time calculated at one-half maximum kW output.

FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**
 - ✓ PROTOTYPE TESTED
 - ✓ NEMA MG1-22 EVALUATION
 - ✓ SYSTEM TORSIONAL TESTED
 - ✓ MOTOR STARTING ABILITY
- **TRUE POWER™ ELECTRICAL TECHNOLOGY:** Superior harmonics and sine wave form produce less than 5% Total Harmonic Distortion for utility quality power. This allows confident operation of sensitive electronic equipment and micro-chip based appliances, such as variable speed HVAC systems.
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION:** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine. Digital voltage regulation at $\pm 1\%$.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's extensive dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component.
- **GENERAC TRANSFER SWITCHES:** Long life and reliability are synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line includes its own transfer systems and controls for total system compatibility.

15 • 20 • 30 • 48 • 50 kW

Application and Engineering Data

GENERATOR SPECIFICATIONS

Type	Synchronous
Rotor Insulation Class	H (15 & 20 kW) or F (30, 48, & 50 kW)
Stator Insulation Class	H
Telephone Interference Factor (TIF)	<50
Alternator Output Leads 1-Phase	Three wire
Alternator Output Leads 3-Phase	Six wire
Bearings	Single Sealed Cartridge
Coupling	Direct, Flexible Disc
Excitation System	Direct
Total Harmonic Distortion	< 5%

VOLTAGE REGULATION

Type	Electronic
Sensing	Single-phase
Regulation	± 1%
Features	Adjustable voltage & gain

GOVERNOR SPECIFICATIONS

Type	Electronic isochronous
Steady State Regulation	± 0.25%

ELECTRICAL SYSTEM

Battery Charge Alternator	50 amp (15 & 20 kW), 65 amp (30 kW), and 70 amp (48 & 50 kW)
Static Battery Charger	2 amp
Recommended Battery (battery not included)	Group 27F, 700 CCA Group 31, 925 CCA batteries can also be used with 30kW units
System Voltage	12 volts

ALTERNATOR SPECIFICATIONS

Revolving field heavy duty generator
 Directly connected to the engine
 Operating temperature rise 120 °C above a 40 °C ambient
 Class H insulation is NEMA rated
 Class F insulation is NEMA rated
 All models fully prototype tested

ENCLOSURE FEATURES

Aluminum weather protective enclosure	Provides protection against mother nature. Electrostatically applied textured epoxy paint for added durability.
Enclosed critical grade muffler	Quiet, critical grade muffler is mounted inside the unit to prevent injuries and maximize sound dampening.
Small, compact, attractive	Makes for an easy, eye appealing installation.
SAE	Sound attenuated enclosure ensures quiet operation.

15 • 20 • 30 • 48 • 50 kW

Application and Engineering Data

ENGINE SPECIFICATIONS: 15 & 20 kW

Make	Mitsubishi
Model	In-line
Cylinders	4
Displacement (Liters)	2.5
Bore (in / mm)	3.46 / 88
Stroke (in / mm)	4.06 / 103
Compression Ratio	22:1
Intake Air System	Naturally aspirated
Cylinder Head Type	Cast iron OHV
Piston Type	Aluminum

ENGINE SPECIFICATIONS: 30 kW

Make	Perkins
Model	In-line
Cylinders	4
Displacement (Liters)	2.2
Bore (in / mm)	3.30 / 84
Stroke (in / mm)	3.94 / 100
Compression Ratio	23.3:1
Intake Air System	Turbocharged / aftercooled
Cylinder Head Type	Cast iron OHV
Piston Type	Aluminum

ENGINE SPECIFICATIONS: 48 & 50 kW

Make	Generac
Model	In-line
Cylinders	4
Displacement (Liters)	3.4
Bore (in / mm)	3.86 / 98
Stroke (in / mm)	4.45 / 113
Compression Ratio	18.5:1
Intake Air System	Turbocharged / aftercooled
Cylinder Head Type	Cast iron OHV
Piston Type	Aluminum

ENGINE LUBRICATION SYSTEM

Oil Pump Type	Gear
Oil Filter Type	Full flow spin-on canister
Crankcase Capacity (quarts / Liters)	6.87 / 6.5—15 & 20 kW 11.2 / 10.6—30 kW 7.4 / 7—48 & 50 kW

ENGINE COOLING SYSTEM

Water Pump	Pre-lubed, self-sealing
Fan Speed (rpm)	2376—15 & 20 kW 1980—30 kW 2029—48 & 50 kW
Fan Diameter (in / mm)	18.11 / 460 (15 & 20 kW) 18 / 457.2 (30 kW) 22 / 559 (48 & 50 kW)
Fan Mode	Pusher

FUEL SYSTEM

Fuel Type	Ultra low sulfur diesel fuel
Fuel Pump Type	Mechanical engine driven gear
Injector Type	Mechanical
Fuel Supply Line (mm / in)	7.94 / 0.31 (ID)
Fuel Return Line (mm / in)	N/A—15 & 20 kW 4.76 / 0.19 (ID)—30 kW 7.94 / 0.31 (ID)—48 & 50 kW
Fuel Specification	ASTM
Fuel Filtering (microns)	6—15 & 20 kW 25—30 kW 10—48 & 50 kW

WEIGHTS AND DIMENSIONS

kW size	Tank size	Weight (lb / kg)	Dimensions (L x W x H) (in / cm)
15 kW	Extended	1528 / 693	81 x 31 x 51 / 206 x 79 x 129
	95 Gal	1757 / 797	81 x 31 x 61 / 206 x 79 x 165
20 kW	Extended	1528 / 693	81 x 31 x 51 / 206 x 79 x 129
	95 Gal	1757 / 797	81 x 31 x 61 / 206 x 79 x 165
30 kW	Extended	1857 / 842	95 x 35 x 59 / 241 x 89 x 150
	132 Gal	2070 / 939	95 x 35 x 68 / 241 x 89 x 173
48 & 50 kW	Extended	2197 / 997	95 x 35 x 57 / 241 x 89 x 145
	132 Gal	2410 / 1093	95 x 35 x 66 / 241 x 89 x 168

15 • 20 • 30 • 48 • 50 kW

Application and Engineering Data

TANK SPECIFICATIONS

kW size		Total Capacity		Usable Capacity		Run Time at 1/2 Load (hrs)
kW size	15 kW	Extended Tank (gal / L)	33.5 / 127	32 / 121		39
		95 Gal Tank (gal / L)	98.5 / 372.9	95 / 359.6		115.8
	20 kW	Extended Tank (gal / L)	33.5 / 127	32 / 121		31
		95 Gal Tank (gal / L)	98.5 / 372.9	95 / 359.6		92.2
	30 kW	Extended Tank (gal / L)	61 / 233	57 / 215		41.6
		132 Gal Tank (gal / L)	138.5 / 524	132 / 500		96.4
	48 & 50 kW	Extended Tank (gal / L)	62 / 234.7	57 / 215		25
		132 Gal Tank (gal / L)	138.5 / 524	132 / 500		61.4

GENERATOR OUTPUT VOLTAGE / KW-60 HZ

		kW (standby)	Amp (standby)	kW (Prime)	Amp (Prime)	CB Size
RD015	120/240 V, 1Ø, 1.0 pf	15	62	12	50	70
	120/208 V, 3Ø, 0.8 pf	15	52	12	42	60
	120/240 V, 3Ø, 0.8 pf	15	45	12	36	50
RD020	120/240 V, 1Ø, 1.0 pf	20	83	16	67	100
	120/208 V, 3Ø, 0.8 pf	20	69	16	56	80
	120/240 V, 3Ø, 0.8 pf	20	60	16	48	70
RD030	120/240 V, 1Ø, 1.0 pf	30	125	24	100	150
	120/208 V, 3Ø, 0.8 pf	30	104	24	83	125
	120/240 V, 3Ø, 0.8 pf	30	90	24	72	100
	277/480 V, 3Ø, 0.8 pf	30	45	24	36	50
RD048 RD050	120/240 V, 1Ø, 1.0 pf	48	200	38.4	183	200
	120/208 V, 3Ø, 0.8 pf	50	173	40	153	200
	120/240 V, 3Ø, 0.8 pf	50	150	40	132	175
	277/480 V, 3Ø, 0.8 pf	50	75	40	66	90

SURGE CAPACITY IN AMPS

		Voltage Dip @ < 0.4 pf	
		15%	30%
RD015	120/240 V, 1Ø	53	129
	120/208 V, 3Ø	37	90
	120/240 V, 3Ø	32	78
RD020	120/240 V, 1Ø	87	211
	120/208 V, 3Ø	59	143
	120/240 V, 3Ø	51	124
RD030	120/240 V, 1Ø	66	168
	120/208 V, 3Ø	59	144
	120/240 V, 3Ø	51	125
	277/480 V, 3Ø	26	64
RD048 RD050	120/240 V, 1Ø	69	189
	120/208 V, 3Ø	90	218
	120/240 V, 3Ø	78	189
	277/480 V, 3Ø	36	87

ENGINE FUEL CONSUMPTION

		gal / hr	L / hr
RD015	25% of rated load	0.60	2.27
	50% of rated load	0.85	3.22
	75% of rated load	1.10	4.16
	100% of rated load	1.46	5.53
RD020	25% of rated load	0.77	2.9
	50% of rated load	1.03	3.90
	75% of rated load	1.46	5.53
	100% of rated load	1.97	7.46
RD030	25% of rated load	0.97	3.67
	50% of rated load	1.37	5.19
	75% of rated load	1.97	7.46
	100% of rated load	2.77	10.49
RD048 RD050	25% of rated load	1.35	5.11
	50% of rated load	2.15	8.14
	75% of rated load	3.06	11.58
	100% of rated load	3.98	15.07

15 • 20 • 30 • 48 • 50 kW

ENGINE COOLING

	15 kW	20 kW	30 kW	48 kW & 50 kW
Air flow (inlet air including alternator and combustion air in cfm / cmm)	2750 / 78	2750 / 78	2800 / 79	2824 / 80
System coolant capacity (gal / Liters)	3.0 / 11.4	3.0 / 11.4	2.5 / 9.5	2.8 / 10.6
Heat rejection to coolant (BTU per hr / MJ per hr)	95,220 / 100.5	95,220 / 100.5	128,638 / 135.7	135,900 / 143.4
Maximum operation air temperature on radiator (°C / °F)	50 / 122			
Maximum ambient temperature (°C / °F)	50 / 122			

COMBUSTION REQUIREMENTS

Flow at rated power (cfm / cmm)	86.3 / 2.4	86.3 / 2.4	88 / 2.5	190 / 5.38
---------------------------------	------------	------------	----------	------------

SOUND EMISSIONS

Sound output in dB(A) at 23 ft (7 m) with generator in exercise mode*	65			
Sound output in dB(A) at 23 ft (7 m) with generator operating at normal load*	70			

EXHAUST

Exhaust flow at rated output (cfm / cmm)	98.88 / 2.8	98.88 / 2.8	296.6 / 8.4	448 / 12.7
Exhaust temperature at rated output (°C / °F)	482 / 900	482 / 900	499 / 930	604.4 / 1,120

ENGINE PARAMETERS

Rated Synchronous Rpm	1800			
HP at rated kW	26.4	33.5	49	85

POWER ADJUSTMENT FOR AMBIENT CONDITIONS

Temperature Deration	3% for every 5 °C above 25 °C or 1.7% for every 5 °F above 77 °F
Altitude Deration (15, 30, 48, and 50 kW)	1% for every 100 m above 915 m or 3% for every 1,000 ft above 3,000 ft
Altitude Deration (20 kW)	1% for every 100 m above 305 m or 3% for every 1,000 ft above 1,000 ft

CONTROLLER FEATURES

2-Line Plain Text Multilingual LCD Display	Simple user interface for ease of operation
Mode Buttons: Auto	Automatic Start on Utility failure. Programmable 7 day exerciser
Manual	Start with starter control, unit stays on. If utility fails, transfer to load takes place
Off	Stops unit. Power is removed. Control and charger still operate
Ready to Run/Maintenance Message	Standard
Engine Run Hours Indication	Standard
Programmable start delay between 2-1500 seconds	Standard (programmable by dealer only)
Utility Voltage Loss/Return to Utility Adjustable	From 140-171 V/190-216 V
Future Set Capable Exerciser/Exercise Set Error Warning	Standard
Run/Alarm/Maintenance Logs	50 Events Each
Engine Start Sequence	Cyclic cranking: 16 sec on, 7 rest (90 sec maximum duration)
Starter Lock-out	Starter cannot re-engage until 5 seconds after engine has stopped
Smart Battery Charger	Standard
Charger Fault/Missing AC Warning	Standard
Low Battery/Battery Problem Protection and Battery Condition Indication	Standard
Automatic Voltage Regulation with Over and Under Voltage Protection	Standard
Under-Frequency/Overload/Stepper Overcurrent Protection	Standard
Safety Fused/Fuse Problem Protection	Standard
Automatic Low Oil Pressure	Standard
Overcrank/Overspeed (@ 72 Hz)/rpm Sense Loss Shutdown	Standard
High Engine Temperature Shutdown	Standard
Internal Fault/Incorrect Wiring Protection	Standard
Common External Fault Capability	Standard
Field Upgradeable Firmware	Standard
Low Coolant Level Shutdown	Standard

15 • 20 • 30 • 48 • 50 kW

D2.5L G2 Extended Tank (1 of 2)

SERVICE ITEM		2.5L
OIL FILL CAP		RIGHT SIDE
OIL DIP STICK		RIGHT SIDE
OIL FILTER		RIGHT SIDE
OIL DRAIN HOSE		LEFT SIDE
RADIATOR DRAIN HOSE		LEFT SIDE
COOLANT RECOVERY BOTTLE		LEFT SIDE
RADIATOR FILL CAP ACCESS		ROOF
AIR CLEANER ELEMENT		LEFT SIDE
MUFFLER		FRONT
PAN BELT		RIGHT SIDE
BATTERY		LEFT SIDE

WEIGHT DATA WITH EMPTY BASE TANK (SEE NOTE 5)

GENERATOR AS SHOWN	893 [1528]
WITH WOODEN SHIPPING SKID	731.6 [1600]

WITH WOODEN SHIPPING SKID [731.6 [1600]]





WEIGHT, KG (LBS)

DIMENSIONS, MM (INCH)

SERVICE ITEM	2.5L
OIL FILL CAP	RIGHT SIDE
OIL DIP STICK	RIGHT SIDE
OIL FILTER	RIGHT SIDE
OIL DRAIN HOSE	LEFT SIDE
RADIATOR DRAIN HOSE	LEFT SIDE
COOLANT RECOVERY BOTTLE	LEFT SIDE
RADIATOR FILL CAP ACCESS	LEFT SIDE
AIR CLEANER ELEMENT	ROOF
MUFFLER	FRONT
FAN BELT	FRONT
BATTERY	EITHER SIDE
	LEFT SIDE


REFERENCE OWNERS MANUAL FOR PERIODIC REPLACEMENT PART LISTINGS.

LT
UND

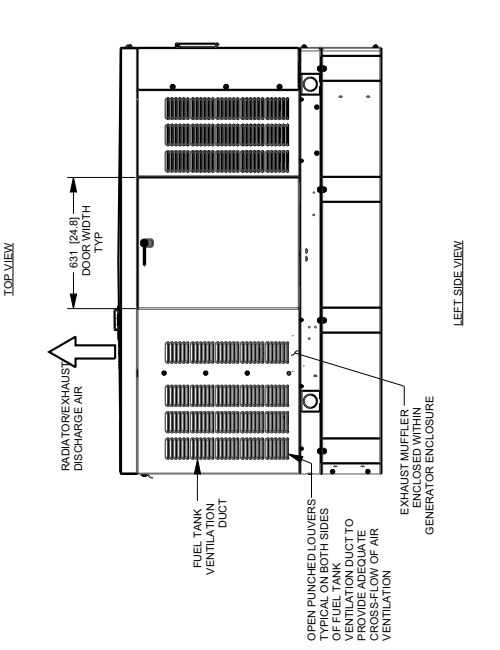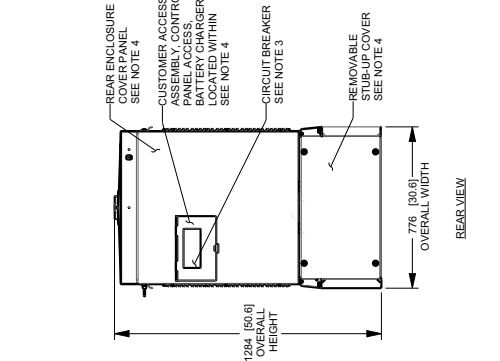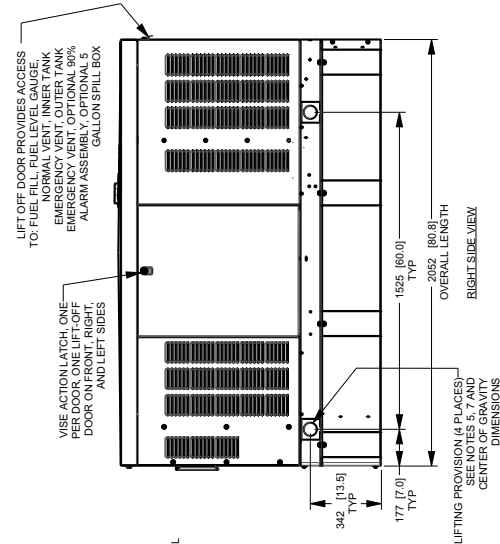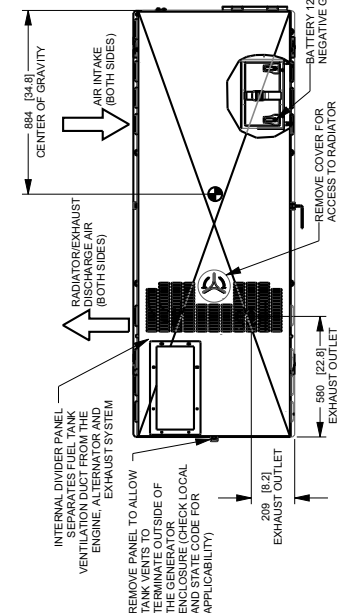


15 • 20 • 30 • 48 • 50 kW

D2.5L G2 Extended Tank (2 of 2)

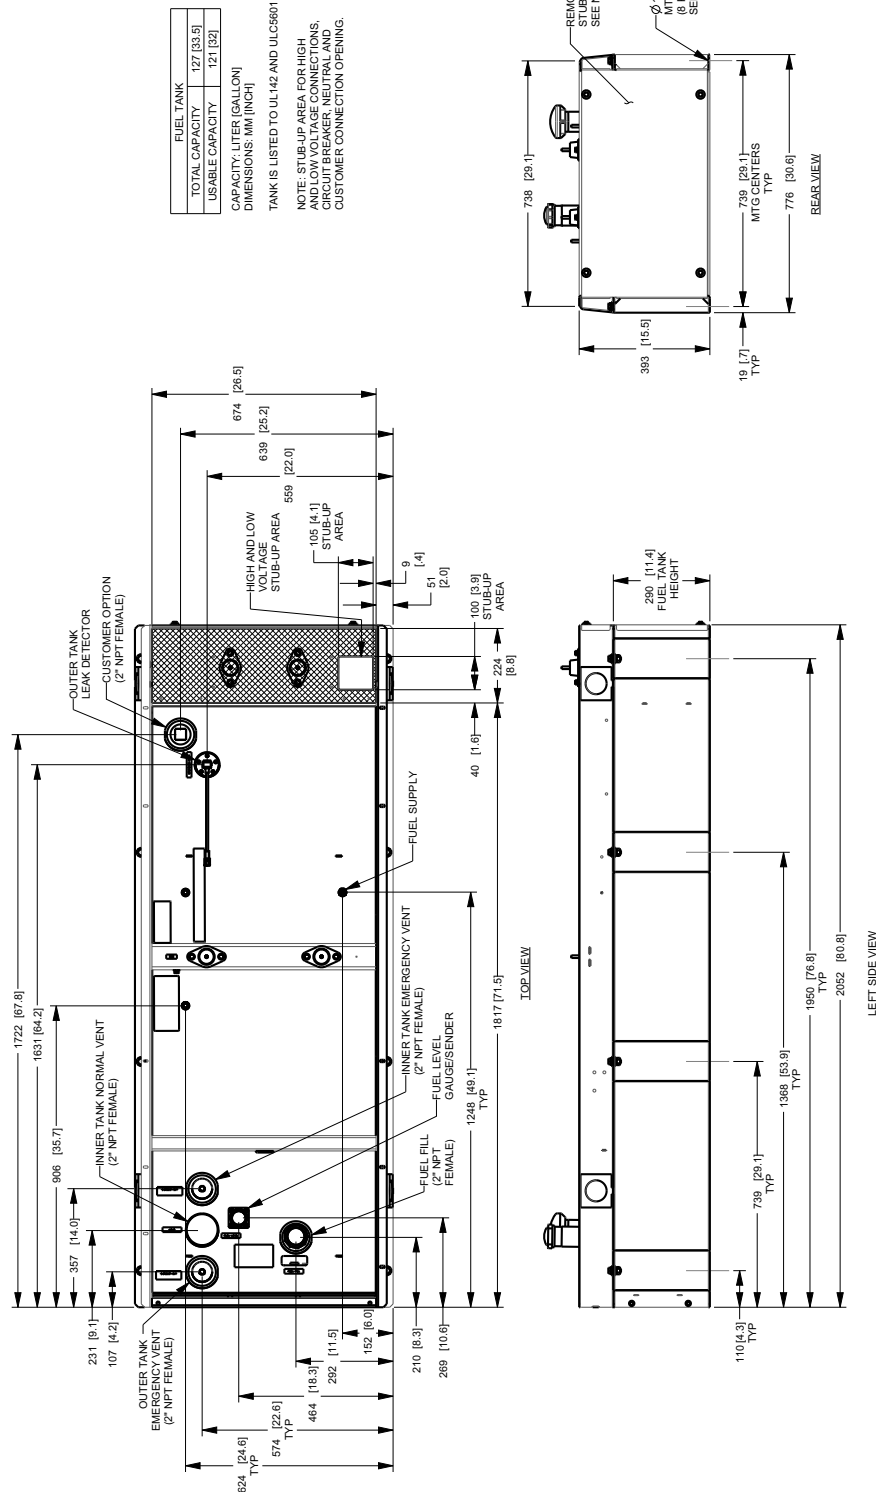


15 • 20 • 30 • 48 • 50 kW

D2.5L G2 95 Gal Tank (1 of 2)

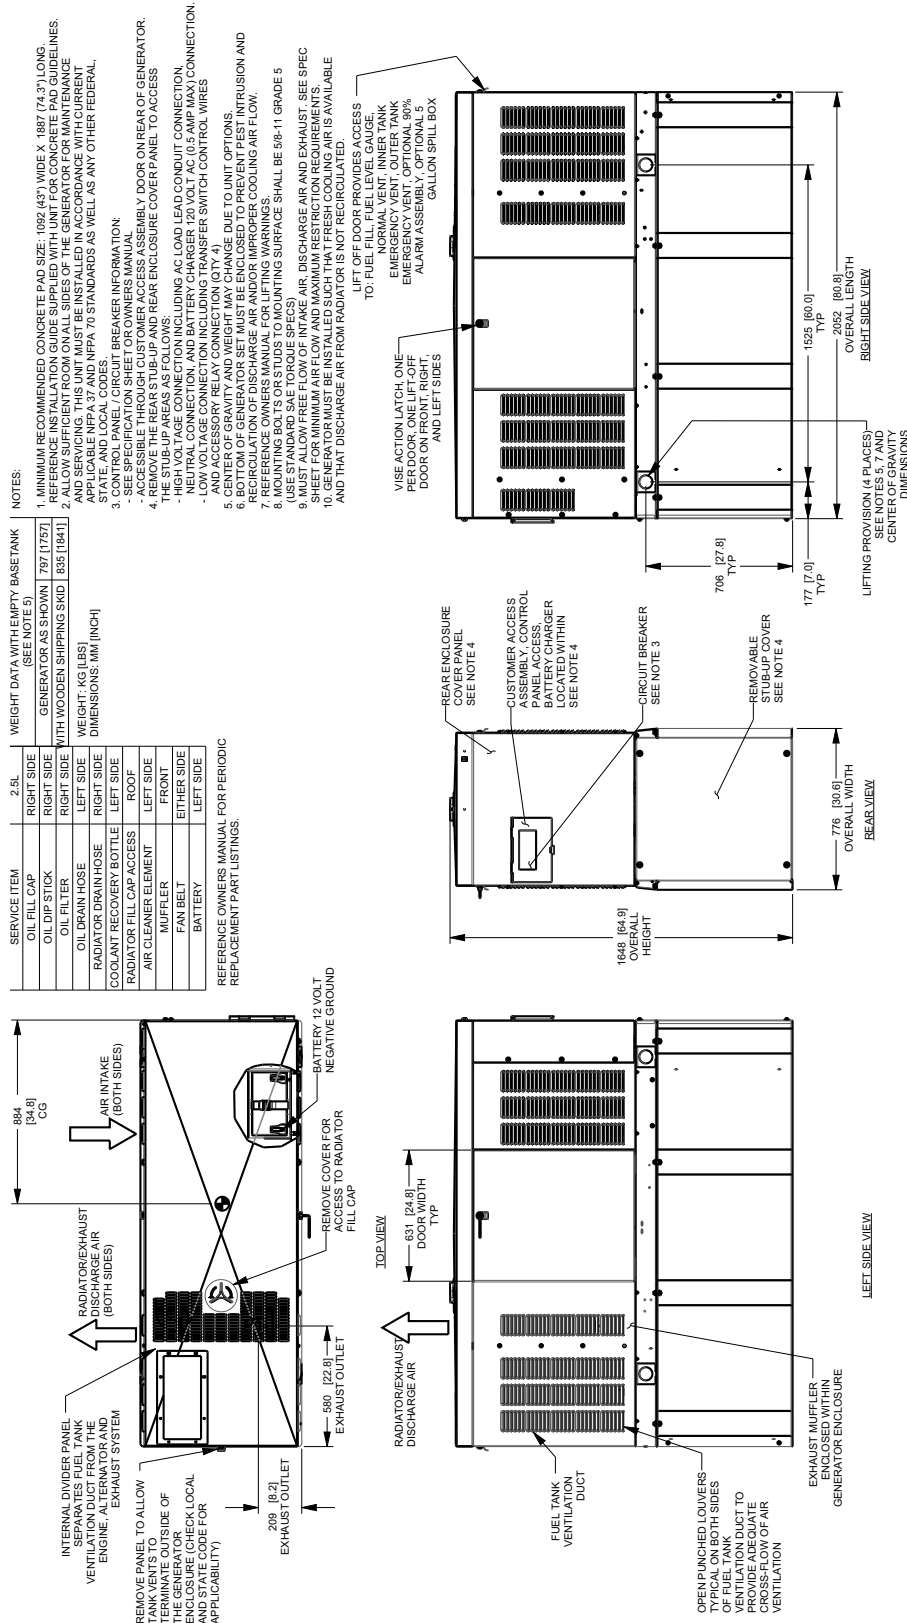

15 • 20 • 30 • 48 • 50 kW

D2.5L G2 95 Gal Tank (2 of 2)

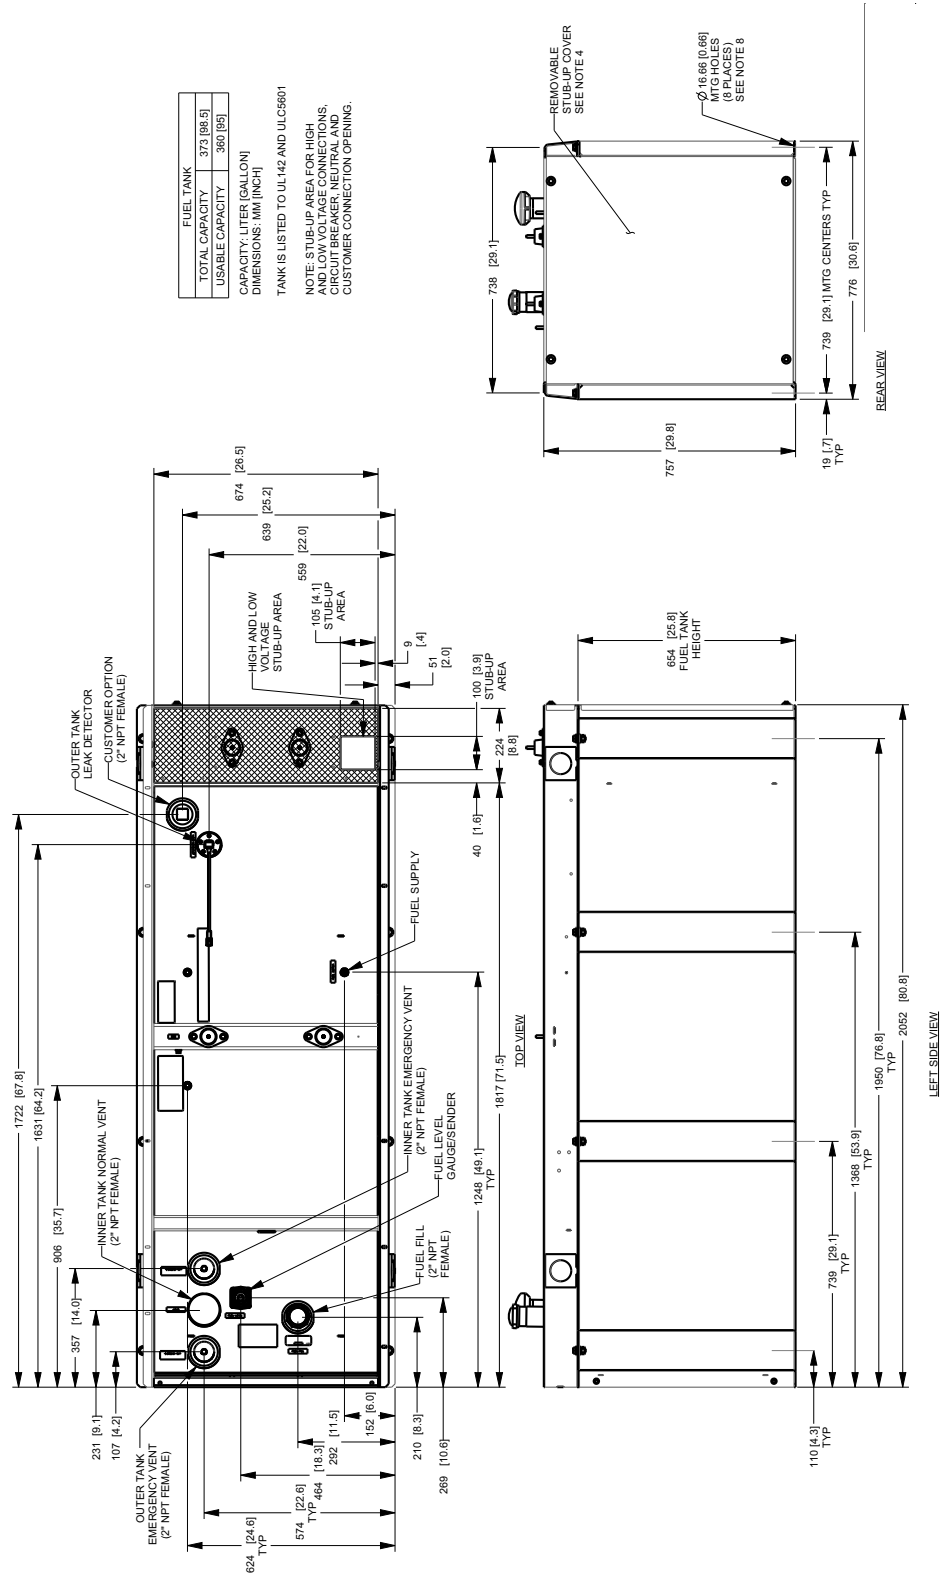



D2.2L G22 Extended Tank (1 of 2)

2.2L		WEIGHT DATA WITH EMPTY BASE TANK (SEE NOTE 5)	
SERVICE ITEM	RIGHT SIDE	GENERATOR AS SHOWN	842 (1857)
OIL FILL CAP	RIGHT SIDE	WITH WOODEN SHIPPING SKID	888 (1957)
OIL DIP STICK	RIGHT SIDE		
OIL FILTER	RIGHT SIDE		
OIL DRAIN HOSE	RIGHT SIDE	WEIGHT: KG (LBS)	
RADIATOR DRAIN HOSE	LEFT SIDE	DIMENSIONS: MM (INCH)	
COOLANT RECOVERY BOTTLE	LEFT SIDE		
RADIATOR FILL CAP ACCESS	ROOF		
AIR CLEANER ELEMENT	RIGHT SIDE		
MUFFLER	FRONT SIDE		
FAN BELT	EITHER SIDE		
BATTERY	LEFT SIDE		

REFERENCE OWNERS MANUAL FOR PERIODIC REPLACEMENT PART LISTINGS


NOTES:

- MINIMUM RECOMMENDED CONCRETE PAD SIZE:** 1'14" (47") WIDE X 2'26" (89") LONG.
REFERENCE INSTALLATION GUIDE SUPPLIED WITH UNIT
- FOR CONCRETE PAD GUIDELINES**
- ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICE ACCESS TO THE GENERATOR.
 - USE A MINIMUM OF TWO INCHES OF CONCRETE UNDER THE GENERATOR.
 - STATE AND LOCAL CODES.
 - SEE SPECIFICATION SHEET OR OWNERS MANUAL.
 - PROVIDE THROUGH CUSTOMER ACCESS ASSEMBLY / DOOR ON REAR OF GENERATOR
- CONTROL PANEL / CIRCUIT BREAKER INFORMATION**
- REMOVE THE REAR TANK AND REAR ENCLOSURE COVER PANEL TO ACCESS THE SUB-UP AREAS AS FOLLOWS:
 - LOW VOLTAGE CONNECTIONS INCLUDING TRANSFER SWITCH CONTROL WIRES
 - NEUTRAL CONNECTION BATTERY AGC LOAD CABLE CONNECTION
 - LOW VOLTAGE CONNECTIONS INCLUDING TRANSFER SWITCH CONTROL WIRES
 - CENTER OF GRAVITY AND WEIGHT MAY CHANGE DUE TO UNIT OPTIONS.
 - ENGINE SERVICE CONNECTIONS
- EXHAUST OUTLET: 7" OD.**
- BOTTOM OF GENERATOR SET MUST BE ENCLOSED TO PREVENT PEST INFILTRATION AND RECIRCULATION OF DISCHARGE AIR AND/OR IMPROPER COOLING AIR FLOW.
 - PROVIDE OTHER PROTECTIVE MEASURES TO PREVENT PEST INFILTRATION.
 - INSULATING FOAM IS REQUIRED TO BE INSTALLED TO THE EXHAUST OUTLET.
 - INSULATING FOAM IS REQUIRED TO BE INSTALLED TO THE EXHAUST OUTLET SHALL BE 58-1 GRADE 5 (USE STANDARD SASI TORQUE SPECS)

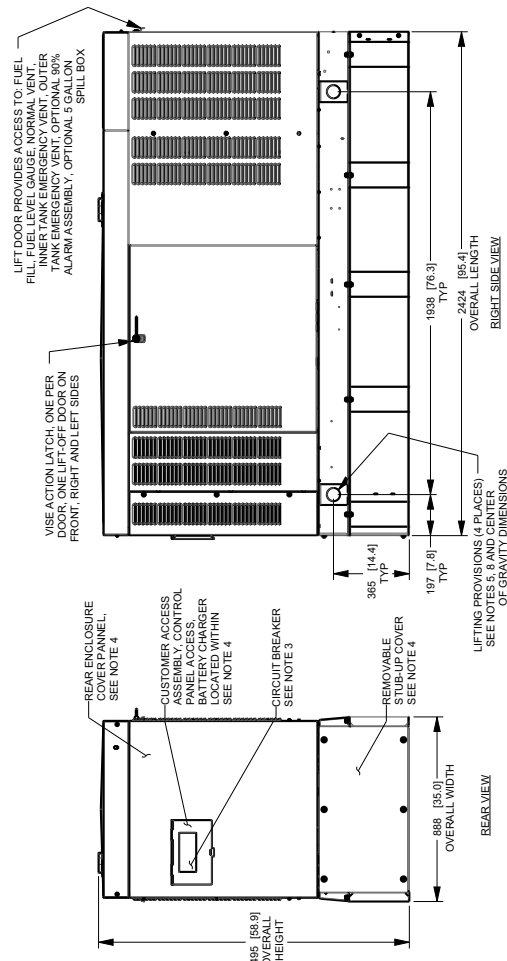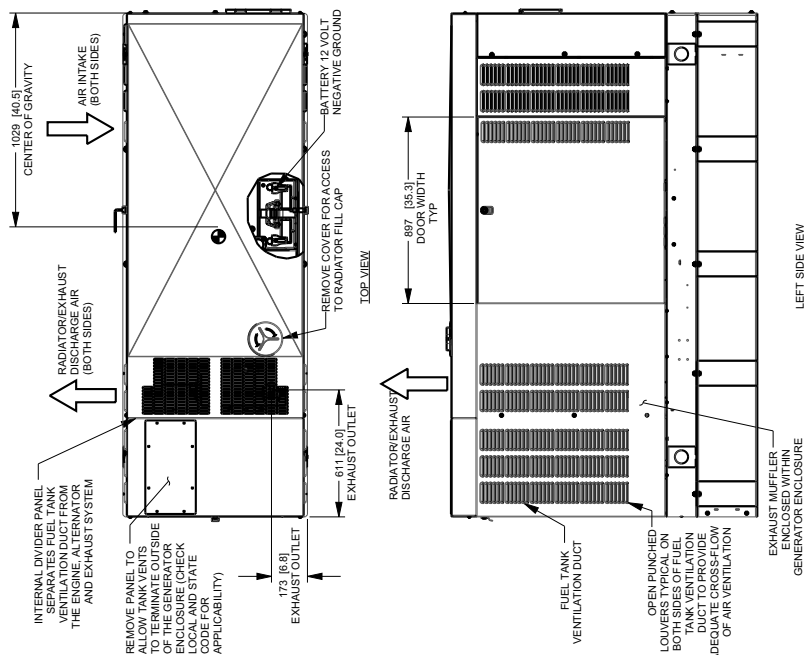

15 • 20 • 30 • 48 • 50 kW


D2.2L G22 Extended Tank (2 of 2)

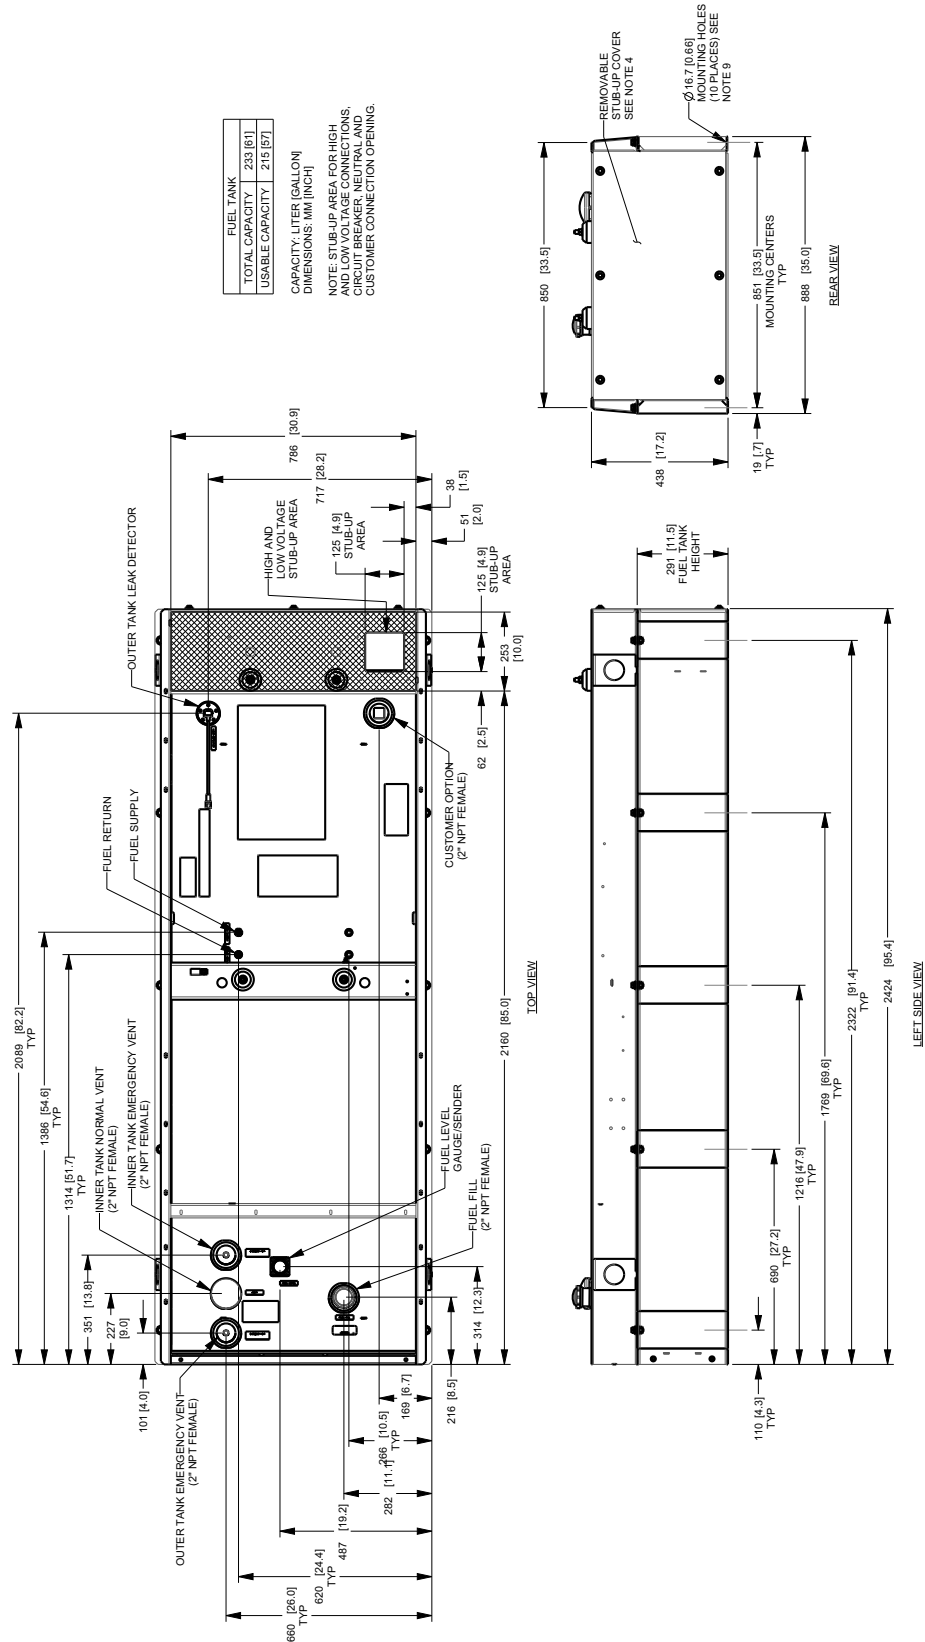

D2.2L G22 132 Gal Tank (1 of 2)


Diagram illustrating the generator enclosure layout and access points:

- INTERNAL DIVIDER PANEL**: SEPARATES FUEL TANK FROM THE ENGINE, ALTERNATOR AND EXHAUST SYSTEM.
- REMOVE PANEL TO DISCONNECT FUEL TANK TO EXHAUST OUTSIDE OF THE GENERATOR ENCLOSURE (CHECK LOCAL AND STATE REGULATIONS FOR APPLICABILITY)**.
- EXHAUST OUTLET**: 173 [6.8] inches.
- EXHAUST OUTLET**: 611 [24.0] inches.
- REMOVE COVER FOR ACCESS TO RADIATOR FILL CAP**.
- BATTERY 12 VOLT NEGATIVE GROUND**.
- RADIATOR/EXHAUST DISCHARGE AIR (BOTH SIDES)**.
- AIR INTAKE (BOTH SIDES)**.
- CENTER OF GRAVITY**: 1029 [40.5] inches.

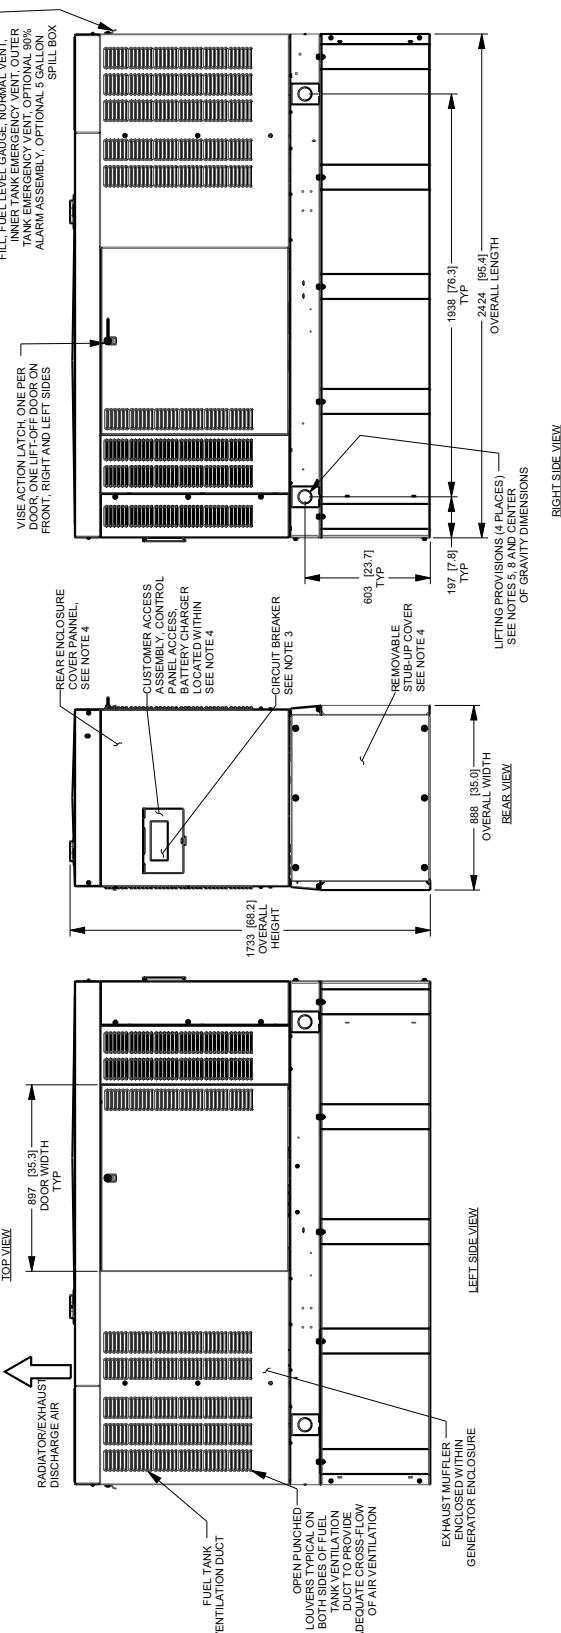

15 • 20 • 30 • 48 • 50 kW

D2.2L G22 132 Gal Tank (2 of 2)

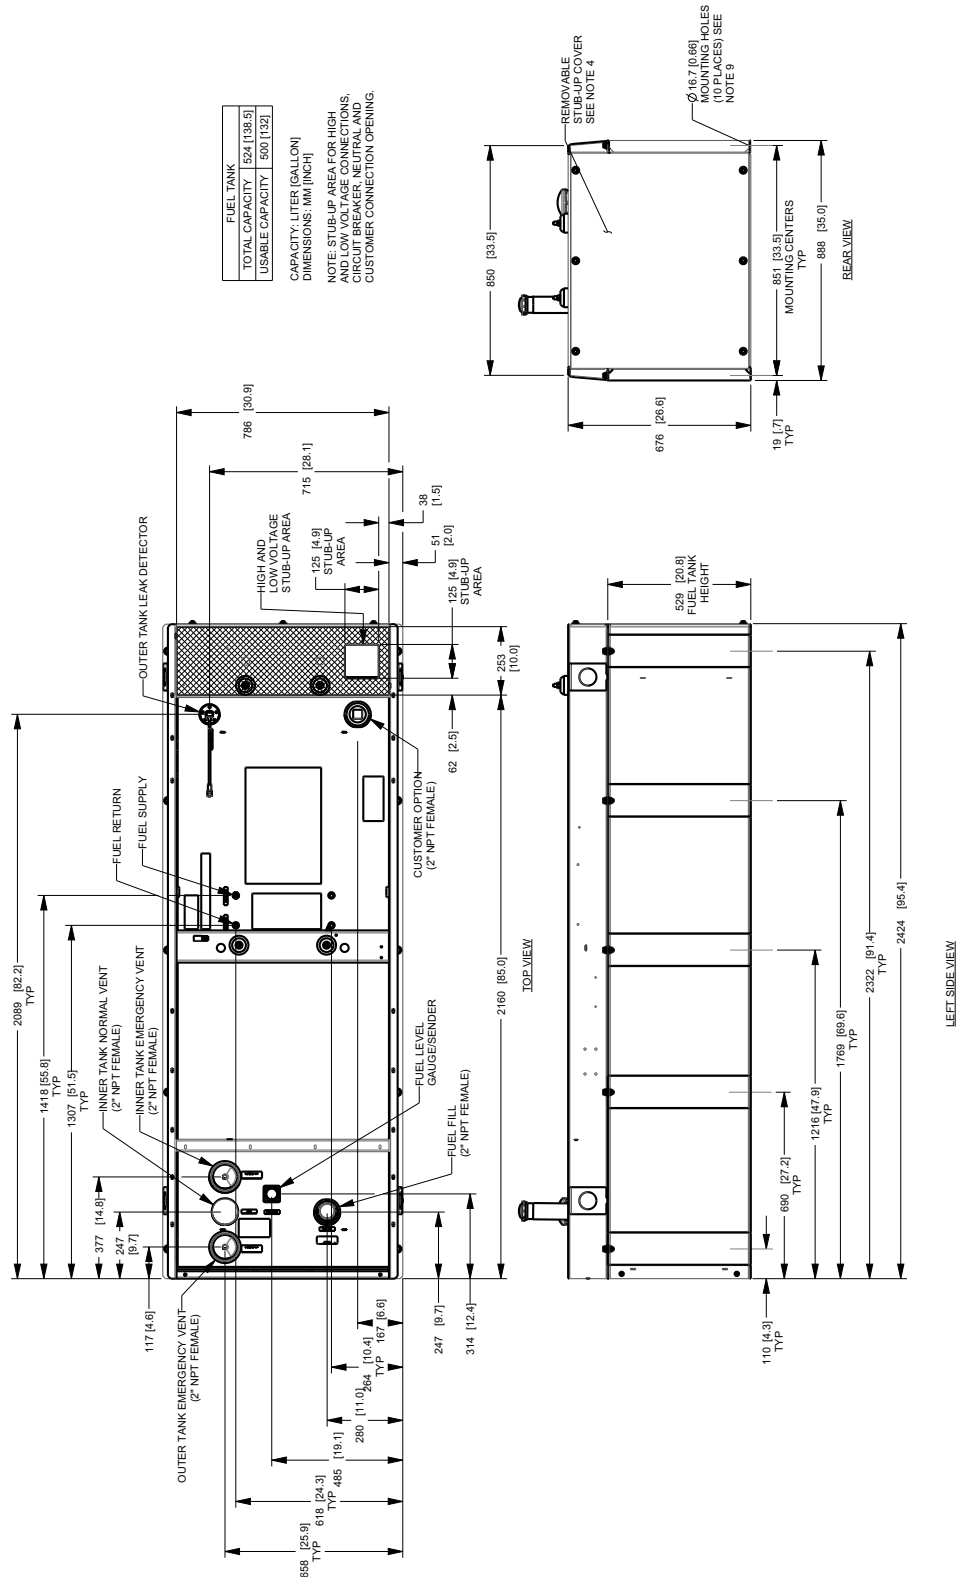


15 • 20 • 30 • 48 • 50 kW

GENERAC®

Installation Drawings

D3.4L Extended Tank (1 of 2)

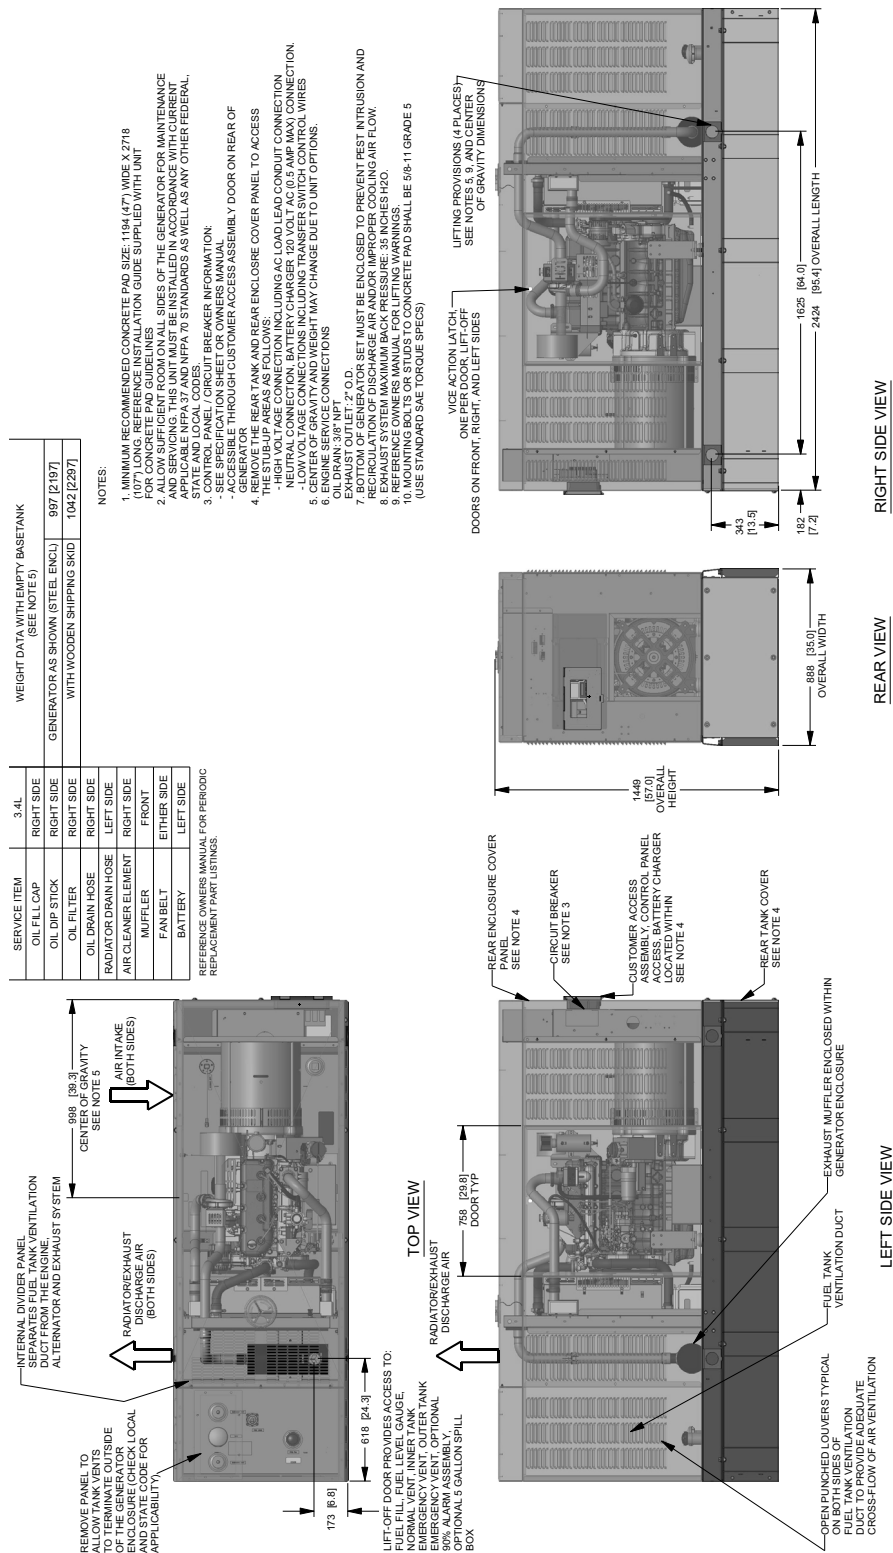



15 • 20 • 30 • 48 • 50 kW

D3.4L Extended Tank (2 of 2)

FUEL TANK	
TOTAL CAPACITY	233 [61]
USABLE CAPACITY	209 [55]
CAPACITY - LITER (GALLONS)	
DIMENSIONS - MM (INCH)	


THIS TANK IS LISTED TO UL142 AND ULC6601

*NOTE - STUB-UP AREA FOR HIGH AND LOW VOLTAGE CONNECTIONS, CIRCUIT BREAKER, NEUTRAL AND CUSTOMER CONNECTION OPENING.

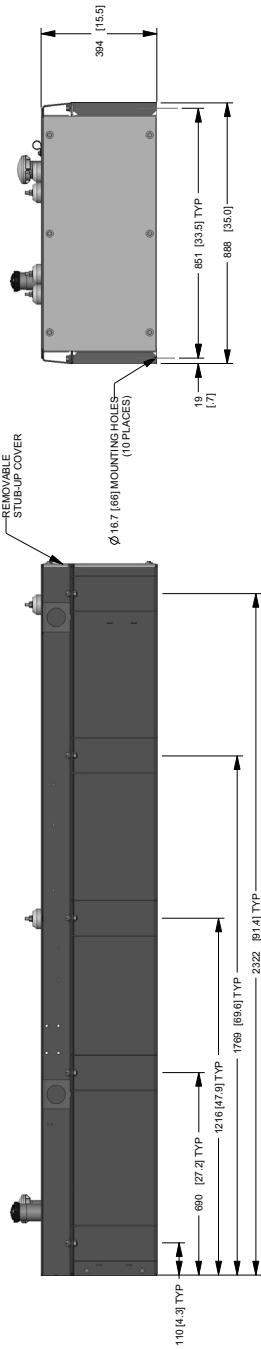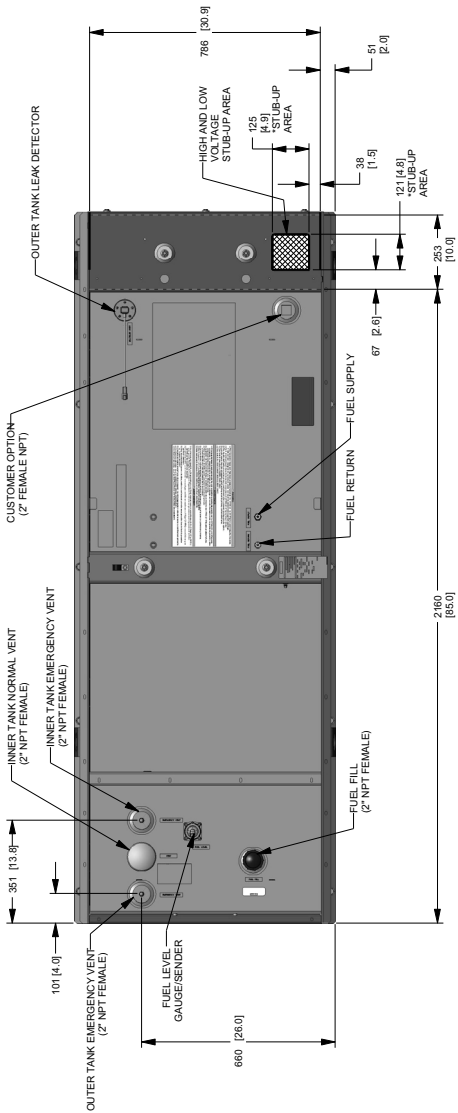

15 • 20 • 30 • 48 • 50 kW

D3.4L G16 132 Gal Tank (1 of 2)

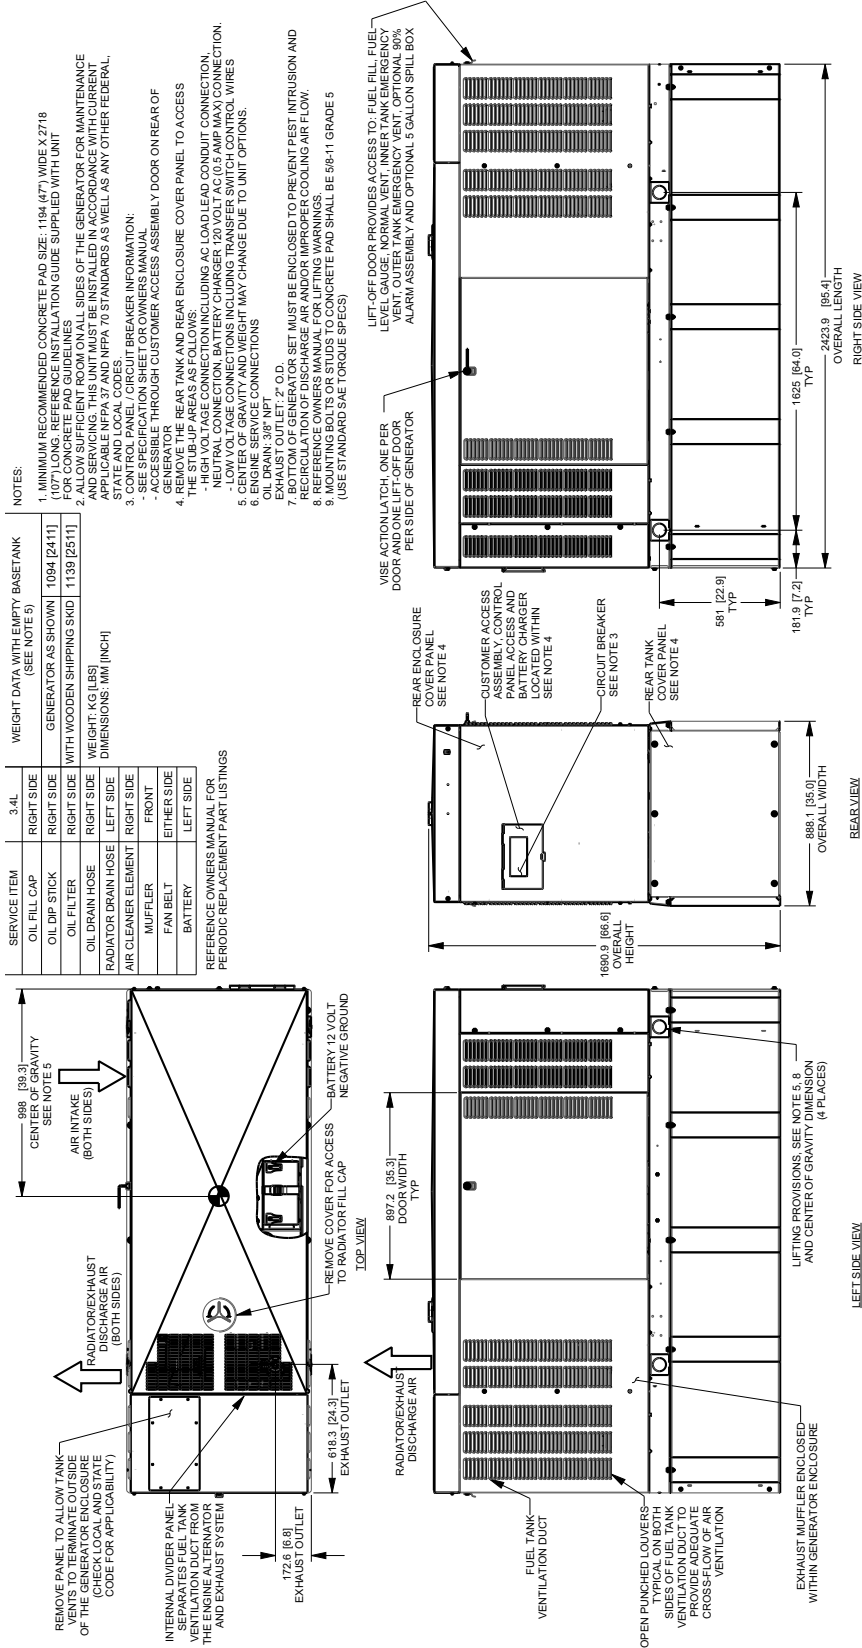

15 • 20 • 30 • 48 • 50 kW


D3.4L G16 132 Gal Tank (2 of 2)

FUEL TANK	
TOTAL CAPACITY	524 [138.5]
USABLE CAPACITY	500 [132]

CAPACITY: LITER (GALLONS)
DIMENSIONS: MIN (INCH)

THIS TANK IS LISTED TO UL142 AND ULC5601

*NOTE: STUB-UP AREA FOR HIGH AND LOW VOLTAGE CONNECTIONS, CIRCUIT BREAKER, NEUTRAL AND CUSTOMER CONNECTION OPENING.

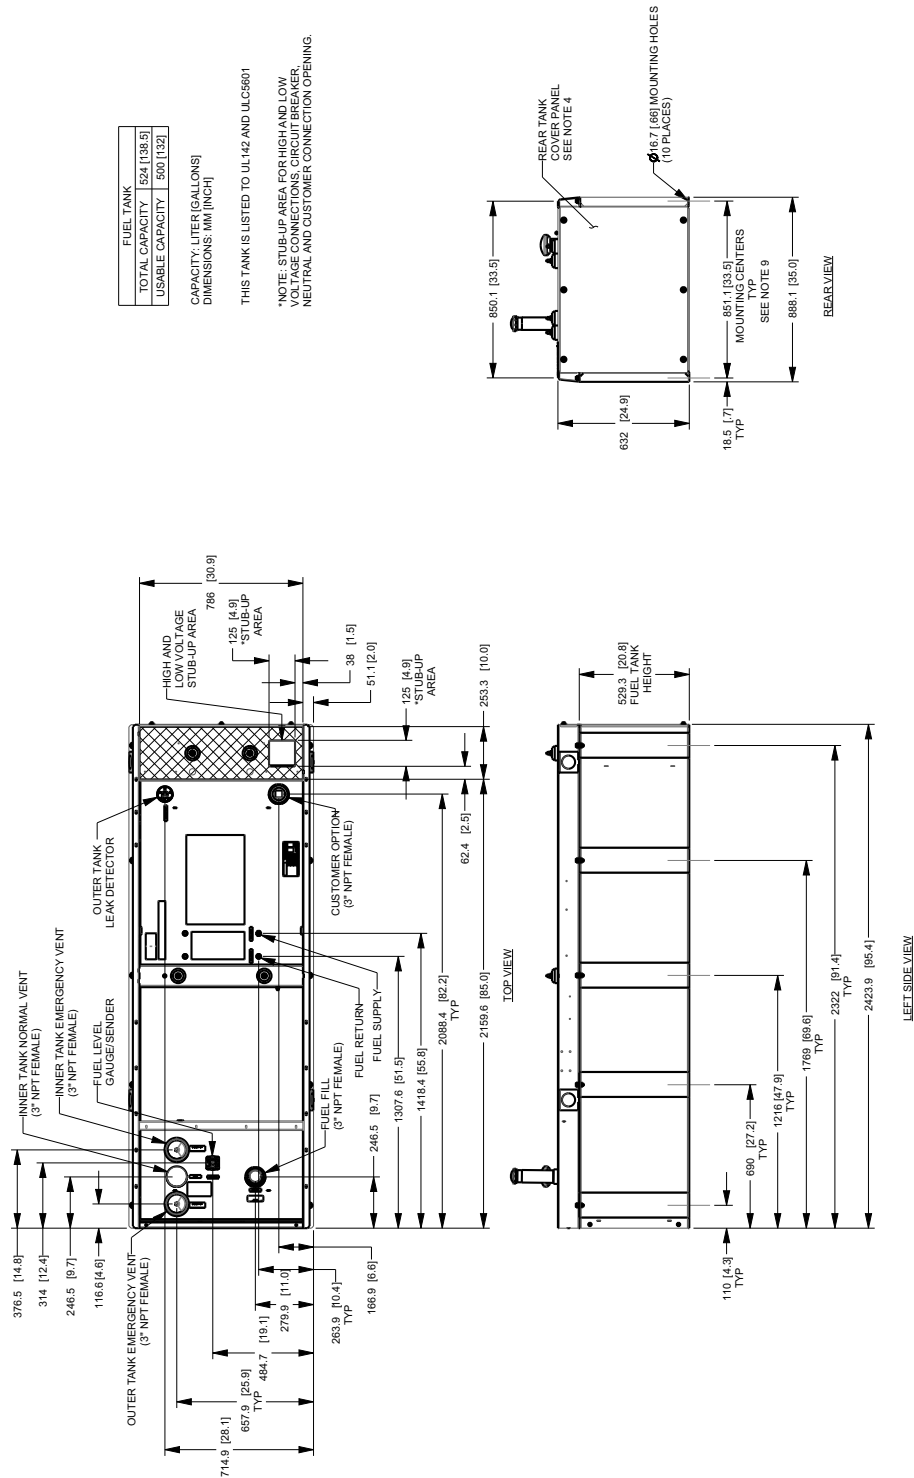

15 • 20 • 30 • 48 • 50 kW

Available Accessories

Model #	Product	Description
G006478-0	Harness Adapter Kit	The Harness Adapter Kit is required to make liquid-cooled units compatible with Mobile Link™.
G006502-0	Spill Box	The 5-gallon spill box screws into the existing fuel fill port of the base tank. It captures and contains fuel if over fueling or spilling occurs during the fill process.
G006504-0	90% Fuel Level Alarm	The 90% fuel level alarm alerts the fuel fill operator when the tank reaches a 90% fill level by sounding an audible alarm and triggering an LED warning light.
G006505-0—15 & 20 kW G006506-0—30, 48, & 50 kW	Tank Risers	Tank risers are required in some municipalities to help avoid potential base tank corrosion caused by mounting on rough surfaces.
G006507-0	Fuel Fill Drop Tube	A powder coat painted, steel fuel fill drop tube is required in some municipalities to prevent sparking due to static electricity buildup, which can be caused by the fuel dropping into the tank from the fill area. Using a drop tube also results in submerged filling, which increases the fuel delivery flow rate and reduces vapors, foam and potential tank evaporation.
G007660-0—15 & 20 kW G007661-0—30 kW G006516-0—48 & 50 kW	Stainless Steel Fuel Lines	Some municipalities require the use of stainless steel fuel lines instead of the standard hoses provided with the diesel generator products. These stainless steel lines are fire resistant for additional safety.
G006510-0	E-Stop	E-stop allows for immediate fuel shutoff and generator shutdown in the event of an emergency.
G006511-0	Spill Box Drainback Kit	The spill box drainback kit allows fuel that was captured in the 5-gallon spill box to be drained directly back into the fuel tank to avoid vapors.
G006588-1	Vent Extension Support Kit	The vent extension support kit consists of two aluminum plates with the appropriate pipe cutouts to secure the vent extension pipes coming through the top of the generator enclosure. It helps to minimize stress on the NPT fittings integrated on the tank and also helps protect against pests.
G006512-0	Lockable Fuel Cap	The cast iron, lockable fuel cap provides the ability to lock the fuel system to prevent unwanted fuel tampering or fuel siphoning.
G007640-0—15 & 20 kW G007641-0—30 kW G006570-1—48 & 50 kW	Maintenance Kits	The Protector Maintenance Kits offer all the hardware necessary to perform complete maintenance on Generac Protector generators.
G007650-0—15 & 20 kW G007651-0—30 kW G006558-0—48 & 50 kW	Cold Weather Kits	Recommended for generators installed in regions where the temperature regularly falls below 32 °F (0 °C). The Cold Weather Kits consist of a block heater with all necessary mounting hardware and a battery warmer with a thermostat built into the battery wrap.
G005703-0	Paint Kit	If the generator enclosure is scratched or damaged, it is important to touch up the paint to protect from future corrosion. The paint kit includes the necessary paint to properly maintain or touch up a generator enclosure.
G006873-0	Smart Management Module (50 Amps)	Manage large loads by utilizing up to 8 individual Smart Management modules. These devices are installed directly in line with existing appliance wiring for easy installation.