




Product Description

The 130036 LED VAPOR TIGHT Light can be used to replace traditional vapor tight with fluorescent lamps or new construction. With a sleek and contemporary design, the Beelite LED VAPOR TIGHT Light is ideal for application in factories, malls, roads, underground parking lots, subway stations, etc.


Features

- Two color extrusion Polycarbonate housing and cover, no clips
- High luminous efficiency (up to 130lm/w), low energy consumption, energy saving and environmental protection
- Product design for a CLASS II, CLASS P, using isolated power supply, safer and more reliable
- Can be used in wet environment
- Easy Installation and Maintenance Free

Luminous Intensity Distribution

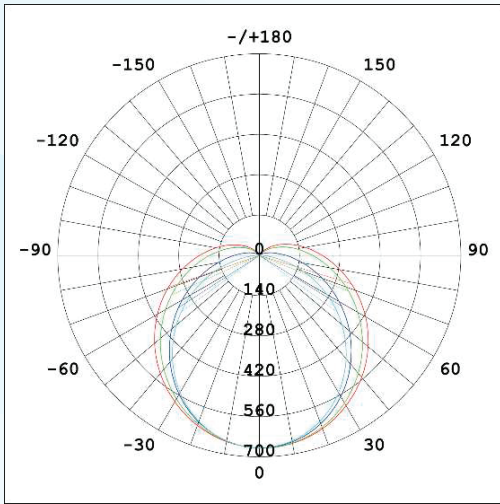

Dimensions

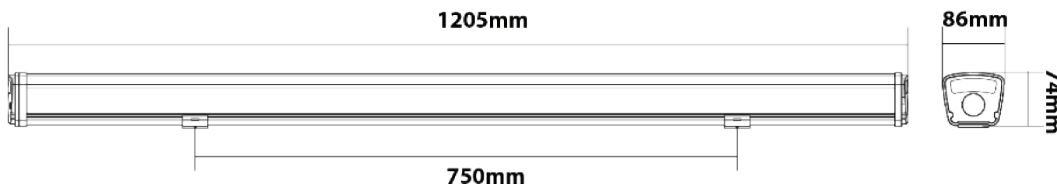

REGULATORY & VOLUNTARY QUALIFICATIONS

UL listed. Tested to LM80 standards. DLC qualified. Please refer to the DLC QPL website for the latest and most complete information. www.designlights.org/QPL

Warranty

5 years limited warranty.

Note

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C.

SPECIFICATION:

Item	130036
Power	36W
Voltage	120-277V
LM flux	4680LM
LM Efficacy	130LM/W
Power Factor	0.90
Beam angle	120°
CCT	4000K or 5000K
CRI	≥80

Material	PC
Color	White
IP rate	IP65
Working temperature	-4°F ~ 131°F
Certification	UL
Weight	3.5lb