Floor Alana



SPC FLOORING

Premium Performance, Reliable Beauty

EASY TO CLEAN | NATURAL LOOK | STAIN RESISTANCE | CIGARETTE BURN RESISTANCE | SCRATCH RESISTANCE | MOISTURE RESISTANCE | SLIP RESISTANCE | FIRE RESISTANCE

PERFORMANCE	PARAMETERS	TEST METHOD
Fire Class	Bfl-s1	EN 13501-1:2010
TVOC Emission	⩽ 0.5mg/m³	CDPH/EHLB Standard Method v1.2-2017 (California Section 01350)
Slip Resistance	Class DS	EN 13893:2003
Thermal Conductivity	0.119 W/(m·K)	EN 12664:2001
Phthalates	ND (Not Detected)	EN 14372:2004
Heavy Metals / Migration of Certain Elements	PASS	EN 71-3:2019+A2:2024
Scratch Resistance	18.0 N, no wear-through of surface coating	ISO 1518-1:2023
Castor Chair Test	No visible damage (25,000 cycles / 90 kg)	ISO 4918:2016+Amd.1:2018
IIC Impact Insulation	Calculated Impact Insulation Class IIC 62	ASTM E492-09(2016)
STC Sound Transmission	Calculated Sound Transmission Class STC 63	ASTM E90-09(2016)

SPC FLOORING

Premium Performance, Reliable Beauty

COLORS




















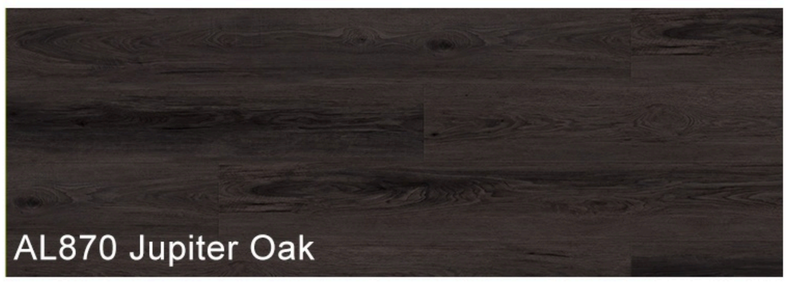

Size	60" × 9.06"	**Total Thickness**	8mm (6.5mm + 1.5mm IXPE)
Wear Layer	20 mil	**Bevel**	Painted Bevel
Pcs/Box	5	**Boxes/Pallet**	44
Sq. Ft./Box	~18.87	**Sq. Ft./Pallet**	~830.28
Lbs/Box	~55 lbs	**Lbs/Pallet**	~2,425 lbs
Locking System	UNILIN	**Waterproof**	100%
Warranty	30-Year Residential / 15-Year Commercial	**Scratch Resistance**	18.0 N, no wear-through of surface coating
Installation	Floating click, attached 1.5mm IXPE underlayment	**Origin**	Made in China

