



PRIME VINYL FLOORING

Premium Performance, Reliable Beauty



LOW-MAINTENANCE



NATURAL LOOK



STAIN RESISTANCE



ANTI-CIGARETTE



SCRATCH RESISTANCE



MOISTURE RESISTANCE



SLIP RESISTANCE



FIRE RESISTANCE


PERFORMANCE	PARAMETERS	TEST METHOD
Fire Class	Bfl-s1	EN 13501-1:2010
TVOC Range:	$\leq 0.5\text{mg}/\text{m}^3$	CDPH/EHLB Standard Method v1.2-2017 (California Section 01350)
Sliding behaviour	Class DS	EN13893:2003
Thermal conductivity	0.119 W/(m-K)	EN 12664:2001
Phthalates	ND (Not Detected)	EN 14372:2004
Heavy Metals /Migration of Certain Elements	PASS	EN 71-3:2019+A2:2024
Scratch Resistance	18.0 N -No worn-out to the surface coating	ISO 1518-1:2023
Castor Chair Test	No visible damage (25,000 cycles /90 kg)	ISO 4918:2016+Amd.1:2018
IIC IMPACT INSULATION	Calculated Impact Insulation Class IIC62	ASTM E492-09(2016) ^{ε1}
STC SOUND TRANSMISSION	Calculated Sound Transmission Class STC63	ASTM E90-09(R2016)

PRIME VINYL FLOORING

Premium Performance, Reliable Beauty



COLORS

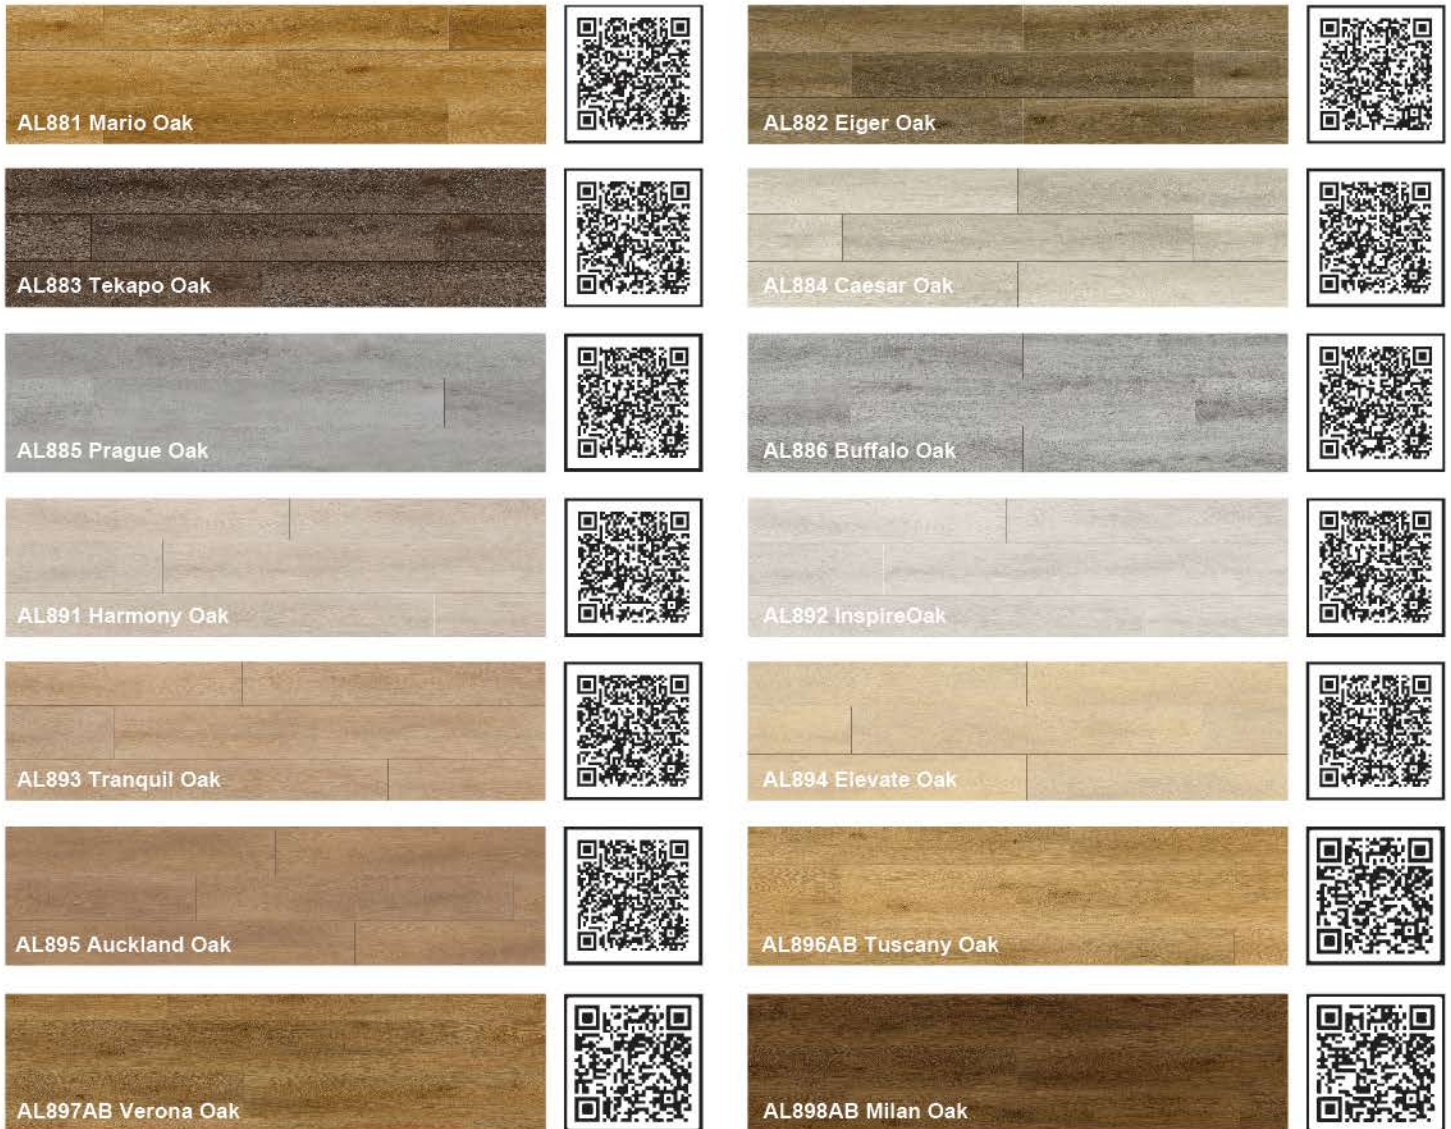

SIZE	PCS/BOX	SQFT/BOX	LBS/BOX	WEARLAYER	Bevel	TOTAL PROFILE THICKNESS
1500mm*232mm 59.06" X 9.13"	5	18.73	52.8	20 mil	Micro Bevel	8mm (6.5mm+1.5mm IXPE)

MOLDINGS

