FLOOR Alana



LUXURY VINYL FLOORING

Premium Performance, Reliable Beauty

UNILIN CE ISO 9001 ASTM floor score SGS A+

COMMERCIAL 15 YEARS WARRANTY

RESIDENTIAL 30 YEARS WARRANTY

LOW-MAINTENANCE | NATURAL LOOK | STAIN RESISTANCE | ANTI-CIGARETTE | SCRATCH RESISTANCE | MOISTURE RESISTANCE | SLIP RESISTANCE | FIRE RESISTANCE

PERFORMANCE	PARAMETERS	TEST METHOD
Fire Class	Bfl-s1	EN 13501-1:2010
TVOC Range	≤ 0.5mg/m^3	CDPH/EHLB Standard Method v1.2-2017 (California Section 01350)
Sliding behavior	Class DS	EN 13893:2003
Thermal conductivity	0.119 W/(m·K)	EN 12664:2001
Phthalates	ND (Not Detected)	EN 14372:2004
Heavy Metals/Migration of Certain Elements	PASS	EN 71-3:2019+A2:2024
Scratch Resistance	18.0 N, surface coating not worn through	ISO 1518-1:2023
Castor Chair Test	No visible damage (25,000 cycles / 198lbs)	ISO 4918:2016+Amd.1:2018
IIC Impact Insulation	Calculated Impact Insulation Class IIC62	ASTM E492-09(2016)
STC Sound Transmission	Calculated Sound Transmission Class STC63	ASTM E90-09(2016)

LUXURY VINYL FLOORING

Premium Performance, Reliable Beauty

COLORS

















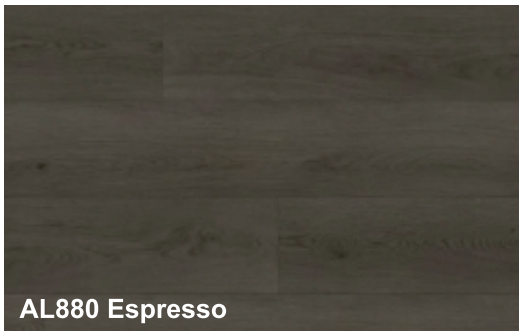




SIZE	PCS/BOX	SQFT/BOX	LBS/BOX	WEARLAYER	BEVEL	TOTAL PROFILE THICKNESS
1532x230mm 60"x9.06"	6	22.75	68.5	20MIL	Painted Bevel	8mm (6.5mm+1.5mm IXPE)


MOLDINGS



T-molding




End Cap



Reducer




Rounded-nose Stair Tread



Round Flush Stair Nose



Square Flush Stair Nose



Quarter Round



Square-nose Stair Tread