

2-112A Sindercroft Rd, Concord, ON L4K 2K1 Tel: 519-639-6174 www.skyviewwindow.com admin@skyviewwindow.com

From Factory Direct To You

SKYVIEW

Windows Manufacturing Inc.

2323 Trafalgar St, London, ON N5V 4K4 Tel: 519-601-9756 www.skyviewwindow.com admin@skyviewwindow.com







Extrusion Factory

IG Factory



Windows and Doors Factory











About Us

Skyview Windows Manufacturing Inc (Skyview) is a window and door manufacturing-subsidiary of Skyreach Group Inc. (SGI) – established in 2004 to supply windows, doors and patio doors to serve customers in Canada and USA. SkyView is a one-stop solution for all fenestration products (including windows, patio doors and entry doors) for new construction and renovation sectors.



CUSTOMER FOCUS We value all of our customers and appreciate the importance of being customer focussed.





Our product design is created with ease of installation in mind so time can be optimized as well as overall comfort and affordability for the end user.



CERTIFIED QUALITY Our patio doors are tested and certified by reputable building research authorities in Canada and US. Our suppliers are also carefully chosen and so we are able to have the utmost confidence in our patio door product offering.



Our Mission

To become a trusted supplier of patio doors by being consistent in our product quality, and creative in design and delivery.

Our Vision

To comply with tomorrow's market by offering our customers more today, better certifications and a better product design.

Our Corporate Focus

- Fostering long lasting partnerships
- Overall transparency, ethics and integrity
- Continuous creativity and product innovation
- Unique perspective in selecting supplier expertise
- Sharing ideas and valuing our employees








CLASSIC 1000 SERIES Window System

The CLASSIC 1000 Series window system is designed with architectural lines that complement the structure of any home. Its aesthetics, performance (air and water tightness), and durability, offers the homeowner security, comfort, and peace of mind. Available in a wide selection of configurations, the CLASSIC 1000 Series abides by rules of simplicity and creativity, making this "conventional Bohemian", an excellent replacement and renovation option.

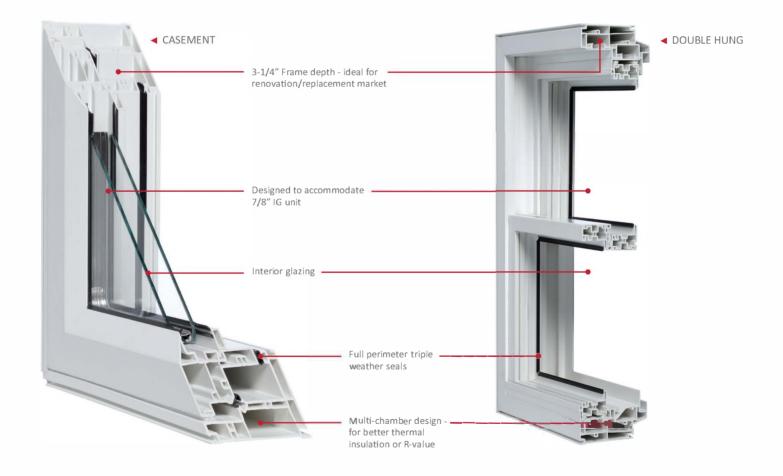


CONFIGURATIONS

| Low Fixed | Awning | Single Slider | Special Shapes: | • Arch/Round Top | Quarter Arch Window | Half-round Window | Bay Window |
|--------------------------------|---------------------------------|--|-----------------|----------------------------------|--------------------------------------|------------------------------------|--------------------------------|
| High Fixed | Single Hung | Double Slider | | Round Window | Trapezoid Window | Octagon Window | Bow Window |
| Casement | | Single Slider Lift Out | | | | | |

CLASSIC 1000 SERIES Window System

FEATURES and BENEFITS

- Wide selection of configurations: Single/Double Hung, Single/Double Slider, Tilt feature, Fixed/Picture Window, Casement, Awning, Bay Window, Bow Window, and Special-shape window.
- 3-1/4" frame depth ideal for renovation/replacement market.
- Designed to accommodate 7/8" IG unit.
- Interior glazing.
- Full perimeter triple weather seals for comfort and protection.
- Co-extruded bulb seal with option of insert pocket for easy service.
- Optional pre-installed AAMA certified weather-strip and bulb seal.
- Snap-in interlock and pull rail for easy fabrication and component reduction.
- Complete accessories: jamb extensions (different sizes), casing, brick mould, nailing flange, dry wall return, and various joiners.
- Available in selected solid colors including white, beige, and clay.
- All window models are fully tested under AAMA, WDMA, and CSA standards.
- Well complemented by the Classic 1600 Series and Hopper 4800 Series for complete window configurations, including Egress Hopper window.
- Made with 100% Virgin PVC powder compound formulated to surpass AAMA requirements.

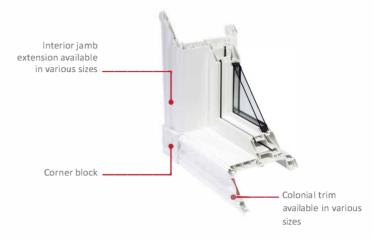

ACCESSORIES



Choose from a selection of accessories!

| PRODUCT PEF | RFORMANCE AS F | PER NAFS-08 |
|------------------------|-----------------|-----------------|
| Low Fixed | Class CW - PG70 | Type FW (Fixed) |
| High Fixed | Class CW - PG70 | Type FW (Fixed) |
| Casement | Class R - PG75 | Type C (A3) |
| Awning | Class LC - PG70 | Type AP (A3) |
| Single Hung | Class R - PG40 | Туре Н (АЗ) |
| Double Hung | Class R - PG50 | Type H (A3) |
| Single Slider | Class R - PG25 | Type HS (A2) |
| Double Slider | Class R - PG25 | Type HS (A2) |
| Single Slider Lift Out | Class R - PG40 | Type HS (A2) |

CERTIFICATIONS AND MEMBERSHIPS





Low Fixed

• High Fixed

Awning



COLONIAL 1600 SERIES Window System

The COLO NIAL 1600 Series window system is is created for renovations and replacement applications that demand the architectural style of wood windows. The Colonial exterior contour design of the frame gives the system a traditional look and feel of an artisan wood window. However, the inert vinyl material provides durability, longevity and virtually maintenance-free attributes. It is a perfect fenestration solution to dress up the front and back views of your home.



CONFIGURATIONS

| Casement | Special Shapes: | Arch/Round Top | Quarter Arch Window | Half-round Window | Bay Window |
|----------|-----------------|------------------------------------|---|---------------------------------------|--------------------------------|
| Awning | | Round Window | Trapezoid Window | Octagon Window | Bow Window |

COLONIAL 1600 SERIES Window System

FEATURES and BENEFITS

- 3-1/4" frame depth ideal for renovation/replacement applications.
- Exterior contoured frame architectural style of wood windows.
- 0.075" exterior wall thickness outstanding strength, rigidity and thermal insulation.
- Designed to accommodate IG units from 7/8" to 1-3/8" thickness suitable for double-, triple- and quadruple-pane IG units.
- Interior glazing.
- Frame and Sash profiles with multiple internal chambers exceptional structural, thermal insulation and sound-reduction characteristics.
- Smart internal wall designs for better water drainage protection against water leak.
- Triple weather seals, including double bulb seals to provide remarkable air- and water-tightness - excellent DP values.
- Designed for a variety of hardware options to provide flexibility to fabricators.
- All hardware screws are mounted through multiple profile walls additional security and durability.

- Complete accessories and common parts available: brick mould, jamb extension, interior and exterior frame moulding, nailing fin, dry wall return, and many more.
- Available in Picture/Fixed Window, Casement, Awning, Bay Window, Bow Window and Special-Shape Window.
- Well complemented by the Classic 1000 Series and Hopper 4800 Series for complete window configurations, including Hung, Slider and Egress-Hopper Windows.
- Made with 100% Virgin PVC powder compound formulated to surpass AAMA requirements.
- Available in solid white, beige, and clay.



Jamb extension available in various sizes Colonial trim available in various sizes

ACCESSORIES



Choose from a selection of accessories!

| PRODUCT | PERFORMANCE AS PER NAFS-08 |
|------------|---------------------------------|
| Low Fixed | Class LC - PG70 Type FW (Fixed) |
| High Fixed | Class LC - PG70 Type FW (Fixed) |
| Casement | Class LC - PG70 Type C (A3) |
| Awning | Class LC - PG75 Type AP (A3) |

CERTIFICATIONS AND MEMBERSHIPS











CRAFTSMAN 1200 SERIES Window System

The CRAFTMASTER 1200 Series window system was designed while keeping both the new home construction and renovation markets in mind. The system was engineered to achieve excellent thermal and operational performance while maintaining the highest level of efficient use of materials and hardware. Versatility in models and dimension make this window system the homebuilder's dream.



CONFIGURATIONS

- Low FixedHigh Fixed
- Single HungSingle Slider
 - r Tilt Feature
 - eature

• Single Lift-out Slider

Special Shapes: • Arch/Round Top • Qua • Round Window • Tra

- Top• Quarter Arch Windowlow• Trapezoid Window
- Hal f-round WindowOctagon WindowBow Window

- Casement
- Awning

CRAFTSMAN 1200 SERIES Window System

FEATURES and BENEFITS

- 4-1/4" Frame depth with wood return channel design, intended for new construction application and replacement projects.
- Common sash components with the Skyreach Classic 1000 Series window system.
- Multi-point sash locks and snubbers provide extra security, tighter seal, and greater comfort.
- Designed to accommodate 7/8" IG unit.
- Interior glazing.
- Multi-chambered profile design for better R-value.
- Co-extruded bulb seal with option of insert pocket for easy fabrication and servicing.
- Full perimeter triple weather seals for air tightness and reduction of dust infiltration.
- Compression-seal technology protects against air, water, and noise infiltration.
- Accessory grooves offer flexibility for installation of many Skyreach supplementary profiles.
- Complete accessories and common parts available.
- Available in: Casement, Awning, Picture Frame/Fixed window, Single Hung, Single Slider, Single Lift-out Slider, Tilt Feature, Bay window, Bow window and Special-shape window.
- Made with 100% Virgin PVC powder compound formulated to surpass AAMA requirements.
- Available in solid white, beige, and clay.





| PRODUCT | PERFORMANCE AS | PER NAFS-08 | |
|------------|----------------|-----------------|--|
| Low Fixed | Class R - PG75 | Type FW (Fixed) | |
| High Fixed | Class R - PG75 | Type FW (Fixed) | |
| Casement | Class R - PG75 | Type C (A3) | |
| Awning | Class R - PG70 | Type AP (A3) | |

CERTIFICATIONS AND MEMBERSHIPS





NWDA

fenestration canada





HOPPER/AWNING 4800 SERIES Window System

The HOPPER/AWNING 4800 Series window system is designed, though not limited to, basement applications. This window system meets the ever -increasing demand for basement window egress requirements. The 4800 Series window system is available for both new construction and replacement/renovation applications. Its flexible design allows for different configurations, including: transom, casement, and high-end awning windows.



HOPPER/AWNING 4800 SERIES Window System

FEATURES and BENEFITS

- Hinged at top or bottom with traditional hopper hinges, or more opening options using friction hinges.
- Designed to eliminate centre hinge bar (awning) to meet egress requirements.
- Array of hinge mounting options.
- 3-1/4" frame depth.
- Integral nailing fin.
- Multi-chambered profile design for better R-value.
- Interior glazing.
- Designed to accommodate dual and triple IG unit from 7/8" to 1-3/8".
- Triple seal compression system for superior air and water tightness.
- High quality and durable gaskets that are engineered to retain their flexibility, and are easy to replace in the event of accidental damage.
- Suitable for basement applications and other regular window applications.
- Complemented by a full range of external and internal accessories.
- Made with 100% Virgin PVC powder compound formulated to surpass AAMA requirements.












FALSE WINDOW PANELS

Fake Window System

Introducing our False Window Panel, a cost-effective solution to enhance the exterior aesthetics of your home without the need for a complete frame and sealed glass unit. Ideal for gable ends or attics, these panels are versatile and customizable.

Transform your space with our False Window Panel, available in various shapes and sizes, including arches, geometric shapes, and boxes. Elevate the charm of your home effortlessly with this stylish and budget-friendly solution.

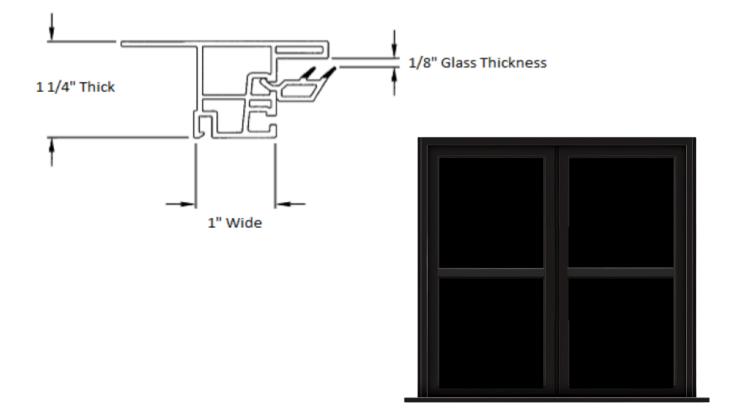






PORTICO SERIES (PD02) Patio Door System

The PORTICO Series patio door is a classic patio door with traditional right-hand (OX) and left-hand (XO) configuration. With minor adjustment during installation, this system is reversible as a right-hand and left-hand configuration. Perfect for remodelling and new home projects, the PORTICO is also available in double-operating panels (XX) patio door system—the perfect solution for a panoramic view, unimpeded ventilation, and easy access to any terrace, patio or garden oasis.

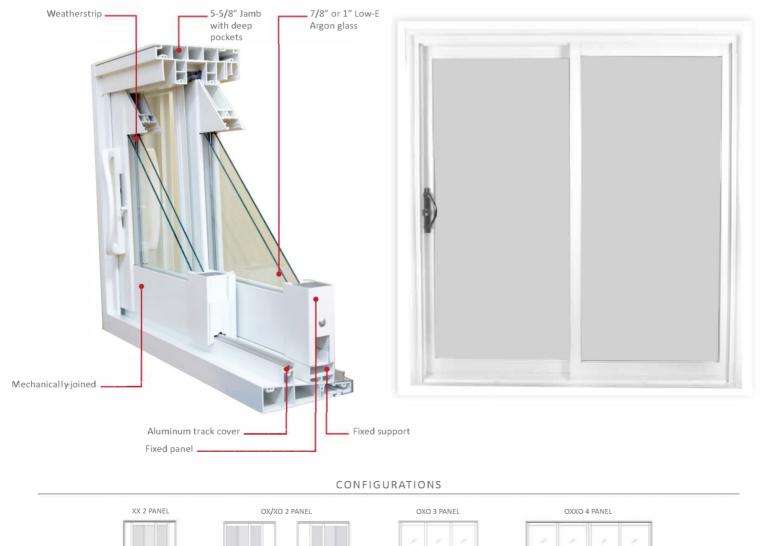

PORTICO SERIES (PD02) Patio Door System

FEATURES and BENEFITS

- All vinyl, multi-chamber profile design for superior insulating properties for your comfort and energy savings.
- Mechanically-joined frame with accessory groove in standard 5-5/8" frame depth.
- Mechanically fastened aluminum reinforced door panels for rigidity and strength.
- Standard sizes available: 5', 6' or 8' width by 6'8" and 8' height.
- AAMA certified zinc-plated, double tandem steel rollers for durability and smooth, effortless sliding.
- Corrosion-resistant, anodized-aluminum tracks for ongoing, smooth gliding operation.
- Full perimeter triple layer weather stripping for excellent air and water tightness.
- Standard "Landmark" handle (with lock and key upgrade) and available upgrade to "Prestige" series handles.
- Heavy-duty screen with heavy-gauge extruded aluminum frame and fiberglass mesh for solid frame and smooth operation.
- Specially formulated, color-matched sealing material for durability in performance and color retention.

EXTRUDED COLORS: White, blue-white, beige and clay.

Please talk to your dealer to learn more about available painted colors.

AVAILABLE COM PONENTS AND HARDWARE: Screen, rollers, handles and locks.

| | | | RODUCT | PERFOR | MANCE | | | | | |
|----------------------------|-------------------------|----------------------------------|---------------|--------|-----------------------------------|-------|-------------------------------|------|-------------------------------|------------------|
| Description | Size | Air | Wa | ter | Struct | ural | Class | PG | Reinforcen | nent |
| PD02-OX (without sill dam) | 6068 | A3 | DP35 | B3 | DP40 | C3 | R | 40 | Aluminu | m |
| PD02-OX (with sill dam) | 8068 | A3 | DP45 | B3 | DP40 | C3 | LC | 40 | 14 Ga. Ste | eel |
| PD02-OX (with sill dam) | 8080 | A3 | DP40 | B3 | DP40 | C3 | LC | 40 | 18 Ga. + 10 Ga | a. Steel |
| | | LoE 180 EN | ERGY PER | FORMA | NCE RATING | s | | | | |
| Model Code | U-factor Btu/h-ft.•F | SHGC Heat Gain Coefficient | Lay of Gla | | Infiltrati Air Leaka L/s*m2 | age N | Exfiltrat Air Lea L/s*m | kage | VT - Visible Transmittance | Energy Rating |
| PD02-AL-LOE180-7/8 | 0.32 | 0.53 | 2 | | 0.9 | | 0.9 | | 0.61 | 29 |
| PD02-AL-LOE272-7/8 | 0.31 | 0.32 | 2 | | 0.9 | | 0.9 | | 0.56 | 18 |
| PD02-AL-LOE366-7/8 | 0.31 | 0.21 | 2 | | 0.9 | | 0.9 | | 0.50 | 12 |
| PD02-STEEL-LOE366-7/8 | 0.30 | 0.21 | 2 | | 0.9 | | 0.9 | | 0.50 | 13 |
| PD02-LOE180/189-78 | 0.28 | 0.49 | 2 | | 0.9 | | 0.9 | | 0.60 | 32 |
| PD02-AL-LOE272/189-7/8 | 0.27 | 0.32 | 2 | | 0.9 | | 0.9 | | 0.54 | 23 |
| PD02-AL-LOE366/189-7/8 | 0.27 | 0.21 | 2 | | 0.9 | | 0.9 | | 0.49 | 17 |

FORMAT and PACKAGING

The PORTICO system is available in KD form which is precut and includes prepunched metal reinforcement and optional hardware. It is also available in KF format, which is similar to KD, but includes pre-glazed sashes from the factory and packaged accordingly. In FA format, the patio doors have been fully assembled in the factory.

ACCESSORY PROFILES







1-3/8" Vinyl Jamb Extension



OPTIONS







CERTIFICATIONS AND MEMBERSHIPS



UPGRADES

1" Brick Mould

1-1/2" Brick Mould


Extended Screen Track





BOULEVARD SERIES (PD04) Patio Door System

The BOULEVARD Series patio door is a high-end, welded wide sash system available in traditional right-hand (OX) and left-hand (XO) configuration. Combining the aesthetic elements of a French door with the durability and longevity one has come to expect from a door constructed with high quality PVC, the Boulevard is perfect for new home construction or renovation projects.

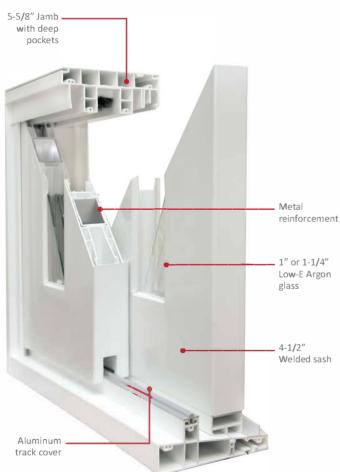



OXXO 4 PANEL

-

CONFIGURATIONS



BOULEVARD SERIES (PD04) Patio Door System

FEATURES and BENEFITS

- All vinyl, multi-chamber profile design for superior insulating
- 4-1/2" Wide stiles and rails sash.
- Welded sashes with glazing beads.
- Metal reinforcement on the vertical sash.
- Available in multi-panel configurations.
- Inside- and outside-jamb pocket covers for an elegant look.
- Standard Valiant handles with multipoint locking system.

OTHER BENEFITS

- All vinyl frame.
- Full perimeter triple layer weatherstripping for excellent air and water tightness.
- Specially formulated, color-matched sealing material for durability in performance and color retention.
- · Corrosion resistant anodized-aluminum tracks for long-lasting and smooth operation.
- Variety of aesthetically-pleasing multi-panel system combinations, custom sizes and custom finishes.



OPTIONS

Please talk to your dealer to learn more about available painted colors.

AVAILABLE COMPONENTS AND HARDWARE: Screen, rollers, handles and locks.

| | | | P | RODUCT | PERFOR | MAN | ICE | | | | | |
|---------------------|-------------------|----|----------------------------------|----------|--------------|------|----------------------------------|--------|---------------------------|-----|-------------------------------|------------------|
| Description | Size | Ai | r Wa | ater | S | truc | tural | Class | PG | | Reinforceme | ent |
| PD04-OX | 6068 | A3 | DP30 | B2 | DP3 | 30 | C2 | R | 30 | | Aluminum | |
| PD04-OX | 8080 | A3 | DP30 | B2 | DPS | 30 | C2 | R | 30 | | 14 Ga. Stee | el |
| PD04-OX IMPACT | 8080 | A3 | DP50 | B4 | DP3 | 30 | C3 | LC | 50 | 18 | Ga. Steel + Corne | r Bracket |
| | | | LoE 180 ENERG | Y PERFOR | RMANCE | RAT | INGS (1" 10 | iU) | | | | |
| Model Code | U-fact Btu/h-f | | SHGC Heat Gain Coefficient | of GÍ | ers azing | Ai | filtratior r Leakag L/s*m2 | e N Ai | iltratio Leak /s*m2 | age | VT - Visible Transmittance | Energy Rating |
| PD04-AL-LOE180-1 | 0.32 | 2 | 0.46 | 2 | 2 | | 0.3 | | 0.3 | | 0.53 | 26 |
| PD04-STEEL-LOE180-1 | 0.30 |) | 0.46 | 1 | 2 | | 0.3 | | 0.3 | | 0.53 | 28 |
| PD04-AL-LOE366-1 | 0.3 | L | 0.19 | 1 | 2 | | 0.3 | | 0.3 | | 0.43 | 12 |
| PD04-STEEL-LOE36-1 | 0.29 | 9 | 0.19 | | 2 | | 0.3 | | 0.3 | | 0.43 | 14 |

FORMAT and PACKAGING

The BOULEVARD system is available in KF format, which includes preglazed sashes from the factory and packaged accordingly. In FA format, the patio doors have been fully assembled in the factory.

ACCESSORY PROFILES











CERTIFICATIONS AND MEMBERSHIPS







1-1/2" Brick Mould

1-3/8" Vinyl Jamb Extension

Screen Track




PD06 GENESIS Series All Vinyl Patio Door



Genesis Single Slider (OX/XO) patio door is a classic patio door with traditional right-hand (OX) and left-hand (XO) configuration. The reinforced sash and cleverly-engineered stationary panel make this door a great choice for high-traffic areas.



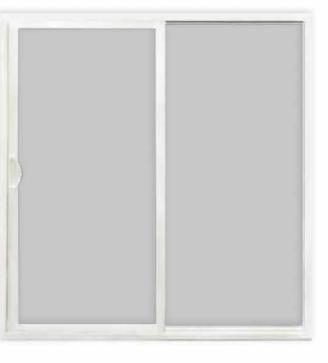


Single Slider (OX/XO)

CONFIGURATIONS



SINGLE SLIDER (OX) shown (also available in XO)



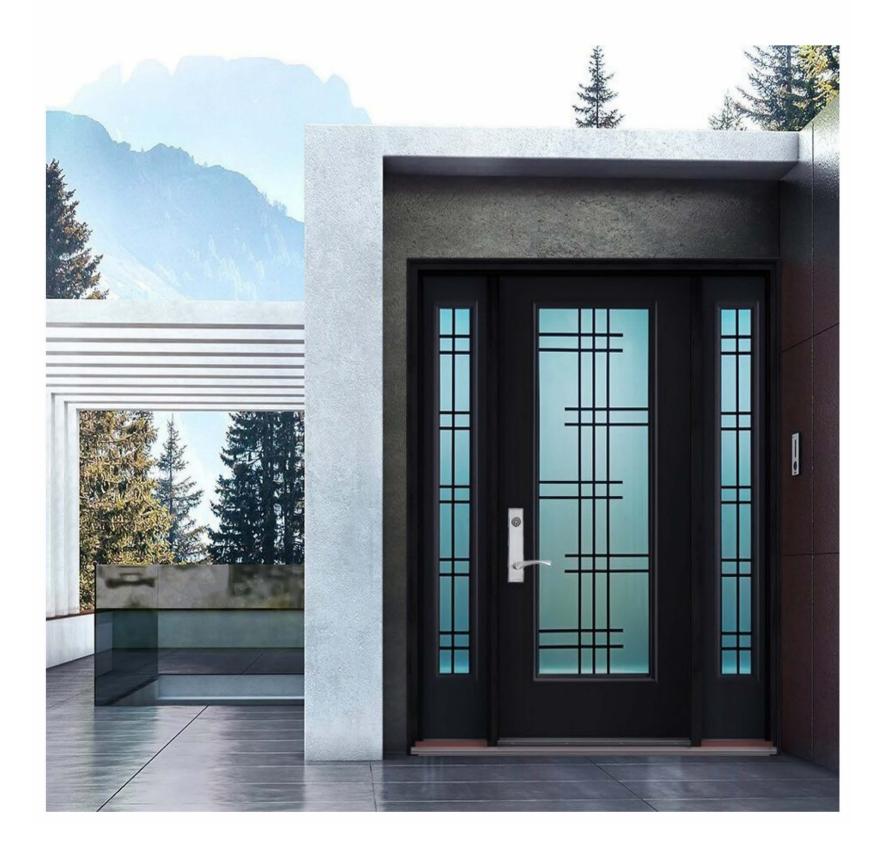

| ſ | |
|---|--|
| 4 | |
| | |
| | |
| | |
| F | |
| | |

Soho

The Soho model is remarkable. With a four panel configuration that is very popular in today's architecture.

Suggested frame profile Contemporary

Dimensions

31¾", 33¾", 35¾" × 79" 31¾", 33¾", 35¾" × 84" 31¾", 33¾", 35¾" × 95"

Available Options



 79" Door
 79" Door

 22"×48"
 22"×12"

 doorlite
 doorlite



| Π | \Box | |
|---|--------|--|
| | | |
| | | |


Victoria Shaker

The Victoria Shaker model is inspired by American architectural style. With its new embossment, this striking door is sure to pass the test of time.

Suggested frame profile Contemporary

Dimensions 31¾", 33¾", 35¾" × 79" 31¾", 33¾", 35¾" × 84"

Available Options



79" Door 22"×14 ⁷/₁₆" doorlite







Orleans

Striking entrance. The Orleans door creates a sleek, elegant entrance that stands out.

Suggested frame profile Georgian

Dimensions 31¾", 33¾", 35¾" × 79" 31¾", 33¾", 35¾" × 84" 31¾", 33¾", 35¾" × 95"

Available Options







95" Door 22"×9" doorlite

95" Door

22"×64' doorlite

95" Sidelite 7"×64" doorlite



London

London's Prestige embossment and traditional configuration unite to give this door a noble, timeless look.

Suggested frame profile Georgian

Dimensions 31¾", 33¾", 35¾" × 79" 31¾", 33¾", 35¾" × 84"

Available Options







Sydney

Unique and audacious, Sydney's three-panel configuration is a perfect match for today's popular architectural styles.

Suggested frame profile Georgian

Dimensions 31¾", 33¾", 35¾" × 79" 31¾", 33¾", 35¾" × 84"

| 9″ Door | 79" Door |
|---------|----------|

7

22"×17" doorlite

Classic Collection



6 Panel

This popular door is our undisputed best-seller. Its success is in part due to a panel configuration that allows for a range of window cutouts.

Suggested frame profile: Georgian

Dimensions 27 ¾", 29 ¾", 31¾", 33 ¾", 35 ¾" × 79" 31 ¾", 33 ¾", 35 ¾" × 84"

Available Options



79" Door 95" Door



79" Door

22"×9"

doorlite



79" Door

22"×36 doorlite



79" Door

8"×36" doorlites



4 Panel

The 4-panel door can accommodate five doorglass configurations.

79" Door

22"×9" doorlite

Suggested frame profile: Georgian

Dimensions 31¾", 33¾", 35¾" × 79" 31¾", 33¾", 35¾" × 84"





2 Panel Blank Top

The 2 Panel Blank Top owes its versatility to the free space above the panels that can accommodate a large doorglass in a variety of styles.

Suggested frame profile: Georgian

Dimensions 31¾", 33¾", 35¾" × **79"** 31¾", 33¾", 35¾" × **95"**



79" Door 22"×48" doorlite **95" Door** 22"×64" doorlite

| _ | |
|--------------|-----------|
| 79″ Sidelite | 95 |
| 8"×48" | 95 7": |
| doorlite | do |

79" Door

22"×9" doorlite

79" Door 22"×36" doorlite **79" Door** 8"×36" doorlites



79" Door

half-moon doorlite

> lite 95" Sidelite 7"×64" doorlite



| - | / | | - | |
|---|---|---|-------|--|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | _ | _ | - i - | |
| | | | | |
| | 1 | | 6 | |
| | | | | |
| | | | | |
| | | | | |

3 Panel Scroll Top

This classic model's main panel is perfect for a knocker or an oval doorglass.

Suggested frame profile: Georgian

Dimensions 31¾", 33¾", 35¾" × **79**"



2 Panel Camber Top

An elegant country-style door that can be left solid or given a camber or straight top cutout.

Suggested frame profile: Georgian

Dimensions 31¾", 33¾", 35¾" × 79"



2 Panel Planked Camber Top

Featuring rustic-looking planks, this country-style door can be left solid or given a camber or straight top cutout.

Suggested frame profile: Georgian

Dimensions 31¾", 33¾", 35¾" × 79"



79" Door

79" Sidelite 79" Door 8"×48" doorlite

22"×48' doorlite

| 79" Door | 79" Door 22"×36" doorlite |
|----------|--|


79" Door

79" Door 22"×36" doorlite




Grills


Black and White color combination available.

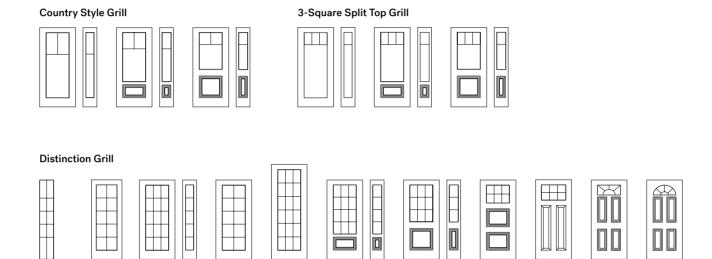

Classic Grill



Perimeter Grill






| 510015 | | | | | vv | indows Man | uractu |
|------------------------|---------|----------------|---------|---------|---------|------------|--------|
| Design Collection | | | | | | | |
| | Uno | Vog | Тао | Linea | Oso | Era | |
| Shaker Collection | | | | | | | |
| | Soho V | ictoria Shaker | | | | | |
| Prestige Collection | | | | | | | |
| | Orleans | London | Sydney | | | | |
| Classic Collection | | | | | | | |
| | 6 Panel | 4 Panel | 2 Panel | 3 Panel | 2 Panel | 2 Panel | |

Steel Doors



Doorglass

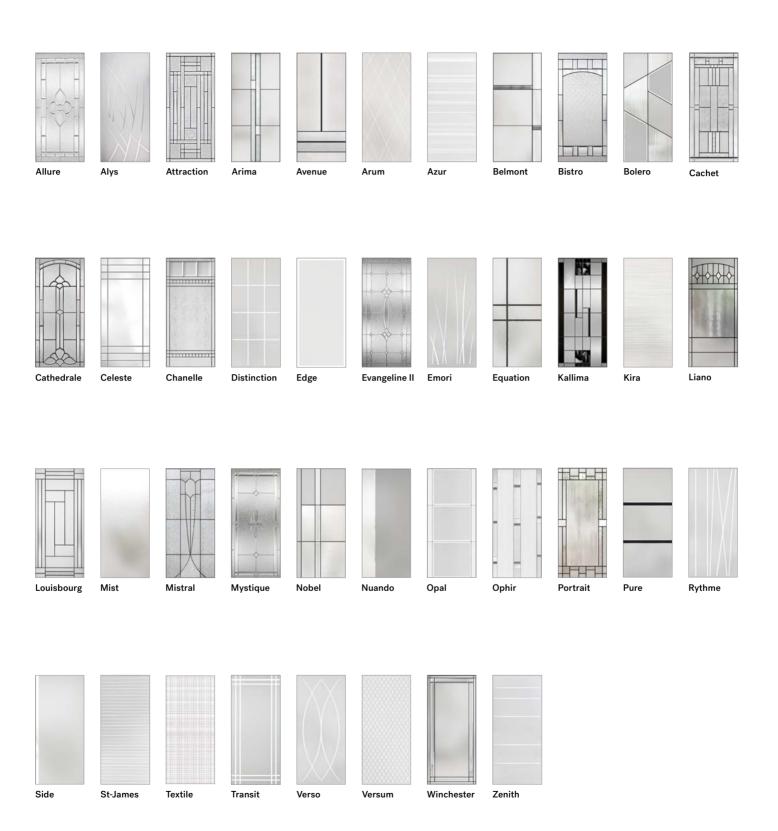

655 SERIES HIGH THERMAL PERFORMANCE FLUSH GLAZE SYSTEM



FEATURES

- High performance thermal break
- Integrated drainage
- Exterior glazed
- Accommodates 1", 1/2" & 1/4"
 glass infill
- 4 1/2"
- 2" system depth
- Dry glazing
- Compatible with a variety of Windspec doors and operable windows
- Available in anodized and painted finishes

PERFORMANCE

- U values as low as 0.30 (1" glazing)
- NAFS: Class CW-PG60
- A440- A3, C5, B7
- I-62 Double glaze



BENEFITS

The 655 Series enhances the popular flush glazing system by increasing its thermal performance. By utilizing an advanced glass-reinforced nylon thermal break, the 655 Series raises our traditional flush glazing to a new standard. Its simplicity as a stick-build system is easy to assemble and install, allowing for increase job site efficiencies.




630 SERIES PRE-ASSEMBLED SWING & SLIDE



FEATURES

- Interior lush glaze
- Non-thermally broken
- 1 3/4" x 4 1/2" pro ile
- Exterior or interior glazed
- 6mm, 10mm and 12mm glazing thickness
- Compatible with SkyView
 swing doors and sliding doors
- Optional Integrated top track

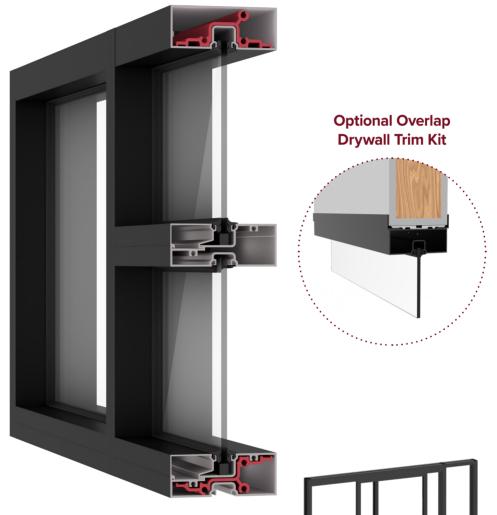



630 integrated with swing door

CROSS COMPATIBLE

ENGINEERED FOR SUPERIOR INSTALLATION EFFICIENCY



630 integrated with slide door

5500 CURTAIN WALL



FEATURES

- 2-1/2" wide profile.
- Flexible PVC thermal break.
- Mullion depths available: 2-7/8", 3-5/8", 4", 5-1/4", 6-5/8", 8"
- Overall system depth is 2" deeper than mullion depths
- Capped glazing and SSG configurations available
- Pressure equalized internal drainage (capped mullions only)
- Multiple anchoring methods



COMPATABILITY

Compatible with all Windspec Swing Doors:

- HTP doors (high thermal performance)
- Standard commercial doors
- Exposed and Flush door adaptors available

Compatible with most Windspec operable windows:

- 535 projecting vents (Awning, Hopper, Casement)
- 575 frameless projecting vents (Awning, Casement)
- 720 side slider
- 740 single and double hung
- 3-1/4" louver system
- 2-1/4" bypass louver system
- Optional integrated extruded trim system.

5500 HTP HIGH THERMAL PERFORMANCE CURTAIN WALL



FEATURES

• 2-1/2" wide profile

• Glass reinforced thermal break allows for exceptionally high thermal performance without affecting the structural integrity of the system.

Mullion depths available:
2-7/8", 3-5/8", 4", 5-1/4",
6-5/8", 8", 10".

• Overall system depth to be 2-1/4" deeper than mullion depth for double glaze and 3" for triple glazed.

• Capped glazing and SSG configurations available.

• Pressure equalized internal drainage (applies to capped mullions only).

• Multiple anchoring methods available including 'F' and 'T' sleeve anchors.

• Available expansion horizontal mullion for multistory installation.

• Optional integrated trim system.



BENEFITS

The 5500HTP curtain wall provides exceptional thermal perfomance that goes beyond current building codes.

As a stick building system, the ease of fabrication and installation make this an ideal choice for both small and large size projects.

COMPATABILITY

Compatible with all Windspec doors:

HTP doors (high thermal performance)

Standard Commercial doors


Exposed and Flush door adaptors available

Compatible with most Windspec operable windows:

535 projecting vents (Awning, Hopper, Casement)

575 frameless projecting vents (Awning, Casement)

- 720 side slider
- 740 single/double hung
- 3-1/4" louver system
- 2-1/4" bypass louver system



535 SERIES HIGH PERFORMANCE ULTRA COMPATIBLE WINDOWS




FEATURES

- 2 ¹³/16" profile
- High performance glass reinforced thermal break
- Integrated drainage
- 2 colour option
- Optional curtain wall adaptor

PERFORMANCE

- U value as low as 0.38 (1" glazing)
- U value as low as 0.30 (1 ³/₄" glazing)
- NAFS: AW-PG60

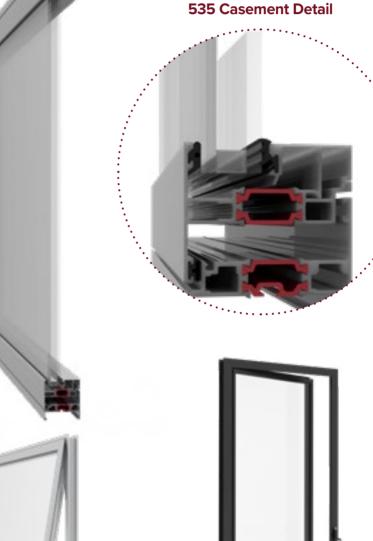



535 Hopper

535 Awning

535 Casement

925 RS HIGH THERMAL PERFORMANCE RAIN-SCREEN




DESCRIPTION

 High thermal performance rain-screen window ideal for institutional and high end residential projects

FEATURES

- 1" thick profile with 3/4" glazing fins
- 6" overall depth
- Compatible with 1" double glaze and 1-3/4" triple glaze units
- Other glazing thicknesses
 available upon request
- Pressure equalized rain-screen design
- Glass reinforced thermal break allows for exceptionally high thermal performance without affecting the structural integrity of the system

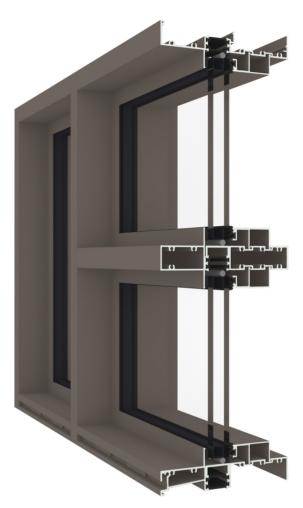

COMPATABILITY

Compatible with:

- Windspec 535 Operable Windows (Awning, Hopper, Casement)
- Windspec 575
 Frameless Awnings
- Windspec 925 Side Slider
- Windspec 925 Double Hung
- Windspec 1-7/8" louvers
- Custom gaskets and components used to optimize performance of the system
- Thermal simulations
 conducted as per NFRC



Your trusted Partner For Windows & Doors



2-112A Sindercroft Rd, Concord, ON L4K 2K1 Tel: 519-639-6174 www.skyviewwindow.com admin@skyviewwindow.com



2323 Trafalgar St, London, ON N5V 4K4 Tel: 519-601-9756 www.skyviewwindow.com admin@skyviewwindow.com