

## MFS CONTROL BOX

MFS CONTROLS



### MFS side mount

3KY845500M

Side mount control box with main engine harness (20 feet), key switch, kill switch, and tachometer lead wire. Fits 9.9-140hp remote models



### MFS flush mount - hull/starboard

3U3846000M

Flush starboard HULL mount control box with power tilt/trim switch and electric start. Control box only. For models with power tilt and electric start. Fits 9.9-140hp remote models.



### MFS flush mount - center console-right side

3U3846200M

Flush CENTER CONSOLE - RIGHT SIDE mount control box with power tilt/trim switch and electric start. Control box only. For models with power tilt and electric start. Fits 9.9-140hp remote models.



### MFS single binnacle

3U3844900M

Single binnacle mount control box with power tilt/trim switch and electric start. Control box only. Fits 9.9-140hp remote models



### Dual binnacle

HZZ3-06240-R60

Dual binnacle mount control box with power tilt/trim switch and electric start. Control box only. For models with power tilt and electric start. Fits 9.9-140hp remote models \*\*with modification.



### MFS spacer kit - binnacle

Single : 3U3843730M

Dual : HZW5-06241-U10

Optional spacer to raise binnacle (1 inch) to give more throttle handle clearance on certain applications.

# Tiller handles

## TILLER HANDLES



### MFS multi-function tiller

#### MFS25/30D

Aqua Marine Blue : 3VVQ630000  
 Beluga White : 3VWV630000



#### MFS40/50/60A

Aqua Marine Blue : 3KYQ630004  
 Beluga White : 3KYW630004



#### MFS75/90/115/140A

Aqua Marine Blue : 3SSQ630000  
 Beluga White : 3SSW630000

Offers smooth control and easy operation having key switch, big shift handle, and trim and tilt switch on the tiller handle. Includes 3 lamp warning system (40hp-140hp). Variable idle speed adjustment. Equipped with steering co-pilot.

MFS TILLER

### MFS multi-function tiller angle adjustment

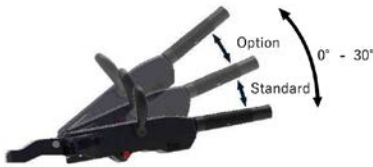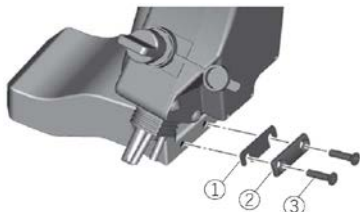

#### Only available for MFS25/30D multi-function tiller handle

The angle of the multi-function tiller handle can be adjusted between 0-30° by using the spacer kit included with the multi-function tiller handle kit. Kit includes: ①x1, ②x1 and ③x2. Options for more angle available:

Spacer① (Qty)	Spacer② (Qty)	Angle (Approx.)
0	0	0°
0	1	9.5°
1	1	14°
2	1	20.5°
3	1	23.5°
4	1	27°
5	1	30°

\*Option

Additional ① Spacers may be purchased separately and added to provide more angle to the multi-function tiller handle. Follow the chart for additional angle options.

- ① Spacer: 3VV630250M
- ② Spacer: 3VS630250M
- ③ Screw: 9216E302650M