



**Umbrella and Base parts list – (Steel base) weights not include**

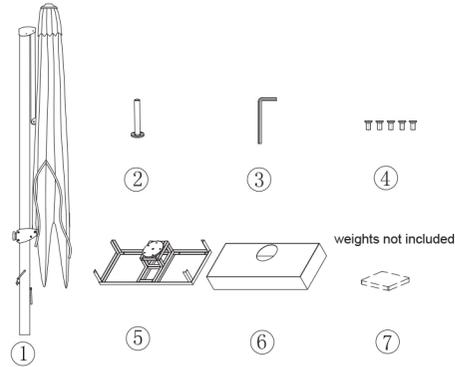



1. Put the weights into the steel plate (5). (Min. 200KGS total)
2. Screw the Adapter (2) tightly with Steel plate (5).
3. Put the steel cover(6) back to the steel plate.
4. Then ready to use.

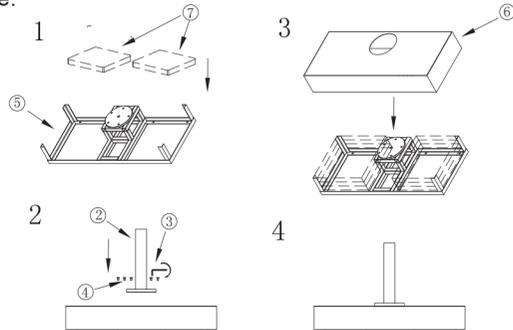

**OPERATION**

**TO OPEN THE UMBRELLA**

1. Loosen the knob counter clockwise, slide the knob up until it stops. Tighten the knob clockwise to lock position.
2. Turn the Crank handle clockwise to open the canopy.
3. Now the umbrella is ready to use.
4. Slide the knob up and down to your desired tilt.

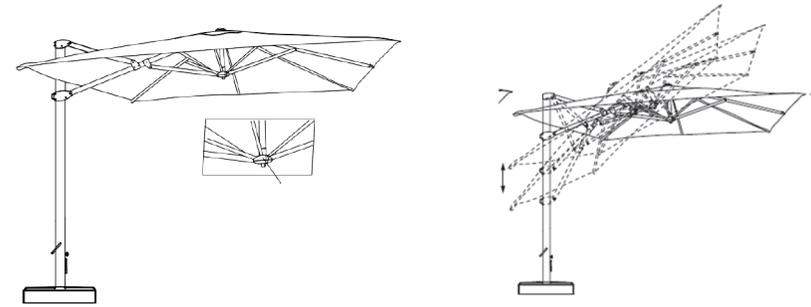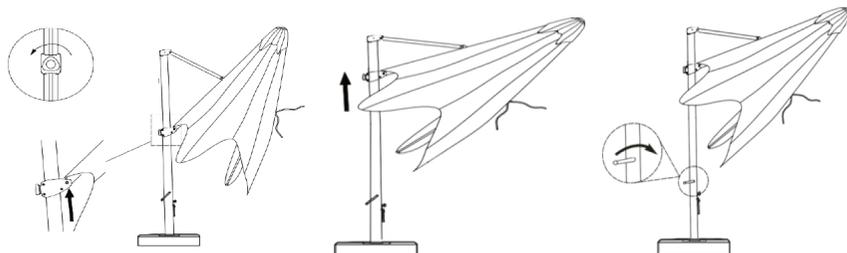

**CAUTION:**

1. Do not overwind the crank handle - stop winding when the canopy is fully open.
2. In windy conditions, check the umbrella for excess movement and if necessary, adjust the slide so that the canopy is horizontal.

**TO CLOSE THE UMBRELLA**

1. Loosen the Knob and slowly lower the runner while simultaneously turning the Crank counter clockwise .
2. When the umbrella is closed against the mast, secure the Velcro tie around the umbrella and mast to hold it closed.

