



>> RI&RO Series/Indoor&Outdoor LED Display for Rental application




Curving Capabilities

Flexible and easy to install in concave and convex configuration



High Contrast

High refresh, and high gray output, and the screen display is more high-definition and delicate

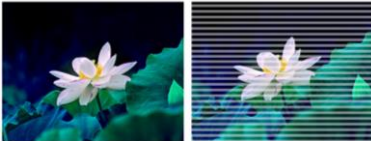


AURA DISPLAY

Others


Support 90 ° Splicing

It can be spliced with 90 ° as a magic cube shape



Mixed Cabinets Application

500x500mm and 500x1000mm two cabinet size available ,can splice up and down

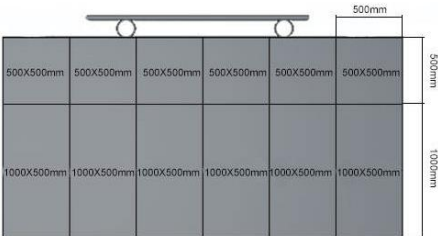

Creative Installation

Hanging Installation
Stacking Installation



Model	AD-RI-2.5	AD-RI-2.9	AD-RI-3.9	AD-RO-2.9	AD-RO-3.9	AD-RO-4.8
Pixel Pitch(mm)	2.5 indoor	2.9 indoor	3.9 indoor	2.9 outdoor	3.9 outdoor	4.8 outdoor
LED Configuration	SMD1515	SMD2020	SMD2020	SMD1415	SMD1921	SMD1921
Cabinet size(mm)	500x500/500x1000					
Cabinet Resolution(dot)	200x200 200x400	168x168 168x336	128x128 128x256	168x168 168x336	128x128 128x256	104x104 104208
Brightness	≥800cd/m ²	≥800cd/m ²	≥800cd/m ²	≥4000cd/m ²	≥4500cd/m ²	≥4500cd/m ²
Ingress Protection	IP31	IP31	IP31	IP65	IP65	IP65
Curved Degree	±7.5°					
Splicing Degree	90°					
Maintenance	Front/Rear					
Max./Avg. Power consumption(W/sqm)	800W/270W					
Working Voltage	100-240V AC50-60Hz					
Viewing Angle(H/V)	H170°V170°					
Gray Scale	16bit					
Refresh rate	≥3840Hz					
Control Mode	Synchronous display with control PC by DVI					
Support Input	Composite ,S-Video ,Component ,VGA ,DVI ,HDMI ,SDI					
Operating Temperature	-40℃～80℃(work) , storage for :-30℃～+90℃					
Operating Humidity	10%—90%RH					



Event show, Church, Wedding, Conference , TV Show, Stage background etc