



IF Plus Series Indoor Fixed LED Display

Dimensions:
640mmx480mm


Pixel Pitch:
1.25mm,1.5mm,1.8mm,2.5mm

Applications:
Shopping malls, airport, chain store, security,
monitoring, TV studio, education applications.



IF Plus Series

At **AURA DISPLAY**, we take pride in delivering superior LED screen solutions by integrating the latest advancements in technology. Our commitment to excellence ensures that each screen is crafted using state-of-the-art materials and innovative techniques, providing crystal-clear images, vibrant colors, and remarkable durability. By leveraging these cutting-edge technologies, we guarantee the best possible product quality—designed to meet the highest industry standards and exceed your expectations. Whether for large-scale events or retail displays, our LED screens bring your vision to life with precision and reliability.

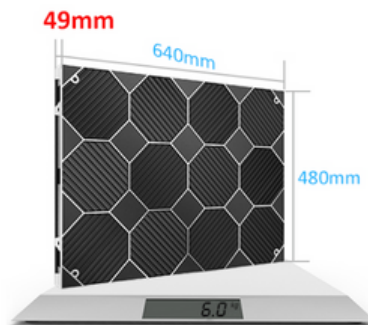


Light Weight and Ultra Thin

- 640mmx480mm cabinet is just 6kg/pc
- The thickness is 49mm


Hub Board Connection Design

- With hub pin A5S/A8S receiving card, signal transmission is much better
- Module is thinner, fast installation and splicing more flat

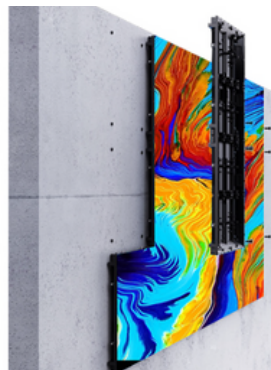


Directly Wall Mounted LED Screen

- Direct mounted to save structure cost and space
- Front installation and Front maintenance

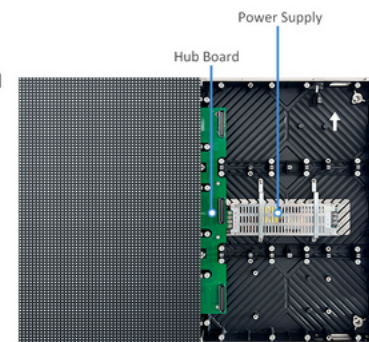

2-Year Warranty for Complete Peace of Mind

AURA DISPLAY stands behind the quality and durability of its LED screens. That's why every product comes with a 2-year warranty, ensuring that you are covered in the unlikely event of any defects or performance issues. Our warranty includes comprehensive support and prompt service, giving you confidence that your investment is protected. We are dedicated to providing not only exceptional products but also the peace of mind that comes with knowing we've got you covered—so you can focus on your business without worry.

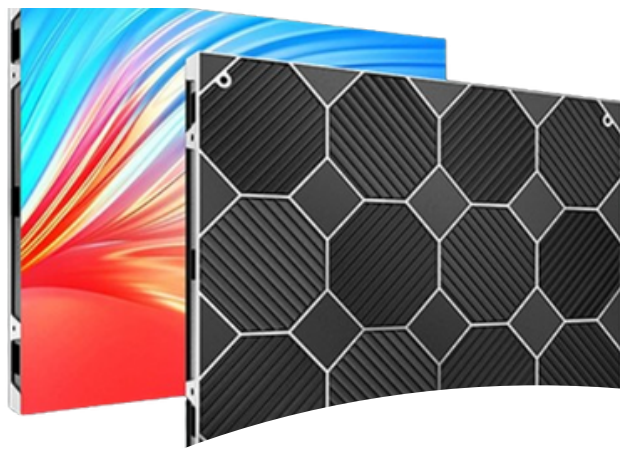


IF Plus Series

Technical Specifications

Model number:	AD-IFP-1.2	AD-IFP-1.5	AD-IFP-1.8	AD-IFP-2.5
Pixel Pitch(mm)	1.25	1.538	1.86	2.5
LED Configuration	SMD1010	SMD1212	SMD1515	SMD2121
Cabinet Size(mm)	640(W)x480(H)x49(D)			
Cabinet Resolution (dots)	512x384	416x312	344x258	2560x192
Cabinet Weight(KG)	6KG	6KG	6KG	6KG
Brightness	≥600cd/m²	≥600cd/m²	≥700cd/m²	≥800cd/m²
Ingress Protection	IP31			
Maintenance	Front/Rear			
Max./Avg. Power consumption(W/sqm)	600W/200W			
Working Voltage	100-240V AC50-60Hz			
Viewing Angle(H/V)	H170 ° V170 °			
Gray Scale	16bit			
Refresh rate	≥7680Hz			
Control Mode	Synchronous display with control PC by DVI			
Support Input	Composite ,S-Video ,Component ,VGA ,DVI ,HDMI ,SDI			
Operating Temperature	-20℃ ~ 60℃(work) , storage for :-30℃ ~ +90℃			
Operating Humidity	10%—90%RH			

IF Plus Series

Advantages




Light Weight and Ultra Thin

- Dimensions: 640x480mm
- Weight : 6kg/cabinet
- Thickness : 49mm



Directly Wall Mounted LED Screen

- Direct mounted to the wall without structure
- Front installation & Front maintenance



Hub Board Connection Design

- With hub pin A5S/A8S receiving card, signal transmission is much better
- Module is thinner, fast installation



Sales@auradisplay.ca



www.auradisplay.ca

