

IP65 waterproof & Dustproof

- IP65 waterproof rating cabinet. It can be installed and exposed to the air without extra enclosure.




Outdoor High Brightness & High Contrast

- 5000-7000nits high brightness , visible in the sun.
- Big viewing angle.
- High Definition Display



Model	AD-OF-2.5	AD-OF-4	AD-OF-5	AD-OF-6	AD-OF-8	AD-OF-10
Pixel Pitch(mm)	2.5mm	4mm	5mm	6mm	8mm	10mm
LED Configuration	SMD1415	SMD1921	SMD2727	SMD3535	SMD3535	SMD3535
Cabinet Size(mm)	960x960mm					
Cabinet Resolution(dots)	128x128	240x240	192x192	144x144	120x120	96x96
Cabinet Weight(kg)	28kg/m ²					
Brightness	≥5000-7000cd/m ²					
Ingress Protection	IP65					
Maintenance	Rear					
Working Voltage	100-240V AC50-60Hz					
Viewing Angle(H/V)	H170°V170°					
Gray Scale	16bit					
Refresh rate	≥3840Hz					
Control Mode	Synchronous display with control PC by DVI					
Support Input	Composite ,S-Video ,Component ,VGA ,DVI ,HDMI ,SDI					
Operating Temperature	-40℃～80℃(work) , storage for :-30℃～+90℃					
Operating Humidity	10%—90%RH					

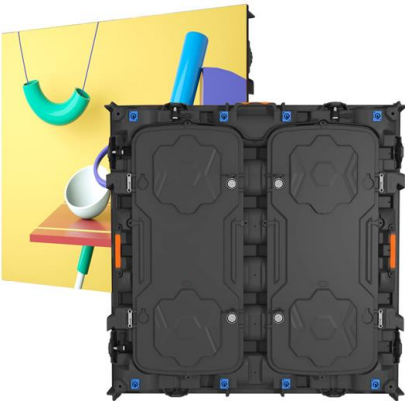

OF Plus series
Outdoor Advertising LED Display

Dimensions: 960x960mm
Pixel Pitch: 2.5mm,4mm,5mm,6.67mm,8mm,10mm
Applications: City squares, commercial pedestrian streets and various transportation hubs, school, hotels etc.



Seamless Splicing

- Seamless splicing for a better display effect
- Ultra Low Noise Operation



Magnesium Alloy Cabinet

- Super light weight, just 28kg/pc
- Fast heat dissipation
- Easy maintenance
- Save the transportation cost and labor cost